Feather Edge Skirting

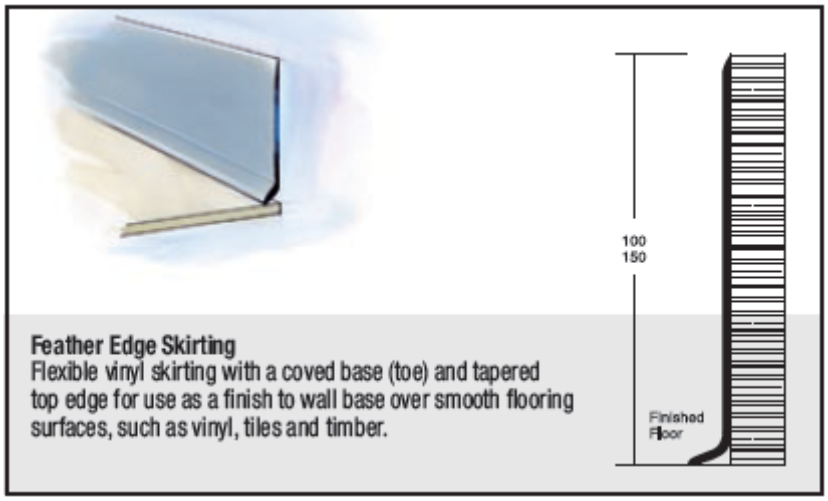

Dimensions in millimeters and are nominal

Product Attributes
Armstrong flooring accessories are manufactured under strict quality control from a blend of high quality raw materials and are designed to colour co-ordinate with Armstrong resilient flooring ranges and current interior design trends.

Feather Edge Skirting
A flexible vinyl skirting with a coved base (toe) and tapered top edge for use as a finish to wall base over smooth flooring surfaces, such as vinyl, tiles and timber.

Armstrong CX Skirting
- 12 colour ways
- Durable semi-gloss colours for ease of maintenance
- Embossed surface finish for increased scratch & scuff resistance
- Highly flexible for easier installation

Armstrong Standard Skirting
- 12 colour ways
- Subdued matte hues for a subtle finish
- Flat surface finish
- The industry standard

Available in CX or Standard formulation
- 100mm x 15 metre coils
- 150mm x 15 metre coils

Custom colours are available on request in either CX or Standard Formulation. Contact your Armstrong Representative or Customer Service for further information.

Specification

Where noted in the specification and/or schedule of finishes install Armstrong Feather Edge Skirting **Standard** or **CX** formulation **100mm** or **150mm**. (Formulation, colour and size as specified).

When installing to finish upon **vinyl** or **hard floor** surfaces such as sheet vinyl or tile; Armstrong Feather Edge Skirting shall be installed to the face of the wall; finishing so that the base of the skirting sits neatly upon the substrate.

Installation

Installation of Armstrong flooring accessories must conform to AS 1884-1985. Special attention should be paid to AS1884-1985 section 2.1.1.3 Surface.

Feather Edge Skirting

Substrate

Armstrong flooring accessories are suitable for installation on most internal building materials (such as concrete, timber, hardboard and rendered surfaces).

Inspection of the substrate; it shall be the responsibility of the sub-contractor to thoroughly examine the walls and doors prior to the application of vinyl sheet & accessories.

Wall surfaces must be dry, clean, smooth, structurally sound and free from moisture, alkali, dust, dirt, wax, oils, grease, loose paint or plaster, or any other foreign matter.

Rectification to imperfections in the surface of the substrate shall be made good prior to fixing vinyl sheet & accessories.

Set out
To achieve a straight/level finish of skirting; ensure that the desired finished height is marked at all external and internal corners. Strike a chalk-line between each point to act as a guide.

Fitting
All material should be checked in good natural light for obvious defects prior to fitting; if material has defects immediately contact your supplier.

All fitting work should be carried out before applying adhesive

Install Armstrong Feather Edge Skirting to finish at wall/floor junction as specified ensuring that edges are straight and level.

Feather Edge Skirting can be mitred or wrapped around external corners, and can be scribed and mitred or wrapped with a V-shaped notch in the toe at internal corners. Tight external corners may require a groove to be cut from the back of the skirting where the corner will be positioned at a depth of 1/4 of the material.

CX Skirting should be scribed and cut into internal corners and can be wrapped around external corners. Wrapped external corners will require a groove to be cut from the back of the skirting where the corner will be positioned at a depth of 1/4 of the material.

Maintenance
Damp wiping with a neutral cleaner (Armstrong Once n Done) for general maintenance. For **Standard Skirting** a light application of liquid floor polish/finish (Armstrong Shine Keeper) can be used for added protection and to maintain gloss level. Solvent-based waxes or ammonia-based cleaners should be avoided.