

SUPRAFINE XL

15mm (9/16") Exposed Tee System



Key Selection Attributes

- Hot dipped galvanized coating inhibits red rusting better than electrogalvanized, painted or tin plated systems
- Rotary-stitched during manufacture by a patented method (US & Foreign) for additional torsional strength and extra stability during installation
- XL staked-on end detail provides

secure locked connection; easy to remove, reuse and relocate

- Minimum web height of 32mm on all components to provide a square, level and maintain integrity of system
- System is engineered and designed to fit and provide a finish to coordinate with all of Armstrong Ceilings.
- 10-year limited warranty; 15-year with HumiGuard™ Plus products

Typical Applications

- Offices
- Schools
- Hospitality
- Retail
- Healthcare

Recycled Content:

25%

Color



White (WH)

Visual Selection





Performance Selection

GRID FACE	ITEM NUMBER	DESCRIPTION	DIMENSIONS	HANGER SPACING* (kg/m, Simple Span)	ASTM/ DUTY CLASS
SUPRAFINE Main Beams				1200mm 1500mm	
15mm 9/16"	BP754033 7500	3600mm ID Main Beam 12'	3600 x 15 x 38mm 144 x 9/16 x 1-1/2"	19.60 9.90	ID
15mm 9/16"	BP7542102 BP7547102	3000mm LD Main Beam 10'	3000 x 15 x 32mm 120 x 9/16 x 1-1/4"	- -	LD
SUPRAFINE XL					
15mm 9/16"	BP753033 BP753733	1200mm Cross Tee 4'	1200 x 15 x 38mm 48 x 9/16 x 1-1/2"	- -	-
15mm 9/16"	BP7530102 BP7537102	1200mm Cross Tee 4'	1200 x 15 x 32mm 48 x 9/16 x 1-1/4"	- -	-
15mm 9/16"	BP752032 BP752732	600mm Cross Tee 2'	600 x 15 x 38mm 24 x 9/16 x 1-1/2"	- -	-
15mm 9/16"	BP7520102 BP7527102	600mm Cross Tee 2'	600 x 15 x 32mm 24 x 9/16 x 1-1/4"	- -	-
Molding					
14mm	BP784203	3000mm Shadow Molding	3000 x 14 x 7 x 7 x 19mm	- -	-

* Simple Span

ASTM Class
HD - Heavy-duty
ID - Intermediate-duty
LD - Light-duty

Details

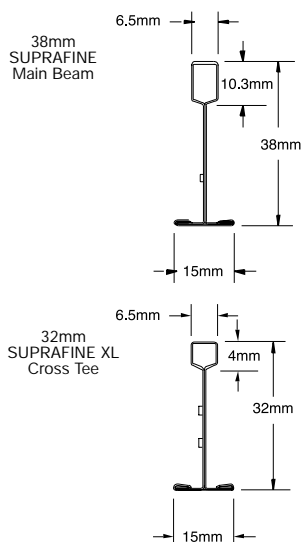

SHANGHAI
Phone: (8621) 6391 3366
Fax: (8621) 6391 3399

BEIJING
Phone: (8610) 6510 2818
Fax: (8610) 6510 2821

GUANGZHOU
Phone: (8620) 8375 3862
Fax: (8620) 8375 3861

HONG KONG
Phone: (852) 2585 7800
Fax: (852) 2598 7113

www.armstrong-asia.com

SUPRAFINE XL

15mm (9/16") Exposed Tee System

Physical Data

Material

Hot dipped galvanized steel

Surface Finish

Baked polyester paint

Cross Tee/Main Beam Interface

Override

End Detail

Main Beam: Coupling

XL Cross Tee: Staked-on clip

Profile

Exposed tee system

Classification

Intermediate duty, Light duty

Warranty

See pages 92-93 for details

DUNE with SUPRAFINE 15mm (9/16") Exposed Tee grid



SUPRAFINE
15mm (9/16")
Exposed Tee grid



SUPRAFINE Main
Beam



SUPRAFINE XL
Cross Tee

