

INSTALLATION INSTRUCTIONS

5-in x 84-in x 3/8-in
12.7 cm x 213.36 cm x 9.525 mm

10 planks | 29 sq.ft.

IMPORTANT INFORMATION

- Open cartons 2–3 days prior to the install and allow material to adjust to the relative humidity in the space where it will be installed. Maintain consistent humidity levels after installation.
- Ensure proper gaps are maintained around the perimeter of the room and all obstructions.
- Ensure the surface is level and planks are able to slide freely within their clips.
- This is a floating ceiling and planks should not be attached directly to trim, molding or walls in a ceiling application.
- Never span more than 21-ft without an expansion joint (cover with trim).

WoodHaven™
CEILING PLANKS

Inspiring Great Spaces®

Armstrong®
CEILINGS

WoodHaven™ Ceiling Plank Installation Instructions

We are constantly working to improve our instructions with learnings from customers like you. For the most up-to-date instructions, please visit ceilings.com/installwoodhaven. If you need additional guidance, call our Techline at 1-877-ARMSTRONG (276-7876).

We recommend installing WoodHaven™ planks using the Easy Up® track and clip system. However, the clips and screws included in the box, when used with furring strips and shims, are suitable for installations that meet the following conditions:

- Ceiling surface is easily leveled with furring strips and shims.
- Room will not experience broad humidity and temperature differences from season to season.
- Planks installed on non-flat ceilings, such as vaulted or cathedral ceilings. **If you have a sloped surface (not covered in these instructions) contact Techline at 1-877-ARMSTRONG (276-7876) for guidance.**

WoodHaven Planks can also be installed on 15/16-in ceiling grid, using the Easy Up® clips.

Space Considerations – Before You Begin

- The system is a floating system that allows for natural movement of a home. Ensure that the surface is level and planks are able to slide freely within their clips. Unlike lumber, which can twist and warp, this system does not require nails/screws at each edge to stay flat.
- Never span more than 21-ft without an expansion joint (cover with trim). **NOTE:** do not attach the planks directly to trim, molding, or wall.
- Open cartons 2–3 days prior to the install and allow material to adjust to the relative humidity in the space where it will be installed. Maintain humidity levels after installation.
- Installation must not be direct to exterior roof joist. Furring strips or Easy Up® tracks will provide the required 1/2-in gap between planks and above surface. Do not allow anything to touch the back of the planks, such as insulation.
- Planks should not be installed below embedded radiant heat coils.
- Allow for a 1/4-in gap around all columns, beams and obstructions.
- Plan for lighting or other fixtures that may be included in your room:
 - Mount electrical boxes so they are 3/8-in lower than the surface to which you will attach planks. (Remember to add for height of Easy Up track (1/2-in) or furring strip. With Easy Up tracks, total drop will be 7/8-in).
 - Use light fixtures that will not raise the temperature of the planks above 230° Fahrenheit to prevent discoloration of the plank. Contact the lighting manufacturer for any questions about the amount of heat generated by the light.
 - Allow for a 1/4-in of space around the perimeter of the fixture, to be covered by the fixture trim or facer.
- **Uncertain of how these considerations impact your project—call for guidance at 1-877-ARMSTRONG (276-7876).**


Safety

- **CAUTION: Wood Dust.** Sawing, sanding and machining wood products can produce dust. Airborne wood dust can cause respiratory, eye and skin irritation. Establish and maintain adequate ventilation in the work area.
- Wear long-sleeve clothing and gloves.
- Wear safety glasses to minimize the risk of eye injury.
- Store cutting equipment properly when not in use.
- Follow manufacturer's instructions when working with adhesives for beaded plank installation. Armstrong does not guarantee the performance of adhesives.

Maintenance Hints

- Wipe with a damp cloth

Tools Needed:

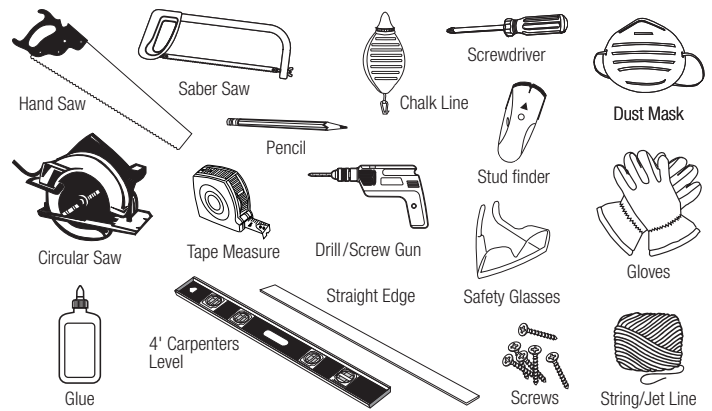


- For can lights/ceiling inserts: jig saw or dremel
- Crown molding >1.5-in
- Be sure to follow the manufacturer's recommendations when using power tools.
- **For WoodHaven™ Plank with Easy Up® track and clips instructions only:** Armstrong® Easy Up® tracks and clips.
- **For WoodHaven Plank Clips and Screws instructions only:** also add furring strips and shims.

Installing WoodHaven™ Planks with Easy Up® tracks and clips:



In this example, we are installing WoodHaven planks with Easy Up track and clips over unfinished drywall. You can also install planks direct to floor joists or studs, or other existing ceilings, using the same Easy Up tracks.



When installing directly to an existing ceiling, find joists and mark with chalk line. **(photo A)**

Running perpendicular to the joists, mark where tracks will be placed. Start 2-in from the starting wall. Spacing is 24-in on center or less. **(photo B)**



Ensure that you do not have tracks running directly over light fixture holes or other ceiling obstructions. Adjust tracks by reducing space between tracks (never greater than 24-in spacing) **(photo C)**




Screw first Easy Up track, making screw connections at each joist location. Start on your mark, 2-in from the parallel wall, with the end of the track against the perpendicular wall. **(photo D)**



Attach second track. No need to place end-to-end. Simply overlap tracks, side-by-side, by at least 1-in. Leave a 1/8-in gap between tracks. **(photo E)**

If you need to cut track pieces shorter, use a chop saw or hack saw. Ensure you have the right blade for metal. Do not crush track, as clips would not fit. And remember your protective safety glasses and cut resistant gloves.



It is imperative to level your tracks. Simply use a bubble level and insert shims (loosen screw and tighten to get a level track). Check both levels in the direction of the track (parallel), as well as across tracks (perpendicular). **(photo F)**



Continue screwing tracks to joists in the ceiling. At the finishing wall, install the last track 2-in away from the wall. **(photo G)**

(In this picture, note that the installers didn't have to cut any metal pieces. Overlapping the track by more than an inch is fine!)

Determine Your Layout and Size of Your Border Planks. Measure the length of the room, in the direction of your tracks, and opposite the joists, to determine the size of your border planks.

| | Example: | Your Room: |
|------------------------------------|-------------------------|-------------------|
| 1. Total room length | Room = 178" | _____ |
| 2. Divide total by 5" | $178" \div 5" = 35.6$ | _____ |
| 3. Multiply the remainder by 5" | $0.6 \times 5" = 3"$ | _____ |
| 4. Add 5" to the result | $3" + 5" = 8"$ | _____ |
| 5. Divide results by 2 | $8" \div 2 = 4"$ | _____ |
| 6. This is your border plank width | Border plank width = 4" | _____ |



This is your first row of planks. Cut the "tongue" side off of the length of the plank for your first border plank. **TIP:** Using a table saw or circular saw helps to ensure a clean straight line. **(photo H)**



Leaving 1/2-in from the starting wall (closest to the end of the plank), screw the 1st border plank in the center of the plank right up against your starting wall, with one screw connecting with the track. **(photo I)**



Only use one screw to hold the plank in place while you move the Easy Up® clips into the groove edge of the plank. Your future molding will hold the planks in place. **TIP:** Another option is to use three finish nails as a ledge, located directly under the face of the plank, on which you can rest the plank while you slide the clips into place.



Snap an Easy Up Clip onto every track. **(photo J)**

Slide the clip on the track until it connects with the "Groove" of the plank. The clip should loosely hold the upper edge of the groove on the plank. **(photo K)**



Continue to build your ceiling by connecting the tongue and groove on the long side and end of the plank. Ensure a 3/4-in gap* on finishing wall to allow for expansion. This will be covered by molding. **(photo L)**

*A 7-ft plank can expand/contract as much as 1/4-in under extreme

humidity changes. This gap allows for normal expansion and will be covered by molding. Consistent humidity levels must be maintained after installation.



Layout the room with staggered seams. In most installations, you should be able to use the leftover cut plank from one row to start the next row, with very little waste. Do not use planks smaller than 26-in to ensure attachment with two clips. **(photo M)**



The tongue of the new plank will slide into the groove of the receiving plank, hiding the Easy Up clip.

Double check your math for the width of the last plank. Measure the remaining distance to the wall, and cut off the groove edge of the plank to fit the space. There should be a 3/4-in gap at the border. Tip the tongue of the plank into the groove of the receiving plank. **(photo N)**



Support the last plank by either screwing it to the Easy Up track with a single screw **(TIP: Pre-drilling helps)** or create a ledge using finishing nails

hammered every 24-in into the wall directly below the face. (Molding will hide screw or nails) **(photo O)**

We recommend finishing the job with crown molding (not sold by Armstrong Ceilings), painted to match other trim in your space.

A slightly damp rag will remove any dust from your install, leaving you with a beautiful new ceiling.

Installing WoodHaven™ Planks Directly to Ceiling Joists with Furring Strips and WoodHaven Clips:

Locate ceiling joists if not exposed. Tap on the plaster or drywall ceiling until you hear a solid thud, or use a stud finder. Generally, joists are spaced 16-in or 24-in on center. If not exposed, mark with a chalk line. Level and attach furring strips perpendicular to the joists, starting 2-in from the first wall. Spacing should not exceed 24-in on center. **If you have a sloped surface (not covered in these instructions) contact Techline at 1-877-ARMSTRONG (276-7876) for guidance.**


Determine Border Plank Size for a Balanced Appearance

| | Example: | Your Room: |
|--|-------------------------|-------------------|
| 1. Measure room width same direction as the joists | Room = 178" | _____ |
| 2. Divide by 5" | $178" \div 5" = 35.6$ | _____ |
| 3. Multiply the remainder by 5" | $0.6 \times 5" = 3"$ | _____ |
| 4. Add 5" to the result | $3" + 5" = 8"$ | _____ |
| 5. Divide result by 2 | $8" \div 2 = 4"$ | _____ |
| 6. Record your border plank width | Border plank width = 4" | _____ |

Install Planks

Snap a Chalk Line

1. Measure the calculated border plank width and snap a chalk line at that distance from the front wall.



Cut First Border Plank

1. Familiarize yourself with the plank edges and face before you begin cutting your first plank. **(illus. A)**
2. Cut the first row of plank to the border plank width, removing the

tongue edge. **TIP:** Using a table saw or circular saw helps to ensure a clean straight line.

Installing WoodHaven™ Planks on a 15/16-in Suspension System with Easy Up Clips:

Important:

- Do not install WoodHaven planks over an existing acoustical tile ceiling. If you are updating an existing 15/16-in suspension system, be sure to remove the ceiling panels prior to installing WoodHaven planks.
- If you need instructions for installing a new Armstrong® Prelude® suspension system, please visit ceilings.com/installation.
- Clips included in the WoodHaven packaging will only be utilized when a plank's leading edge lands on or near a parallel grid piece. See tip below.
- Easy Up clips are sold separately. Visit ceilings.com to order a sample Easy Up clip to test your grid. Clip should snap on with a snug fit, be able to slide on the grid, and require some force to remove.

Determine Plank Direction

- Install planks perpendicular to the cross tees, parallel to the main beams on a 2-ft x 4-ft grid system.
- Install planks perpendicular to or parallel with the cross tees on a 2-ft x 2-ft grid system.

NOTE: A 2-ft x 4-ft system can be converted to a 2-ft x 2-ft system by adding 2-ft cross tees.

TIP: If a plank's leading edge lands on or near a parallel grid piece, the Easy Up clips will not line up correctly with the plank. Use a WoodHaven clip provided with the plank packaging to screw the clip directly to the grid.

TIP: When starting or ending a WoodHaven Plank installation on 15/16-in suspension system, screw the plank directly to the wall molding in lieu of furring strip.

Please follow the "Installing WoodHaven Planks with Easy Up" instructions to install WoodHaven Planks on a 15/16-in suspension system and start at "Determine Your Layout and Size of Your Border Planks."

WoodHaven™ Wainscoting and Wall Installation Instructions

WoodHaven Painted White (1148) and Beadboard (1149) planks can also be used as a wainscoting or accent wall.

Open cartons 2–3 days prior to the install and allow material to adjust to the relative humidity in the space where it will be installed. Maintain humidity levels after installation.


Tools Needed:

Hand saw, circular saw (optional), saber saw (optional), measuring tape, chalk line, cordless or hand screwdriver and pencil. When using power tools, be sure to follow the manufacturer's recommendations for their use.


To prevent wet floors from damaging the planks, install a piece of 3/8-in thick lath on the wall at the floor so the bottom of the planks can butt against the top of the lath.

While the traditional orientation of wainscoting is vertical, the WoodHaven planks can be installed on walls either vertically or horizontally.

When installing the planks vertically, you should use a construction adhesive to secure the planks to the wall. Be sure to check that the adhesive is suitable for the wall surface you are adhering to. Follow the adhesive manufacturer's recommendations for surface preparation and application rate. If the planks do not stick to the wall immediately, use painter's tape to hold the planks to the wall until the adhesive sets up. (illus. G)

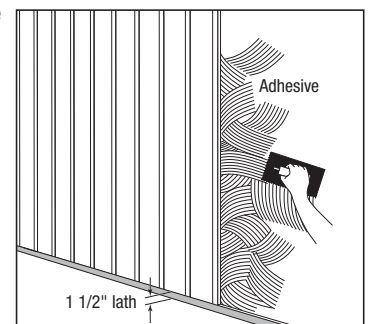


illus. G



illus. B

the furring strips and screw clips to the underside of the furring strip. Ensure screws are installed straight into furring strip. If installed at an angle, the screw head could interfere with installation. **NOTE:** Plank's groove must slide freely with the clip. Tightening the screw too much could cause the clip to twist and keep the planks from floating properly. Ensure the clips are level.


3. Continue measuring, cutting and installing first row of planks. Cut last plank to the length that leaves a 3/4-in gap at the opposite side wall. (illus. C) **NOTE:** 1/2-in and 3/4-in gap are critical for normal expansion and contraction. The gaps will be covered by crown molding.




illus. C

Instructions if Installing Item 1149 Bead Board:

Plank ends meet with a shiplap joint. When you install the second plank with the shiplap joint facing up (illus. D) apply a small amount of water-based wood glue to the joint. Any material expansion due to room conditions will take place at the ends of each course of plank.

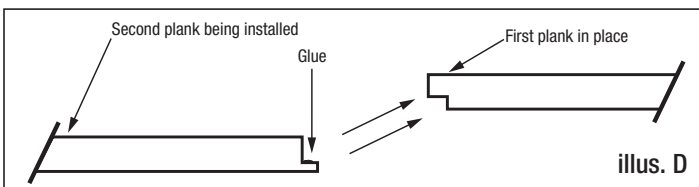

illus. D

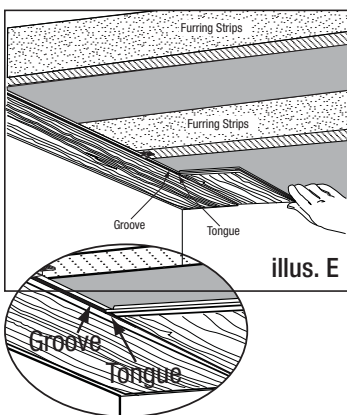

illus. E


Install Remaining Planks

1. Seams from row to row should be staggered. Cut some length from the first plank of the second row to stagger the seams from row to row. Keeping the 1/2-in and 3/4-in gaps at the ends.
2. Start the second row by inserting the tongue into the groove of the piece in the first row. (illus. E)
3. Measure the distance to the wall, and cut the last row of planks to fit. Cut off the groove side. Insert the tongue of the last row into groove of previous row. Run 1 screw per plank into the plank at

the furring strip location. **OPTION:** You can drive three finishing nails per plank into the wall directly under the face of the plank to hold in place. Molding will complete the installation.

Install Molding

1. Choose molding wide enough to cover the expansion gap and any plank edge.
2. Paint or stain decorative molding before installing.



illus. F


3. Install molding at the joint between the ceiling and walls. Nail to the wall. Do not nail into the WoodHaven plank.
4. Nail molding into the wall studs at least every 24-in. (illus. F)

WoodHaven™ Ceilings Panels Ten (10) Year Limited Warranty

For additional information on installing ceilings, including special installation tips and videos, please visit our website at ceilings.com or call customer service at 1-877-ARMSTRONG (276-7876).

CAUTION: Wood Dust. Sawing, sanding and machining wood products can produce dust. Airborne wood dust can cause respiratory, eye and skin irritation. The International Agency for Research on Cancer (IARC) has classified wood dust as a nasal carcinogen in humans.

Planks can also be installed horizontally. When installing horizontally, you will use the WoodHaven™ clips enclosed in the WoodHaven carton. With the long tongue edge of the first plank resting on the lath, you place the clip over the flange at a stud location. Using #6 x 1-1/4-in drywall screws sold separately (do not use the enclosed screws, they are too short for this application), secure the clip to a wall stud. Fasten clips at every stud location along the plank being installed. (illus. H)



For wainscoting, apply a baseboard of your choice over the bottom of the planks covering the lath and the bottom of the planks. A top trim of your choice can be installed at the top of the planks to serve as a chair rail and finish the installation.

Maintenance Recommendation:
Clean with a damp cloth.

illus. H

If you have ceiling questions, call: **1-877-ARMSTRONG (276-7876)**

Inspiring Great Spaces is a trademark of AFI Licensing LLC.

All other trademarks are property of AWI Licensing LLC or affiliates, or their respective owners.

©2017 AWI Licensing LLC.

Printed in the United States of America

ceilings.com

Armstrong®
CEILING