


May 19, 2006
No. 2143

Armstrong S-288 Residential Flooring Adhesive

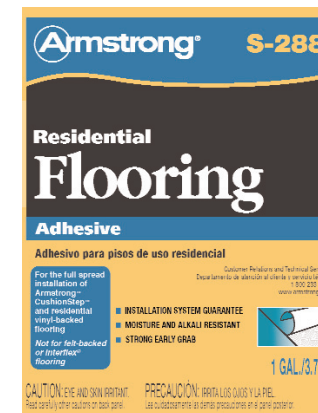

Armstrong is proud to introduce S-288 Residential Flooring Adhesive. Designed for use with Armstrong™ CushionStep™ flooring and Armstrong residential vinyl-backed flooring, this adhesive is a versatile choice for your customers. Its strong grab and superior moisture and alkali resistance allow for confident installation over both porous and nonporous surfaces.

One of the more impressive features of S-288 is the pressure sensitive formulation which eliminates buckling commonly encountered with modified loose lay or loose lay installation of fiberglass reinforced flooring.

Your customer can confidently use S-288 over a variety of flooring materials such as concrete, wood substrates, trowelable underlayments, terrazzo, S-194 Patch, Underlayment and Embossing Leveler and existing resilient flooring on all grades as recommended. S-288 cannot be used with felt-backed or Interflex® flooring.

S-288, positioned under the Armstrong brand, is available in 1-quart/946 mL (12/ctn.), 1-gallon/3.78 L (4/ctn.) and 4-gallon/15.14 L (single container) sizes.



ALL TOGETHER BETTER.

• QUICK HIT Selling Points

- o This product is marketed under the Armstrong brand for use with Armstrong CushionStep™ flooring and residential vinyl-backed flooring
- o S-288 utilizes a special pressure sensitive formulation which eliminates buckling that can commonly occur with modified loose lay or loose lay installation of fiberglass reinforced flooring
- o Its high bond strength over all porous and nonporous surfaces makes it an excellent choice in most vinyl-backed flooring applications (sheet and tile)
- o The strong initial grab reduces product shifting in set-in-wet applications
- o Superior moisture and alkali resistance allows for installation on all grade levels of concrete
- o Excellent trowelability makes it easy to use
- o Armstrong Guaranteed Installation System provides system warranty protection when used with Armstrong recommended flooring applications
- o Full Lifetime Adhesive Bond Warranty provides straightforward and complete warranty protection
- o Spread rate coverage = 250-300 ft.2/gal.
- o Available in 1-quart (12/ctn.), 1-gallon (4/ctn.) and 4-gallon (single container) sizes.

• The Armstrong Difference

When you choose an Armstrong™ adhesive, you can be sure that you're using a high quality product that will perform great and is made to last.

- o **Brand** – S-288 Residential Flooring Adhesive is marketed under the Armstrong brand for use with Armstrong CushionStep™ flooring and residential vinyl-backed flooring
- o **Service** – Available at specialty retailers in the United States and Canada
- o **Providing Value to our Customers** (for all installers)
 - A strong adhesive choice that provides flexibility and ease of use saving installation time and expense
 - A versatile choice for any installer providing the ability to install over a wide range of subfloors
 - A product you can trust – Lifetime Adhesive Bond Warranty when used with the Armstrong Guaranteed Installation System

• Product Ordering Information

Item Number	
FP00288124	S-288 Residential Flooring Adhesive – 1 quart - English/Spanish
FP00288408	S-288 Residential Flooring Adhesive – 1 gallon - English/Spanish
FP00288418	S-288 Residential Flooring Adhesive – 4 gallon - English/Spanish
FPS-288600	S-288 Residential Flooring Adhesive – 946 mL - English/ French
FPS-288601	S-288 Residential Flooring Adhesive – 3.78 L - English/ French
FPS-288605	S-288 Residential Flooring Adhesive – 15 L - English/ French

• Installation Information

For Use With: Full-spread installation of Armstrong™ CushionStep™ and residential vinyl-backed flooring. Do not use with felt-backed or Interflex® flooring.

Spread Rate: 250-300 ft.2 per gallon.

Bonds To: Concrete, trowelable underlayments, wood substrates, terrazzo, S-194 Patch, Underlayment & Embossing Leveler and existing resilient flooring on all grades as recommended.

Clean Up: Remove wet adhesive residue, with a clean, white cloth dampened with neutral detergent and water. Use mineral spirits for dried adhesive residue, carefully following warnings on container.

- Freeze-thaw stable to 10°F (-12°C). Avoid low temperatures or multiple freeze-thaw cycles.
- Shelf life is one year if not opened.
- VOC content: 14 g/L; calculate & reported, SCAQMD 1168

• Launch Tools & Tactics

In addition to this PnP, product specification sheets are available providing detailed product information that can be used by contractors, retailers, and installers. Each specification sheet provides technical product information and installation guidelines as well as material safety data (MSDS) information.