
AXIOM® Trim for Drywall and AcoustiBuilt® Ceiling Systems

One-piece or Two-piece
straight & curved

SUSTAIN™
High Performance
Sustainable
Ceiling Systems



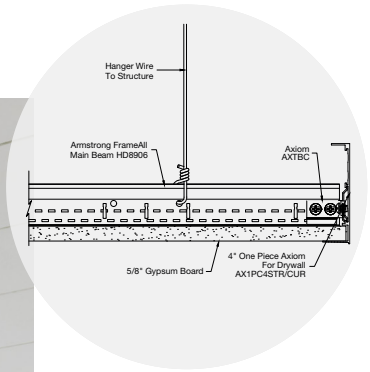

CAD/Revit® drawings at:
armstrongceilings.com/cadrevit

Axiom® Trim for Drywall and AcoustiBuilt® Ceiling Systems

This pre-engineered vertical trim solution for 5/8" drywall and AcoustiBuilt® ceiling systems eliminates vertical framing and provides architectural detail.

KEY SELECTION ATTRIBUTES

- 2-1/2", 4", 6", 8", 10", and 12" profile heights, available in both straight and curved
- Pre-engineered compatibility with 5/8" drywall and AcoustiBuilt ceiling systems
- Dynamic and Vertical curving capabilities
- Available in White, Blizzard White, and Unfinished for field painting
- Integrated and pre-punched taping flange for drywall attachment
- Axiom® trim is part of the Sustain™ portfolio and meets the most stringent industry sustainability compliance standards today
- CleanAssure™ family of products – includes disinfectable panels, suspension systems, and trim

COLORS Due to printing limitations, shade may vary from actual product.

Standard



White (WH)

Blizzard White (ZW)

Unfinished (UF)

Custom Colors Available*

* Custom colors will require purchase and approval of COLORCHIP found on specialty grid price list.

For Premium and Custom requests contact Axiom Quote, AxiomQuote@armstrong.com

AXIOM® Trim for Drywall and AcoustiBuilt® Ceiling Systems

One-piece or Two-piece straight & curved

SUSTAIN™ High Performance Sustainable Ceiling Systems

Declare.

RECYCLED CONTENT UP TO 50%

LEED V5 Ecomedes Data

COMMON MATERIALS FRAMEWORK


Human Health	Declare Label	Climate Health	EPD
	HPD	Ecosystem Health	EPD
	3rd Party CDPH	Circular Economy	✓

VISUAL SELECTION

AXIOM One-Piece Trim for Drywall

	Item No.◆	Description	Dimensions (Inches)	Unit of Measure	INCLUDED ACCESSORIES AXTBC	AXSPLICE2	AX2HGC	Factory Miter Minimum
Straight	**AX1PC2STR_ _**	2-1/2" One-Piece Trim for Drywall – Straight	120 × 1-1/8 × 2-1/2"	Pc.	8	1	-	25°
	AX1PC4STR_ _	4" One-Piece Trim for Drywall – Straight	120 × 1-1/8 × 4"	Pc.	8	2	-	25°
	AX1PC6STR_ _	6" One-Piece Trim for Drywall – Straight	120 × 1-1/8 × 6"	Pc.	8	2	-	25°
	AX1PC8STR_ _	8" One-Piece Trim for Drywall – Straight	120 × 1-1/8 × 8"	Pc.	8	2	-	25°
	AX1PC10STR_ _	10" One-Piece Trim for Drywall – Straight	120 × 1-1/8 × 10"	Pc.	10	3	2	40°
	AX1PC12STR_ _	12" One-Piece Trim for Drywall – Straight	120 × 1-1/8 × 12"	Pc.	10	4	2	40°

	Item No.◆	Description	Dimensions (Inches)	Unit of Measure	INCLUDED ACCESSORIES AXTBC	AXSPLICE2	AX2HGC	MINIMUM BEND RADIUS* Inside	Outside
Curved	**AX1PC2CUR_ _**	2-1/2" One-Piece Trim for Drywall – Curved	Vary × 1-1/8 × 2 -1/2"	Ln. Ft.	8	1	-	24"	24"
	AX1PC4CUR_ _	4" One-Piece Trim for Drywall – Curved	Vary × 1-1/8 × 4"	Ln. Ft.	8	2	-	24"	24"
	AX1PC6CUR_ _	6" One-Piece Trim for Drywall – Curved	Vary × 1-1/8 × 6"	Ln. Ft.	8	2	-	24"	24"
new	**AX1PC8CUR_ _**	8" One-Piece Trim for Drywall – Curved	Vary × 1-1/8 × 8"	Ln. Ft.	8	2	-	60"	60"
new	**AX1PC10CUR_ _**	10" One-Piece Trim for Drywall – Curved	Vary × 1-1/8 × 10"	Ln. Ft.	10	3	2	60"	60"
new	**AX1PC12CUR_ _**	12" One-Piece Trim for Drywall – Curved	Vary × 1-1/8 × 12"	Ln. Ft.	10	4	2	60"	60"



One-Piece Trim for Drywall

Taping flange pre-punched for drywall/ Acoustibuilt attachment.

AXIOM DYNAMIC CURVING CAPABILITIES

Axiom® Dynamic Curving is a manufacturing capability that enables straight and curved to be produced on a single, continuous piece of trim (single orientation only). This industry-first capability maximizes material usage with full-length pieces and minimizes joints and visible seams.

† Refer to ProjectWorks for minimum bend radii specifications, as these may vary.




Minimum Bend Radius†

Inside	Outside
30"	30"

AXIOM VECTOR - VERTICAL CURVED





	Item No.◆	Description	Dimensions (Inches)	Unit of Measure	INCLUDED ACCESSORIES AXTBC	SPTSPLICE	AX2HGC	MINIMUM BEND RADIUS*† Hills	Valleys
Vertical Curved	**AX1PC2CURSFV_ _**	2" Vertical Curved Trim for Drywall and AcoustiBuilt	Vary × 1-1/8 × 2-1/2"	Ln. Ft.	Vary	1	-	270"	270"
	AX1PC4CURSFV_ _	4" Vertical Curved Trim for Drywall and AcoustiBuilt	Vary × 1-1/8 × 4"	Ln. Ft.	Vary	2	-	270"	270"
	AX1PC6CURSFV_ _	6" Vertical Curved Trim for Drywall and AcoustiBuilt	Vary × 1-1/8 × 6"	Ln. Ft.	Vary	2	-	270"	270"

◆ When specifying or ordering items with the standard color finish add the two-letter suffix to the end of the item number for face paint options. (e.g. 2-1/2" One Piece Trim for Drywall - Straight Blizzard White - AX1PC2STR Z W))

* Bend will vary depending on ceiling type. Refer to install instructions for more information

† Refer to ProjectWorks for minimum bend radii specifications, as these may vary

TechLine 877 276-7876
armstrong.com/axiomdrywall

Armstrong® World Industries

AXIOM® Trim for Drywall and AcoustiBuilt® Ceiling Systems

One-piece or Two-piece
straight & curved

SUSTAIN™ High Performance Sustainable Ceiling Systems

Declare.

RECYCLED CONTENT
UP TO 50%

LEED V5
Ecomedes Data

COMMON MATERIALS FRAMEWORK

Human Health	Declare Label HPD 3rd Party CDPH	Climate Health	EPD
		Ecosystem Health	EPD
		Circular Economy	✓

TRIM & TRANSITIONS – Standard


AXIOM Bottom Trim for Drywall/Acoustibuilt® Ceiling Systems
(used with AXIOM Classic)

	Item No.◆		Dimensions (Inches)	Unit of Measure	INCLUDED ACCESSORIES AXTBC	AXSPLICE2	AX2HGC	Factory Miter Minimum
Straight	**AXBTSTR_ _**	Bottom Trim for Drywall – Straight	120 × 7/8 × 1-1/8"	Pc.	-	-	-	40°
	AXBTASTR_ _	Bottom Trim for AcoustiBuilt ceiling systems – Straight	120 × 1-1/16 × 1-1/18"	Pc.	-	-	-	40°


	Item No.◆		Dimensions (Inches)	Unit of Measure	INCLUDED ACCESSORIES AXTBC	AXSPLICE2	AX2HGC	MINIMUM BEND RADIUS* Inside	Outside
Curved	**AXBTCUR_ _**	Bottom Trim for Drywall – Curved	Vary × 7/8 × 1-1/8"	Ln. Ft.	-	-	-	24"	24"
	AXBTACUR_ _	Bottom Trim for AcoustiBuilt ceiling systems – Curved	Vary × 1-1/16 × 1-1/18"	Ln. Ft.	-	-	-	24"	24"

◆ When specifying or ordering items with the standard color finish add the two-letter suffix to the end of the item number for face paint options. (e.g. 2-1/2" One Piece Trim for Drywall - Straight Blizzard White - AX1PC2STR Z W)
* Bend will vary depending on ceiling type. Refer to install instructions for more information.

Bottom Trim for Drywall



Bottom Trim for AcoustiBuilt Ceiling Systems







Bottom Trims for Drywall/AcoustiBuilt: Taping flange pre-punched for drywall/AcoustiBuilt attachment.

INCLUDED ACCESSORIES

Item No.	Description	
AXSPLICE2	Splice Plate with Setscrews	
AXTBC	T-Bar Connection Clip	
AX2HGC*	Axiom Hanging Grid Clip with 2 holes	

*Only included with 10" and 12" Straight Vector Perimeter Trim

OPTIONAL ACCESSORIES

Item No.	Description	
AXTBCSS	T-Bar Connection Clip Stainless Steel version for non-ferrous applications	
AX-V-TBC**	T-Bar Clip for Vector® panel	
7239***	Adjustable Trim Clip	
AXSPLICE	Axiom Splice with Screws	
AXSPLICESS	Axiom Splice with Screws Stainless Steel version for non-ferrous applications	
AX2HGCSS	Axiom Hanging Grip Clip with 2 holes Stainless Steel version for non-ferrous applications	
SPTSPLICE	Serpentina Splice (only required for Axiom Vertical Curving)	
AXSPTHDC	Axiom-Serpentina Hold-Down Clip	
AX4SPLICEB	Axiom Splice Plate with Tabs	

** AX-V-TBC can be ordered in lieu of AXTBC when necessary, see section details below for examples
*** For use with specialty ceilings with grid offset larger than 3/8".

AXIOM® Trim for Drywall and AcoustiBuilt® Ceiling Systems

One-piece or Two-piece
straight & curved

SUSTAIN™
High Performance
Sustainable Ceiling Systems

Declare.


RECYCLED CONTENT
UP TO 50%

LEED V5
Ecomedes Data


COMMON MATERIALS FRAMEWORK

Human Health	Declare Label	Climate Health	EPD
	HPD	Ecosystem Health	EPD
	3rd Party CDPH	Circular Economy	✓


DETAILS Additional section details and CAD drawings available on armstrong.com/axiom

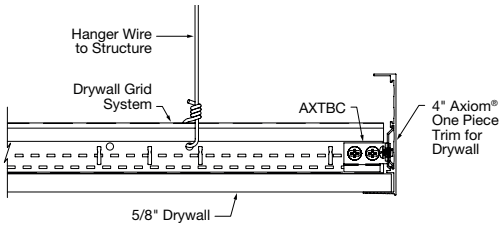


One-Piece Trim for Drywall

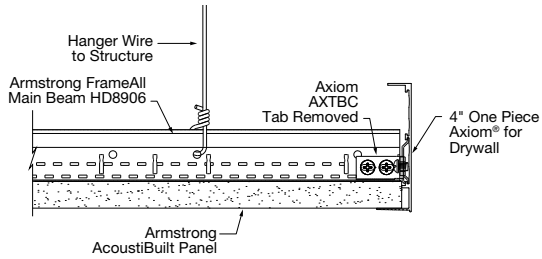

One-Piece Trim for Drywall
Installed with AcoustiBuilt

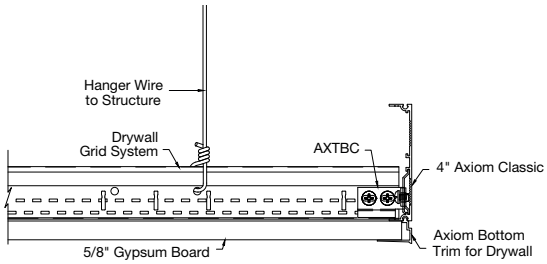

Two-Piece Bottom Trim for Drywall

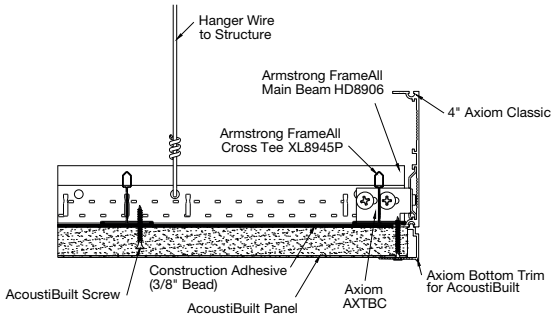

Two-Piece Bottom Trim for AcoustiBuilt

PHYSICAL DATA

Material
Commercial quality extruded 6063 aluminum alloy

Surface Finish
Factory-applied baked polyester paint finish

Cleaning & Disinfecting
Cleaning and CDC-approved disinfecting options available on armstrong.com/cleaning

Warranty
10-year limited warranty
30-year system warranty

Design Considerations
Physical product samples for standard and custom colors are available upon request. Please refer to the physical product sample prior to making a final selection. While we strive to ensure exact color matches, various factors such as differences in materials, texture, substrate porosity, painting processes, lighting, and observer subjectivity can all affect how paint colors appear on ceiling and wall panels, suspension systems, and trim products. Due to these and other differences, ceiling and wall panels, trim products, and suspension systems with the same color name will coordinate but may not be an exact color match. Product is dye-lotted. Order sufficient initial quantities and attic stock to minimize possible color variation.

All acoustical grid and Axiom trim accessories (a.k.a. clips) are supplied as unpainted items. Exposed clips will need to be field painted after installation, if required for the project. This ensures accessories meet the tested performance criteria and adhere to AWI installation instructions and warrantied products or systems.

Additional Design Considerations
Colors that are pre-qualified to meet Sustain portfolio requirements are available upon request. Other made-to-order colors must be evaluated if sustainability criteria is required. Lead time will increase.

Profile
Six Standard Profile heights with 3/4" horizontal flange and integrated taping flange

Cross Tee/Main Beam Interface
Flush Fit

End Detail
Splice with screws

ICC Reports
For areas under ICC jurisdiction, see evaluation report numbers ESR-1289 and ESR-1308 for allowable values and/or conditions of use concerning the suspension system components listed on this page. The reports are subject to reexamination, revisions, and possible cancellation.

TechLine / 1 877 276-7876
armstrong.com/axiomdrywall

BPCS-4659-926

LEED® is a registered trademark of the U.S. Green Building Council; Declare® and Living Building Challenge® (LBC) are registered trademarks of the International Living Future Institute®; WELL™ and WELL Building Standard are trademarks of the International WELL Building Institute; all other trademarks used herein are the property of AWI Licensing LLC and/or its affiliates © 2026 AWI Licensing LLC

Armstrong® World Industries