AXIOM® Indirect Light Ledge

Trim

straight & curved

SUSTAIN™
High Performance
Sustainable
Ceiling Systems



Axiom Indirect Light Ledge

Axiom® Indirect Light Ledge offers a low profile light cove with predictable lighting performance which easily integrates with a 5/8" drywall board.

KEY SELECTION ATTRIBUTES

- Axiom Indirect Light Ledge offers prefabricated "out-of-the-box" solutions delivering predictable integration between lighting and drywall ceiling systems
- Combining Axiom Indirect Light Ledge with FrameAll® Drywall Grid provides flexibility in both design and installation, achieving coves of varying size and application
- Designed with alignment grooves that accept the Axiom Light Fixture Alignment Clip (ALFAC) for use with Axis Cove Perfekt™ Lighting, and Vode® ZipWave ™ light fixtures. This ledge delivers aim free predictable performance in ceiling or wall lighting applications
- 10-Year Limited Warranty, 30-Year System Warranty
- Axiom Light Coves are part of the Sustain™ portfolio and meet the most stringent industry sustainability compliance standards today
- CleanAssure™ family of products – includes disinfectable panels, suspension systems, and trim

LIGHTING FIXTURES

Compatible with:
Most Standard Fixture Lighting
Axis Lighting and Vode Lighting*

*When used with the Axiom Light Fixture Alignment Clip (ALFAC)

axis

vode

COLOR

White (WH)

Custom Colors Available


For Premium and Custom requests contact Axiom Quote, AxiomQuote@armstrong.com

VISUAL SELECTION


	Item No.	Description	Length	INCLUDED ACCESSORIES AX4SPLICE
Axiom Indirect Light Ledge - Classic Profile	**AXILL2DSTR**	2" Classic for Drywall – Straight	120"	2
	AXILL2DCUR*	2" Classic for Drywall – Curved	Vary	2

* MINIMUM BEND RADIUS FOR INDIRECT LIGHT LEDGE
Inside: 60" minimum
Outside: 60" minimum

DETAILS



AXILL2DSTR
Classic Profile - Straight




AXILL2DCUR
Classic Profile - Curved


VISUAL SELECTION

	Item No.	Description	Dimensions	INCLUDED ACCESSORIES AX4SPLICE
Axiom Indirect Light Ledge - Corners for Classic Profile	**AXILL2DIC**	Classic Inside Corner	12" x 12"	2
	AXILL2DOC	Classic Outside Corner	12" x 12"	2

CORNER DETAILS



AXILL2DIC
Classic
Inside Corner



AXILL2DOC
Classic
Outside Corner

AXIOM® Indirect Light Ledge

Trim

straight & curved

SUSTAIN™ High Performance Sustainable Ceiling Systems

Declare.

RECYCLED CONTENT

UP TO 50%

LEED V5

Ecomedes Data

COMMON MATERIALS FRAMEWORK


Human Health	Declare Label	Climate Health	EPD
	HPD	Ecosystem Health	EPD
	3rd Party CDPH	Circular Economy	✓

VISUAL SELECTION


	Item No.	Description	Length	INCLUDED ACCESSORIES AX4SPLICE	AXCCLT45
Axiom® Indirect Light Ledge - Knife Edge® Profile	**AXILLKDSTR**	Knife Edge for Drywall – Straight	120"	2	5
	AXILLKDCUR*	Knife Edge for Drywall – Curved	Vary	2	5

* MINIMUM BEND RADIUS FOR INDIRECT LIGHT LEDGE
Inside: 60" minimum
Outside: 60" minimum

DETAILS



AXILLKDSTR
Knife Edge Profile – Straight




AXILLKDCUR
Knife Edge Profile – Curved


VISUAL SELECTION

	Item No.	Description	Length	INCLUDED ACCESSORIES AX4SPLICE
Axiom Indirect Light Ledge - Corners for Knife Edge® Profile	**AXILLKDIC**	Knife Edge Inside Corner	12" x 12"	2
	AXILLKDOC	Knife Edge Outside Corner	12" x 12"	2

CORNER DETAILS







AXILLKDIC
Knife Edge Inside Corner



AXILLKDOC
Knife Edge Outside Corner

ACCESSORIES

Item No.	Description	
AX4SPLICE	Axiom Splice Plate	
ALFAC	Axiom Light Fixture Alignment Clip For use with Axis and Vode Partner fixtures for alignment in both ceiling and wall applications	
15122OE	12' Knurled Angle Molding	
DW90C	90° Drywall Angle Clip	

AXIOM® Indirect Light Ledge

Trim

straight & curved

SUSTAIN™ High Performance Sustainable Ceiling Systems

Declare.

RECYCLED CONTENT

UP TO 50%

LEED V5


Ecomedes Data

COMMON MATERIALS FRAMEWORK

Human Health	Declare Label	Climate Health	EPD
	HPD	Ecosystem Health	EPD
	3rd Party CDPH	Circular Economy	✓

LIGHTING PARTNERS

axis CovePerfekt™

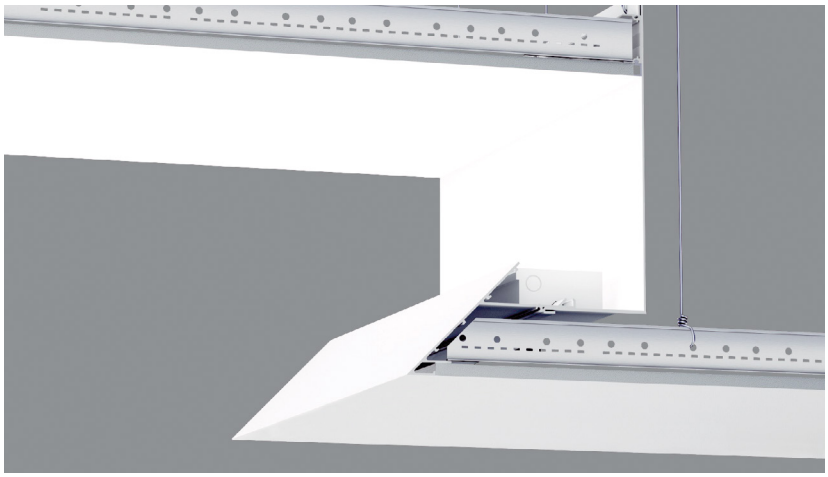


Outstanding Aesthetics
- No shadows. No bright spots. No color shifting.


Easy Specification
- Aim-free luminaire. No need for complex details. Less trade coordination.

Unparalleled Performance
- Twice the efficiency of other LED cove products.
- Wide distribution using SurroundLite™ technology

Worry-free Installation & Maintenance
- Foolproof keyed mounting. Up to 90% less labor.



Wall



Ceiling

For compatible lighting details, visit axislighting.com

TRIM & TRANSITIONS – Standard

AXIOM® Indirect Light Ledge

Trim

straight & curved

SUSTAIN™
High Performance
Sustainable Ceiling Systems

Declare.

RECYCLED CONTENT
UP TO
50%


LEED V5
Ecomedes Data

COMMON MATERIALS FRAMEWORK

Human Health	Declare Label	Climate Health	EPD
	HPD	Ecosystem Health	EPD
	3rd Party CDPH	Circular Economy	✓

LIGHTING PARTNERS

vode® ZipWave™ LED 707

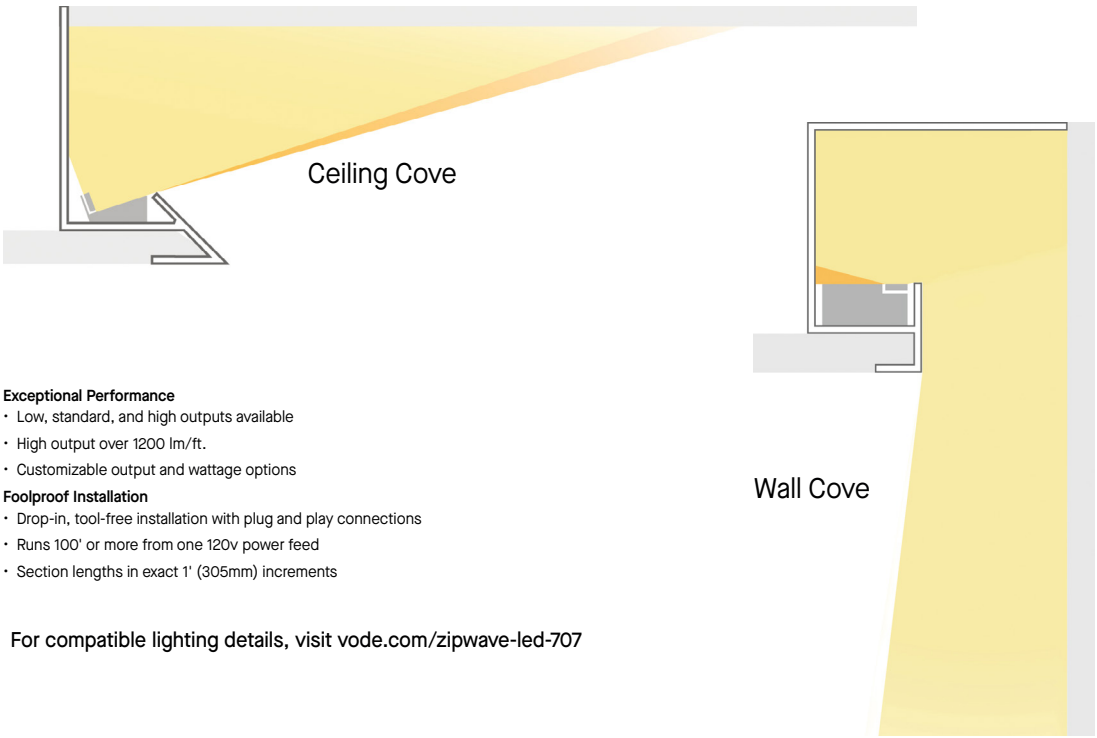

Exceptional Performance
- Low, standard, and high outputs available
- High output over 1200 lm/ft.
- Customizable output and wattage options

Foolproof Installation
- Drop-in, tool-free installation with plug and play connections
- Runs 100' or more from one 120v power feed
- Section lengths in exact 1' (305mm) increments

For compatible lighting details, visit vode.com/zipwave-led-707

PHYSICAL DATA

Material
Commercial quality 6063 aluminum alloy

Surface Finish
Factory-applied baked polyester paint finish

Cleaning & Disinfecting
Cleaning and CDC-approved disinfecting options available on armstrong.com/cleaning

Warranty
10-Year Limited Warranty; 30-Year System Warranty

Profile
Classic and Knife Edge profile options for Light Ledges to easily integrate with 5/8" drywall board.

Cross Tee/Main Beam Interface
Flush fit

End Detail
Splice with screws

Design Consideration for Ledges and Standard Light Fixtures
Recommended fixture weight is approximately 2 LBS/LFT.

LEED® is a registered trademark of the U.S. Green Building Council; Declare® and Living Building Challenge® (LBC) are registered trademarks of the International Living Future Institute®; WELL™ and WELL Building Standard are trademarks of the International WELL Building Institute; Axis, CovePerfekt™, and SurroundLite are trademarks of Axis Lighting; Vode® and ZipWave™ are trademarks of Vode Lighting LLC; all other trademarks used herein are the property of AWI Licensing LLC and/or its affiliates © 2026 AWI Licensing LLC

Armstrong® World Industries