
AXIOM® Vector

Curved Perimeter Trim

SUSTAIN™
High Performance
Sustainable
Ceiling Systems



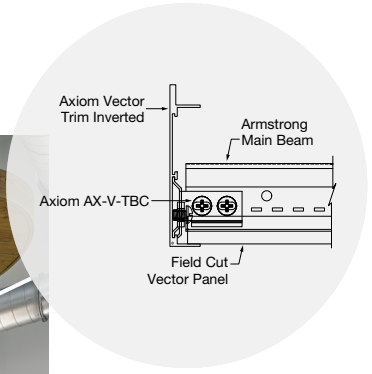

Axiom Vector trim



Axiom Vector Straight Perimeter Trim

When curving, Axiom Vector trim is typically inverted to easily conceal cut vector, tegular, or specialty ceiling panel edges.

KEY SELECTION ATTRIBUTES

- Extruded aluminum trim provides more crisp edge detailing compared to conventional roll-formed steel systems
- 6" or taller Axiom Vector Trim, along with the Adjustable Trim Clip (item 7239 purchased separately) allows for integration of Axiom® Vector with WoodWorks® and MetalWorks™ panels that drop greater than 3/8" below the grid flange. Reference installation instructions for requirements.
- Vertical curving capabilities
- Dynamic curving capabilities
- Factory precision mitering and cut-to-length requests available by special order as part of a ProjectWorks® package
- Axiom trim is part of the Sustain™ portfolio and meets the most stringent industry sustainability compliance standards today
- CleanAssure™ family of products – includes disinfectable panels, suspension systems, and trim (Cleaning and CDC-approved disinfecting options available on armstrongceilings.com/cleaning)
- Colors coordinate with Armstrong® ceiling and suspension system
- Compatible with Armstrong® exposed suspension systems

COLORS

Due to printing limitations, shade may vary from actual product.

Standard

White (WH) · Black (BL) · Silver Satin (SA) · Silver Grey (SG) · Gun Metal Grey (MY) · Blizzard White (ZW) · Charcoal Black (ZB)

Premium - MetalWorks™ Mesh Coordinating Colors

Copper (MCP) · Bronze (MBZ) · Nickel Chrome (NC)

Premium - MetalWorks™ Lume Coordinating Colors

Whitelume (WHA) · Silverlume (SIA) · Gun Metal (MYA)

Premium - Armstrong Suspension System Coordinating Colors

Ivory (IV) · Medium Taupe (MT) · Light Grey (LG) · Grey Stone (GS) · Stone (SE) · Basalt (SBT) · Riverstone (SRV) · Coffee (SCE) · Polar (SPO) · Limestone (SLM) · Fossil (SFL) · Sandstone (SSS) · Hay (SHY) · Oat (SOT)

Mist (SMT) · Pacific (SPC) · Rainstorm (SRS) · Lilac (SLC) · Twilight (STT) · Ocean (SOC) · Boxwood (SBW) · Fern (SFN) · Ivy (SIV) · Feldspar (SFS) · Topaz (STZ) · Bronzite (SBZ) · Honeysuckle (SHS) · Marigold (SMG) · Rose (SRO)

Premium - Wood-Look Finishes††

Cocoa Bean (WLCB) · Flax (WLFL) · Peppercorn (WLPC) · Sesame (WLSE) · Nutmeg (WLNM) · Macadamia (WLMA) · Ginger (WLGR) · Sea Salt (WLSS) · Cinnamon (WLCM)

Maple (MP) · Cherry (CH) · Dark Cherry (DC) · Walnut (WN) · Oak (OK) · Walnut Espresso (WE) · Coriander (WLCO) · Poppy Seed (WLPS) · Almond (WLAL)

† Coordinates with Effects™ wood-look finishes for MetalWorks Tegular, Vector, and Linear ceilings. For trim solutions for WoodWorks products, please see WoodWorks Trim and Accessories data sheet BPCS-5622.

†† Signed Axiom Wood-Look sample must be provided at time of order for straight and curved material.



Custom Colors Available*

* Custom colors will require purchase and approval of COLORCHIP found on specialty grid price list.

For Premium and Custom requests contact Axiom Quote, AxiomQuote@armstrong.com

TechLine 877 276-7876
armstrong.com/axiomvector

Armstrong® World Industries

TRIM & TRANSITIONS – Standard

AXIOM® Vector
Curved Perimeter Trim

SUSTAIN™ High Performance Sustainable Ceiling Systems

Declare.

RECYCLED CONTENT
UP TO 50%

LEED V5
Ecomedes Data

COMMON MATERIALS FRAMEWORK


Human Health	Declare Label	Climate Health	EPD
	HPD	Ecosystem Health	EPD
	3rd Party CDPH	Circular Economy	✓

Well Building Standard™ (WELL)
Living Building Challenge® (LBC)

VISUAL SELECTION


	Item No.◆	Description	Dimensions (Inches)	Unit of Measure	INCLUDED ACCESSORIES* AXTBC**	AXSPLICE2	AX2HGC	MINIMUM BEND RADIUS Inside	Outside
AXIOM® Vector Curved Perimeter Trim	**AX2VECUR _ _ _**	2" Curved Vector Perimeter Trim	Vary × 3/4 × 2-7/16"	Ln. Ft.	5	1	-	18"	18"
	AX4VECUR_ _ _	4" Curved Vector Perimeter Trim	Vary × 3/4 × 4"	Ln. Ft.	5	2	-	18"	18"
	AX6VECUR_ _ _	6" Curved Vector Perimeter Trim	Vary × 3/4 × 5-13/16"	Ln. Ft.	5	2	-	18"	18"
	AX8VECUR_ _ _	8" Curved Vector Perimeter Trim	Vary × 3/4 × 7-13/16"	Ln. Ft.	5	2	-	18"	18"
new	**AX10VECUR_ _ _**	10" Curved Vector Perimeter Trim	Vary × 3/4 × 10"	Ln. Ft.	5	2	2	18"	18"
new	**AX12VECUR_ _ _**	12" Curved Vector Perimeter Trim	Vary × 3/4 × 12"	Ln. Ft.	5	2	2	18"	18"

Axiom Vector Trim




Shown in Inverted position, typical for curved applications

AXIOM VECTOR - VERTICAL CURVED

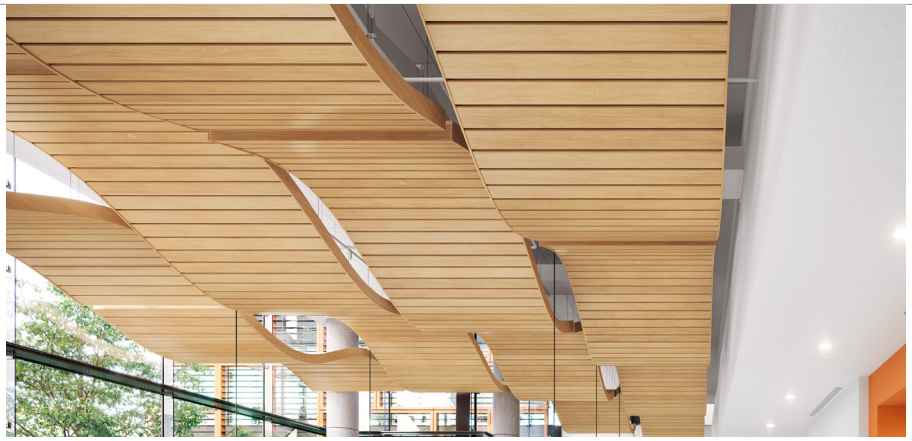

	Item No.◆	Description	Dimensions (Inches)	Unit of Measure	INCLUDED ACCESSORIES* AXTBC**	SPTSPLICE	AX2HGC	MINIMUM BEND RADIUS***† Hills	Valleys
AXIOM® Vector Vertical Curved	**AX2VECURSFV _ _ _**	2" Vertical Curved Inverted Vector Perimeter Trim	Vary × 3/4 × 2-7/16"	Ln. Ft.	5	1	-	270"	270"
	AX4VECURSFV _ _ _	4" Vertical Curved Inverted Vector Perimeter Trim	Vary × 3/4 × 4"	Ln. Ft.	5	2	-	270"'	270"
	AX6VECURSFV _ _ _	6" Vertical Curved Inverted Vector Perimeter Trim	Vary × 3/4 × 5-13/16"	Ln. Ft.	5	2	-	270"	270"



◆ When specifying or ordering items with the standard color finish add the two-letter suffix to the end of the item number for face paint options. For a 360-degree painted product, add a "3" in front of the two-letter paint suffix. (e.g. 2" Curved Axiom Vector Silver Grey {face paint} - AX2VECURS G; {360 painted} - AX2VECUR3 S G)
* Number of Included Accessories is subject to change based on material length
** AX-V-TBC can be ordered in lieu of AXTBC when necessary, see section details below for examples
*** Bend will vary depending on ceiling type. Refer to install instructions for more information
† Refer to ProjectWorks for minimum bend radii specifications, as these may vary

AXIOM® Vector
Curved Perimeter Trim

SUSTAIN™
High Performance
Sustainable Ceiling Systems

Declare.

RECYCLED CONTENT
UP TO 50%

LEED V5
Ecomedes Data

COMMON MATERIALS FRAMEWORK


Human Health	Declare Label	Climate Health	EPD
	HPD	Ecosystem Health	EPD
	3rd Party CDPH	Circular Economy	✓

Well Building Standard™ (WELL)
Living Building Challenge® (LBC)

AXIOM DYNAMIC CURVING CAPABILITIES

Axiom® Dynamic Curving is a manufacturing capability that enables straight and curved to be produced on a single, continuous piece of trim (single orientation only). This industry-first capability maximizes material usage with full-length pieces and minimizes joints and visible seams.


*Refer to ProjectWorks for minimum bend radii specifications, as these may vary.

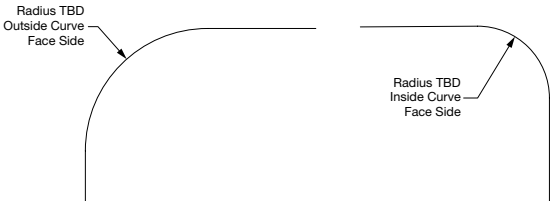

Minimum Bend Radius*



Inside	Outside
24"	24"

INCLUDED ACCESSORIES

Item No.	Description	
AXSPLICE2	Splice Plate with Setscrews	
AXTBC	T-Bar Connection Clip	
AX2HGC*	Axiom Hanging Grid Clip with 2 holes	
SPTSPLICE†	Serpentina Splice	

* Only included with 10" and 12" Axiom Vector Curved Perimeter Trim
† Only required for Axiom Vertical Curved Items

OPTIONAL ACCESSORIES

Item No.	Description	
AXTBCSS	T-Bar Connection Clip Stainless Steel version for non-ferrous applications	
AX-V-TBC**	T-Bar Clip for Vector® panel	
7239***	Adjustable Trim Clip	
AXSPLICE	Axiom Splice with Screws	
AXSPLICESS	Axiom Splice with Screws Stainless Steel version for non-ferrous applications	
AX2HGCSS	Axiom Hanging Grip Clip with 2 holes Stainless Steel version for non-ferrous applications	
AXSPTHDC	Axiom-Serpentina Hold-Down Clip	
AX4SPLICEB	Axiom Splice Plate with Tabs	

** AX-V-TBC can be ordered in lieu of AXTBC when necessary, see section details below for examples
*** For use with specialty ceilings with grid offset larger than 3/8"

AXIOM® Vector

Curved Perimeter Trim

SUSTAIN™
High Performance
Sustainable Ceiling Systems

Declare.

RECYCLED CONTENT
UP TO
50%


LEED V5
Ecomedes Data

COMMON MATERIALS FRAMEWORK


Human Health	Declare Label	Climate Health	EPD
	HPD	Ecosystem Health	EPD
	3rd Party CDPH	Circular Economy	✓

Well Building Standard™ (WELL)
Living Building Challenge® (LBC)

SECTION DETAILS Additional section details and CAD drawings available on armstrong.com/axiom

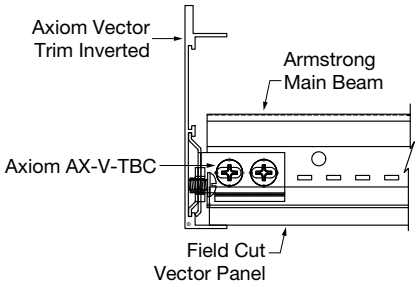

Cut Vector Panel with Inverted
Axiom Perimeter Trim

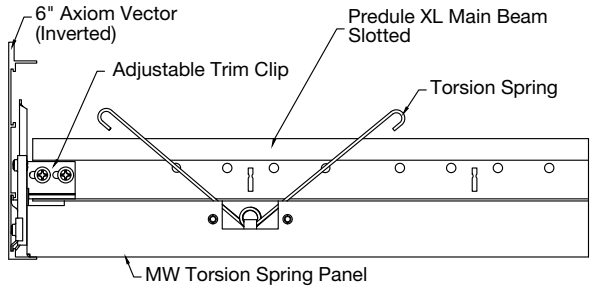

Cut Tegular Panel with Inverted
Axiom Vector Perimeter Trim

PHYSICAL DATA

Material
Commercial quality 6063 aluminum alloy

Cleaning & Disinfecting
Cleaning and CDC approved disinfecting options available on armstrong.com/cleaning

Design Considerations
Physical product samples for standard and custom colors are available upon request. Please refer to the physical product sample prior to making a final selection. While we strive to ensure exact color matches, various factors such as differences in materials, texture, substrate porosity, painting processes, lighting, and observer subjectivity can all affect how paint colors appear on ceiling and wall panels, suspension systems, and trim products. Due to these and other differences, ceiling and wall panels, trim products, and suspension systems with the same color name will coordinate but may not be an exact color match. Product is dye-lotted. Order sufficient initial quantities and attic stock to minimize possible color variation.

All acoustical grid and Axiom trim accessories (a.k.a. clips) are supplied as unpainted items. Exposed clips will need to be field painted after installation, if required for the project. This ensures accessories meet the tested performance criteria and adhere to AWI installation instructions and warrantied products or systems.

Additional Design Considerations
Colors that are pre-qualified to meet Sustain portfolio requirements are available upon request. Other made-to-order colors must be evaluated if sustainability criteria is required. Lead time will increase.

Warranty
10-Year Limited Warranty; 30-Year System Warranty

Profile
Six standard height profiles available with 3/4" horizontal flange(s)

Cross Tee/Main Beam Interface
Flush fit

End Detail
Splice with screws

TechLine / 877 276-7876
armstrong.com/axiomvector

BPCS-6929-926

LEED® is a registered trademark of the U.S. Green Building Council; Declare® and Living Building Challenge® (LBC) are registered trademarks of the International Living Future Institute®; WELL™ and WELL Building Standard are trademarks of the International WELL Building Institute; all other trademarks used herein are the property of AWI Licensing LLC and/or its affiliates © 2026 AWI Licensing LLC

Armstrong®
World Industries