# 3form Elements – Clario

## Acoustic Ceiling Panel



3form Elements – Clario ceiling panels in Ebony

**Visually-stunning, highly-functional ceiling panels made from sound-absorbing Sola Felt™.**

### KEY SELECTION ATTRIBUTES

- Made using sustainable, high-performance Sola Felt™ with 50% post-consumer recycled PET
- NRC rating of 0.70
- Easy-to-install panels that work with a variety of ceiling systems
- Available in 22 standard colors
- Choose from 2 sizes to fill any ceiling


TechLine 877 276-7876
armstrong.com/3formelements


Armstrong® World Industries | 3form


# 3form Elements – Clario


## Acoustic Ceiling Panel


**SOLA FELT™ COLORS** Due to dye lot variations, shade may vary from actual product.



Zinc (FZN)



Nickel (FNI)


Platinum (FPL)


Armor (FAR)



Steel (FSL)


Cast (FCA)



Dune (FDN)



Driftwood (FDW)



Silt (FSI)



Mineral (FML)



Ebony (FBN)


Nightfall (FNF)



Admiral (FAD)



Dusk (FDK)



Steelblue (FSB)



Emerald (FEM)



Mustard (FMU)


Citrine (FCR)


Ochre (FOC)


Aries (FAS)


Saffron (FSF)


Jasper (FJP)



TechLine 877 276-7876
armstrong.com/3formelements

Armstrong® World Industries | 3form

# 3form Elements – Clario

## Acoustic Ceiling Panel

### VISUAL SELECTION

### PERFORMANCE


Dots represent high level of performance.

### ACOUSTICAL INFORMATION

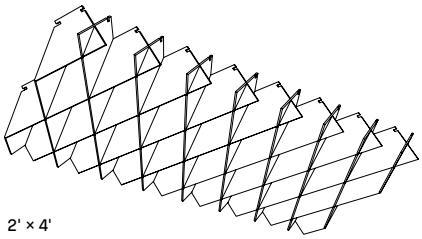
| | Item No. ◆ | Nominal Dimension (W × L) | Fire Rating | Certified Low VOC Emissions | NRC |
|---|---|---|---|---|---|
| CLARIO CEILING PANELS | **BPAS1S01_ _ _** | 24" × 24" | Class A | • | 0.70 |
| | **BPAS1S02_ _ _** | 24" × 48" | Class A | • | 0.70 |

◆ When specifying or ordering, include the appropriate 3-digit color suffix (e.g. BPAS1S01D11 F M L). For custom sizes, shapes, or colors, contact ASQuote@armstrong.com.

### SYSTEM INSTALLATION DETAILS



2' × 2'



2' × 4'

| | Item No. | Description | Quantity |
|---|---|---|---|
| Suspension Systems | **7301_ _ _** † | Prelude® XL® 15/16" 12' HD Main Beam | 20 PCS/CTN |
| | **XL7342_ _ _** † | Prelude 4' Cross Tee | 60 PCS/CTN |
| | **XL7328_ _ _** † | Prelude 2' Cross Tee | 60 PCS/CTN |
| Wall-to-Wall | **7800_ _ _** † | 12' Hemmed Angle Molding | 30 PCS/CTN |
| Floating Cloud Installations | **AX_ _STR_ _ _ _** † | Axiom® Classic Straight Perimeter Trim | Per piece |

† 15/16" Prelude XL Suspension System and Axiom trim available in coordinating colors. For the appropriate 3-digit color suffix, please visit armstrong.com/preludexl and armstrong.com/axiom

### PHYSICAL DATA

**Material**
3/16" thick (4.5 mm) non-woven layered and formed polyester felt (PET) fiber panels with color throughout.

**Fire Performance**
Flame Spread Index 0-25. Smoke Developed Index 450 or less. Class A per ASTM E84.

CAN/ULC S102 surface burning characteristics. Flame Spread Index of 40 or less and Smoke Developed Index of 225 or less.

Contact local code official for plenum code considerations related to sprinkler placement.

**Application Considerations**
Panel color and texture may vary from order to order; adequate attic stock should be ordered. Due to the nature of recycled materials, small dark fibers may be visible on light panels.

Clario panels should not be installed near sources of heat greater than 158° F.

**Acoustical Performance**
Tested per ASTM C423 and mounted in accordance with ASTM E795. Sound absorption of 0.70 NRC. Contact TechLine for details at techline@armstrong.com.

**VOC Emissions**
Third-party certified compliant with California Department of Public Health CDPH/EHLB/Standard Method Version 1.2, 2017. This standard is the guideline for low emissions in LEED®, WELL Building Standard®, Living Building Challenge® (LBC), CalGreen Title 24, ANSI/ASHRAE/USGBC/IES Standard 189; ANSI/GBI Green Building Assessment Protocol.

**Installation Considerations**
Once removed from the shipping packaging, carefully expand the panels until they achieve their intended dimensional, waffle-like appearance. Finalize the installation by inserting the slotted ends of the panels securely into the existing ceiling system grid.

**Lead Times**
4 week lead time (not including transit). All lead times are approximate and dependent upon current supply chains.

**Cleaning and Disinfecting**
Sola Felt should be cleaned regularly by vacuuming or using a soft brush to prevent dirt buildup and weathering; slight fiber shedding is normal. For liquid stains, promptly blot with a damp cloth or mild detergent, avoiding strong solvents, abrasives, or soaking the material. See installation instructions for complete cleaning guidelines.

**Warranty**
3form 2-year Limited Warranty

**Weight; Pieces/Carton**
1.60 LBS/panel
Ordered by the carton:
BPAS1S01 – 24" × 24" 4 panels/CTN
BPAS1S02 – 24" × 48" 2 panels/CTN

3FORM® ELEMENTS

TechLine / 877 276-7876
armstrong.com/3formelements

BPCS-7533-726

LEED® is a registered trademark of the U.S. Green Building Council; Declare® and Living Building Challenge® (LBC) are registered trademarks of the International Living Future Institute®; WELL™ and WELL Building Standard® are trademarks of the International WELL Building Institute; all other trademarks used herein are the property of AWI Licensing LLC and/or its affiliates © 2026 AWI Licensing LLC

Armstrong® World Industries