CALLA®

Vector®
smooth texture

SUSTAIN®
High Performance
Sustainable
Ceiling Systems

CAD/Revit® drawings at:
armstrong.com/cadrevit

DESIGNFlex®
A New World of Choice
for Ceiling Systems



Calla Vector panels with Prelude 15/16" suspension system

plus capabilities to do more



armstrong.com/capabilities
See more photos at:
armstrong.com/photogallery

Smooth, drywall-like finish with a 1/4" reveal and downward accessibility; ideal for projects where plenum space is limited.

KEY SELECTION ATTRIBUTES

- DesignFlex® options include made-to-order sizes and colors available to ship in 3 weeks
- Smoothest mineral fiber panel available
- Calla® Vector® panels are part of the Sustain® portfolio, and meet the most stringent industry sustainability compliance standards today
- 1/4" reveal resulting in a monolithic appearance
- Vector Trim Kit in Blizzard White finish for easy installation and bright visual
- CleanAssure™ family of products – includes disinfectable panels, suspension systems, and trim
- Mold- and mildew-resistant surface
- Washable, Scratch-resistant, Soil-resistant
- Excellent sound absorption – NRC 0.80
- Downward accessible for minimal plenum height
- USDA-Certified Biobased Product – 91%
- Product can be recycled through the Armstrong Ceilings Recycling Program
- Made in the U.S.A. of domestic and global content
- Build America, Buy America (BABA) Act compliant
- 30-Year Limited System Warranty against visible sag, mold, and mildew
- Available with factory-cut holes for USAI® trimless downlight fixture integration

COLORS


Due to printing limitations, shade may vary from actual product.




White (WH)

Available in any color!

These colors are pre-qualified to meet Sustain® portfolio requirements.

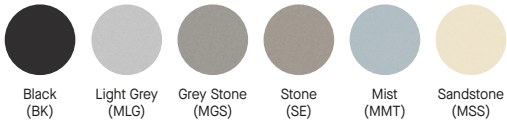


Black (BK) | Light Grey (MLG) | Grey Stone (MGS) | Stone (SE) | Mist (MMT) | Sandstone (MSS)

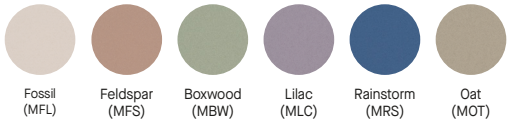

Fossil (MFL) | Feldspar (MFS) | Boxwood (MBW) | Lilac (MLC) | Rainstorm (MRS) | Oat (MOT)

Other made-to-order colors must be evaluated if sustainability criteria is required. Lead time will increase.

DETAILS



1. Calla Vector
2. Calla Vector with Prelude® 15/16" suspension system

TechLine 877 276-7876
armstrong.com/calla

Armstrong®
World Industries

CALLA®

Vector®
smooth texture

USDA CERTIFIED BIOBASED PRODUCT
PRODUCT 91%

SUSTAIN®
High Performance
Sustainable Ceiling Systems

Declare.

RECYCLED CONTENT
UP TO 76%


LEED V5
Ecomedes Data

COMMON MATERIALS FRAMEWORK

Human Health	Declare Label	Climate Health	EPD
	HPD	Ecosystem Health	EPD
	3rd Party CDPH	Circular Economy	✓
OCCUPANT EXPERIENCE		Acoustics	✓

VISUAL SELECTION

armstrong.com/suspdwgs	Susp. Dwg.	Item No.	Dimensions (Inches)
CALLA®	73	**2814**	24 × 24 × 1"
1/4" Reveal with 15/16" Vector		**2815**	24 × 48 × 1"



Made-to-Order Sizes

1 Ctn Min
FASTSIZE
3 WEEKS
order to ship

Visit the product page online and see "Configure an Item" to verify capabilities. Questions? email Techline@armstrong.com

1" Thick – 15/16" Vector

Width (short side)	Length (long side)
4" – 24"	9" – 48"

PERFORMANCE SELECTION

Dots represent high level of performance. $$$$

armstrong.com/suspdwgs	UL Classified Acoustics NRC	+ CAC =	Total Acoustics[1]	Fire Performance	Light Reflect*	Bio-Block Anti-Mold/ Mildew	Humi-Guard+ Sag Resistant	Certified Low VOC Emissions	CleanAssure™ Disinfectable Panels Fog	DURABILITY Wash*	Scratch*	Soil	Recycle Program	30-Yr Warranty
CALLA®	0.80 •	33	N/A	Class A	0.85 •	•	•	•	•	•	•	•	•	•
1/4" Reveal with 15/16" Vector	0.80 •	33	N/A	Class A	0.85 •	•	•	•	•	•	•	•	•	•
1" Thick – 15/16" Vector	N/A	N/A	N/A	Class A	0.85 •	•	•	•	•	•	•	•	•	•

[1] Total Acoustics® ceiling panels have an ideal combination of sound absorption and sound blocking in one product.
GOOD (NRC 0.60-0.65; CAC 35+) **BETTER** (NRC 0.70-0.75; CAC 35+) **BEST** (NRC 0.80+; CAC 35+)
* Advertised values for light reflectance, wash- and scratch-resistance are applicable to white tiles only

VECTOR TRIM KITS

Item No.	Color	Length	Substrate	Pcs/Ctn
VETK4ZW	Blizzard White	4"	Steel	24
VETK6ZW	Blizzard White	6"	Steel	24
VETK24ZW	Blizzard White	24"	Steel	24
VETK48ZW	Blizzard White	48"	Steel	24
VETK96ZW	Blizzard White	96"	Steel	24

Made-to-Order Sizes & Colors

4-6
WEEKS
order to ship


Length
4" – 96"

ACCESSORIES (must be ordered separately)

Item No.			Pcs/Ctn
442		Hold-down Clip for Vector® panels (for all installations)	50
443		Border Clip for Calla® Vector® panels	50
7425		24" Stabilizer Bar	100
7445		48" Stabilizer Bar	100
7870		Spring Border Clip (For installations with the panel resting on the wall molding)	1,000

SUSPENSION SYSTEM

15/16"



Prelude® XL®

PHYSICAL DATA

Material
Wet-formed mineral fiber with an acoustically transparent membrane

Surface Finish
Acoustically transparent membrane with factory-applied latex paint

Fire Performance
Class A: ASTM E84 and CAN/ULC S102 surface burning characteristics. Flame Spread Index of 25 or less. Smoke Developed Index of 50 or less (UL® labeled).

ASTM E1264 Classification
Type A, Form A2.2, Pattern G; Fire Class A

Humidity/Sag Resistance
HumiGuard® Plus ceiling panels are recommended for areas subject to high humidity, up to, but not including, standing water and outdoor applications.

Anti-Mold/Mildew
Ceiling tiles with BioBlock® performance resist the growth of mold and mildew on the tile surface.

VOC Emissions
Third-party certified compliant with California Department of Public Health CDPH/EHLB/Standard Method Version 1.2, 2017. This standard is the guideline for low emissions in LEED®, WELL Building Standard™, Living Building Challenge® (LBC), CalGreen Title 24, ANSI/ASHRAE/USGBC/IES Standard 189; ANSI/GBI Green Building Assessment Protocol.

Design Considerations
Physical product samples for standard and custom colors are available upon request. Please refer to the physical product sample prior to making a final selection. While we strive to ensure exact color matches, various factors such as differences in materials, texture, substrate porosity, painting processes, lighting, and observer subjectivity can all affect how paint colors appear on ceiling and wall panels, suspension systems, and trim products.

Due to these and other differences, ceiling and wall panels, trim products, and suspension systems with the same color name will coordinate but may not be an exact color match. Product is dye-lotted. Order sufficient initial quantities and attic stock to minimize possible color variation.

Acoustical Performance
CAC testing conducted using Prelude® suspension system.

High Recycled Content
Contains greater than 50% total recycled content. Total recycled content based on product composition of post-consumer and pre-consumer (post-industrial) recycled content per FTC guidelines.

Insulation Value
R Factor – 2.9 (BTU units); R Factor – 0.445 (Watts units)

Cleaning and Disinfecting
Cleaning and CDC-recommended disinfecting options available on armstrong.com/cleaning

30-Year Performance Guarantee & Warranty
When installed with Armstrong® Suspension System. Details at armstrong.com/warranty

Weight; Square Feet/Carton
2814 – 1.0 LBS/SF; 40 SF/CTN
2815 – 1.0 LBS/SF; 48 SF/CTN

Minimum Order Quantity
1 carton

MINERAL FIBER – Standard

TechLine / 877 276-7876
armstrong.com/calla

BPCS-5676-1026

LEED® is a trademark of the U.S. Green Building Council; Declare® and Living Building Challenge® (LBC) are registered trademarks of the International Living Future Institute®; WELL™ and Well Building Standard are trademarks of the International WELL Building Institute; UL is a registered trademark of UL LLC; USAI Lighting is a trademark of USAI Lighting, LLC; Revit® is a registered trademark of Autodesk, Inc.; all other trademarks used herein are the property of AWI Licensing LLC and/or its affiliates © 2026 AWI Licensing LLC

Armstrong® World Industries