ULTIMA® Shapes for DESIGNFLEX®

Tegular
fine texture

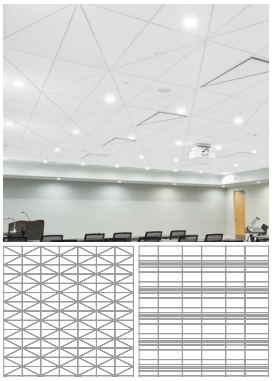
SUSTAIN®
High Performance
Sustainable
Ceiling Systems



DESIGNFLEX®
Ceiling Systems

Shapes Sizes Colors

Personalize your design at:
armstrong.com/designflex



Ultima® Shapes panels with Suprafine® XM 9/16" suspension system

Fine-textured ceiling panels available in shapes and made-to-order sizes with Sustain® performance. Available to ship in 3 weeks.

KEY SELECTION ATTRIBUTES


- DesignFlex® options include shapes and made-to-order sizes available to ship in 3 weeks
- Mix and match – Shapes also available in Calla®, Lyra®, Optima®, MetalWorks™, and WoodWorks® panels
- Ultima® panels are part of the Sustain® portfolio and meet the most stringent industry sustainability compliance standards today
- CleanAssure™ family of products – includes disinfectable panels, suspension systems, and trim
- Mold- and mildew-resistant surface
- Light reflectance – 0.88
- Lighting and MEP integration with TechZone® or with shaped lights and diffusers available through one of our partner companies or with standard modular and pendant lights
- Washable, Scratch-resistant, Soil-resistant
- Product can be recycled through the Armstrong Ceilings Recycling Program
- Made in the U.S.A. of domestic and global content
- Build America, Buy America (BABA) Act compliant
- 10-Year Limited System Warranty against visible sag, mold, and mildew

COLOR

White
(WH)

DETAILS





1. Ultima® Shapes Tegular
2. Ultima® Shapes Tegular with Suprafine® XM 9/16" suspension system

TechLine 877 276-7876
armstrong.com/ultimashapes

Armstrong®
World Industries

ULTIMA® Shapes for DESIGNFLEX®

Tegular
fine texture

USDA CERTIFIED BIOBASED PRODUCT
PRODUCT 95%

SUSTAIN®
High Performance
Sustainable Ceiling Systems

Declare.

RECYCLED CONTENT
UP TO 87%


LEED V5
Ecomedes Data

COMMON MATERIALS FRAMEWORK

Human Health	Declare Label	Climate Health	EPD
	HPD	Ecosystem Health	EPD
	3rd Party CDPH	Circular Economy	✓
OCCUPANT EXPERIENCE		Acoustics	✓

Start your design process with a visit to our online pattern gallery at: armstrong.com/patterngallery


See dozens of pre-designed patterns and colors online in our pattern gallery. We've provided all of the details – from takeoffs showing 2' or 4' on-center spacing to panels, suspension, trims, and accessories. Installation instructions answer questions typically associated with unique ceiling installations. Lighting and air diffusers can also be easily integrated. If you can't find the ceiling pattern you envision for your next space online, call us and we'll help you create a design to personalize your space – 877 276-7876.








These 7 Ultima® Shapes with Beveled Tegular edges are available with Suprafine® XM 9/16" suspension:


45° SHAPES

Triangles	Item No.	Description/ Dimensions (Inches)	NRC	CAC
2' Main Beam Spacing 	100300	Triangle 24 × 48 × 3/4"	0.70 •	31
Right Triangles – 2' Main Beam Spacing 	100307	Right Triangle 24 × 24 × 3/4"	0.70 •	N/A

60° SHAPES


Triangles	Item No.	Description/ Dimensions (Inches)	NRC	CAC
2' Main Beam Spacing 	100301	Triangle 24 × 24 × 3/4"	0.70 •	N/A
Right Triangles – 2' Main Beam Spacing 	100305	Right Triangle – Left 24 × 48 × 3/4"	0.70 •	N/A
	100306	Right Triangle – Right 24 × 48 × 3/4"	0.70 •	N/A

75° SHAPES

Triangles	Item No.	Description/ Dimensions (Inches)	NRC	CAC
2' Main Beam Spacing 	100303	Triangle 24 × 12 × 3/4"	0.70 •	N/A
4' Main Beam Spacing 	100304	Triangle 48 × 24 × 3/4"	0.70 •	N/A

MORE ITEMS ▶

SUSPENSION SYSTEMS

9/16" 

Suprafine® XM for Shapes

PARTNER COMPANIES

For more information on our partner companies, please visit armstrong.com/partners

Compatible with: Axis Geometrix™ Lighting, JLC-Tech T-BAR FLEX LED Lights and Price diffusers.

Shaped infill panels are available for applicable lighting fixtures. Add L I N F to the end of any Shape panel item number to order. Metal diffuser infills are available from the diffuser manufacturer.

PHYSICAL DATA

Material
Wet-formed mineral fiber with DuraBrite® acoustically transparent membrane

Surface Finish
DuraBrite® scrim with factory-applied latex paint

Fire Performance
Class A: ASTM E84 and CAN/ULC S102 surface burning characteristics. Flame Spread Index 25 or less. Smoke Developed Index 50 or less (UL labeled).

ASTM E1264 Classification
Type A, Form A2.2, Pattern E; Fire Class A

Humidity/Sag Resistance
HumiGuard® Plus ceiling panels are recommended for areas subject to high humidity, up to, but not including, standing water and outdoor applications.

Anti-Mold/Mildew
Ceiling tiles with BioBlock® performance resist the growth of mold and mildew on the tile surface.

VOC Emissions
Third-party certified compliant with California Department of Public Health CDPH/EHLB/Standard Method Version 1.2, 2017. This standard is the guideline for low emissions in LEED®, WELL Building Standard™, Living Building Challenge® (LBC), CalGreen Title 24, ANSI/ ASHRAE/USGBC/IES Standard 189; ANSI/GBI Green Building Assessment Protocol

High Recycled Content
Classified as containing greater than 50% total recycled content. Total recycled content based on product composition of post-consumer and pre-consumer (post-industrial) recycled content per FTC guidelines.

Seismic Restraint
Suprafine® XM for Shapes suspension systems have been engineered, tested, and approved for use with DesignFlex® Shapes panels for application in all seismic areas when installed per Armstrong® Ceilings installation instructions. For more details, visit armstrong.com/shapesinstallation

Insulation Value
R Factor – 2.2 (BTU units)
R Factor – 0.39 (Watts units)

Cleaning and Disinfecting
Cleaning and CDC recommended disinfecting options available on armstrong.com/cleaning

10-Year Performance Guarantee & Warranty
When installed with Armstrong® Suspension System. Details at armstrong.com/warranty

Weight; Pieces/Carton
100303 – 0.97 lbs/pc; 24 pcs/ctn
100301 – 1.94 lbs/pc; 12 pcs/ctn
100307 – 1.94 lbs/pc; 24 pcs/ctn
100300, 100304, 100305, 100306, – 3.88 lbs/pc; 12 pcs/ctn

Minimum Order Quantity
1 carton

TechLine 877 276-7876
armstrong.com/ultimashapes

Armstrong® World Industries

ULTIMA® Shapes for DESIGNFLEX®

Tegular
fine texture

USDA CERTIFIED BIOBASED PRODUCT
PRODUCT 95%

SUSTAIN®
High Performance
Sustainable Ceiling Systems

Declare.

RECYCLED CONTENT
UP TO
87%

LEED V5
Ecomedes Data

COMMON MATERIALS FRAMEWORK

Human Health	Declare Label	Climate Health	EPD
	HPD	Ecosystem Health	EPD
	3rd Party CDPH	Circular Economy	✓
OCCUPANT EXPERIENCE		Acoustics	✓

PANEL OPTIONS (shown in finish view from below ceiling)

These 6 Ultima® Shapes with Beveled Tegular edges are available with Suprafine® XM 9/16" suspension:

45° SHAPES

Parallelograms

No Parallelograms available in 45° shapes

Trapezoids

No Trapezoids available in 45° shapes

60° SHAPES

Parallelograms	Item No.	Description/ Dimensions (Inches)	NRC	CAC
2' Main Beam Spacing	100313	Right Parallelogram 24 × 24 × 3/4"	0.70 •	31
	100314	Left Parallelogram 24 × 24 × 3/4"	0.70 •	31

Trapezoids

2' Main Beam Spacing	100309	Trapezoid 24 × 48 × 3/4"	0.70 •	31

75° SHAPES

Parallelograms	Item No.	Description/ Dimensions (Inches)	NRC	CAC
2' Main Beam Spacing	100315	Right Parallelogram 24 × 12 × 3/4"	0.70 •	N/A
	100316	Left Parallelogram 24 × 12 × 3/4"	0.70 •	N/A


Trapezoids

2' Main Beam Spacing	100310	Trapezoid 24 × 12 × 3/4"	0.70 •	31

[1] Total Acoustics® ceiling panels have an ideal combination of sound absorption and sound blocking in one product.
GOOD (NRC 0.60-0.65; CAC 35+) **BETTER** (NRC 0.70-0.75; CAC 35+) **BEST** (NRC 0.80+; CAC 35+)

SUSPENSION SYSTEMS

9/16"



Suprafine® XM for Shapes

PARTNER COMPANIES

For more information on our partner companies, please visit armstrong.com/partners

Compatible with:
Axis Geometrix™ Lighting, JLC-Tech T-BAR FLEX LED Lights and Price diffusers.

Shaped infill panels are available for applicable lighting fixtures. Add L I N F to the end of any Shape panel item number to order. Metal diffuser infills are available from the diffuser manufacturer.

PHYSICAL DATA

Material
Wet-formed mineral fiber with DuraBrite® acoustically transparent membrane

Surface Finish
DuraBrite® scrim with factory-applied latex paint

Fire Performance
Class A: ASTM E84 and CAN/ULC S102 surface burning characteristics. Flame Spread Index 25 or less. Smoke Developed Index 50 or less (UL labeled).

ASTM E1264 Classification
Type A, Form A2.2, Pattern E; Fire Class A

Humidity/Sag Resistance
HumiGuard® Plus ceiling panels are recommended for areas subject to high humidity, up to, but not including, standing water and outdoor applications.

Anti-Mold/Mildew
Ceiling tiles with BioBlock® performance resist the growth of mold and mildew on the tile surface.

VOC Emissions
Third-party certified compliant with California Department of Public Health CDPH/EHLB/Standard Method Version 1.2, 2017. This standard is the guideline for low emissions in LEED®, WELL Building Standard™, Living Building Challenge® (LBC), CalGreen Title 24, ANSI/ ASHRAE/USGBC/IES Standard 189; ANSI/GBI Green Building Assessment Protocol

High Recycled Content
Classified as containing greater than 50% total recycled content. Total recycled content based on product composition of post-consumer and pre-consumer (post-industrial) recycled content per FTC guidelines.

Seismic Restraint
Suprafine® XM for Shapes suspension systems have been engineered, tested, and approved for use with DesignFlex® Shapes panels for application in all seismic areas when installed per Armstrong® Ceilings installation instructions. For more details, visit armstrong.com/shapesinstallation

Insulation Value
R Factor – 2.2 (BTU units)
R Factor – 0.39 (Watts units)

10-Year Performance Guarantee & Warranty
When installed with Armstrong® Suspension System. Details at armstrong.com/warranty

Cleaning and Disinfecting
Cleaning and CDC recommended disinfecting options available on armstrong.com/cleaning

Weight; Pieces/Carton
100315, 100316 – 1.94 lbs/pc; 24 pcs/ctn
100310 – 2.91 lbs/pc; 12 pcs/ctn
100313, 100314 – 3.88 lbs/pc; 12 pcs/ctn
100309 – 5.82 lbs/pc; 8 pcs/ctn

Minimum Order Quantity
1 carton

TechLine / 877 276-7876
armstrong.com/ultimashapes

BPCS-5807-826

JLC Tech is a trademark of JLC TECH LLC; LEED® is a registered trademark of the U.S. Green Building Council; Declare® and Living Building Challenge® (LBC) are registered trademarks of the International Living Future Institute®; WELL™ and WELL Building Standard™ are trademarks of the International WELL Building Institute; Price® is a registered trademark of Price Industries Limited; Geometrix™ and Axis are owned by Axis Lighting; UL is a trademark of UL LLC; all other trademarks used herein are the property of AWI Licensing LLC and/or its affiliates © 2026 AWI Licensing LLC

Armstrong® World Industries

DESIGNFLEX® SHAPES

DESIGNFLEX® Suspension Systems & Accessories

Optima® PB Shapes & Ultima® Shapes panels

USDA CERTIFIED BIOBASED PRODUCT PRODUCT 95%

SUSTAIN® High Performance Sustainable Ceiling Systems

Declare.

RECYCLED CONTENT

UP TO 87%

LEED V5

Ecomedes Data

COMMON MATERIALS FRAMEWORK

Human Health	Declare Label	Climate Health	EPD
	HPD	Ecosystem Health	EPD
	3rd Party CDPH	Circular Economy	✓
OCCUPANT EXPERIENCE		Acoustics	✓

SUSPENSION SYSTEMS COMPONENTS & ACCESSORIES

System utilizes Suprafine® XL® main beams

45° SHAPES

Item No.		Description
75AB45L		Suprafine® 45° Left Angle Bracket
75AB45R		Suprafine® 45° Right Angle Bracket
75AB45D		Suprafine® 45° Double Angle Bracket
75CB45		Suprafine® 45° Corner Bracket
XM754524		Suprafine® 45° Base Cross Tee – 24" Main Beam Spacing
XM754548		Suprafine® 45° Base Cross Tee – 48" Main Beam Spacing
XM7524		Suprafine® Perimeter Cross Tee – 24" Main Beam Spacing
XM7548		Suprafine® Perimeter Cross Tee – 48" Main Beam Spacing
PCC		Axiom® Perimeter Corner Clip
PAC		Perimeter Angle Clip

60° SHAPES

Item No.		Description
75AB60L		Suprafine® 60° Left Angle Bracket
75AB60R		Suprafine® 60° Right Angle Bracket
75AB60D		Suprafine® 60° Double Angle Bracket
75CB60L		Suprafine® 60° Corner Bracket – Left
75CB60R		Suprafine® 60° Corner Bracket – Right
XM756024		Suprafine® 60° Base Cross Tee – 24" Main Beam Spacing
XM756048		Suprafine® 60° Base Cross Tee – 48" Main Beam Spacing
XM7524		Suprafine® Perimeter Cross Tee – 24" Main Beam Spacing
XM7548		Suprafine® Perimeter Cross Tee – 48" Main Beam Spacing
PCC		Axiom® Perimeter Corner Clip
PAC		Perimeter Angle Clip


75° SHAPES

Item No.		Description
75AB75L		Suprafine® 75° Left Angle Bracket
75AB75R		Suprafine® 75° Right Angle Bracket
75AB75D		Suprafine® 75° Double Angle Bracket
XM757524		Suprafine® 75° Base Cross Tee – 24" Main Beam Spacing
XM757548		Suprafine® 75° Base Cross Tee – 48" Main Beam Spacing
XM7524		Suprafine® Perimeter Cross Tee – 24" Main Beam Spacing
XM7548		Suprafine® Perimeter Cross Tee – 48" Main Beam Spacing
PCC		Axiom® Perimeter Corner Clip
PAC		Perimeter Angle Clip

For additional suspension components, trims, and clips, please consult the full installation instructions at armstrong.com/shapesinstallation

SUSPENSION SYSTEMS

9/16"



Suprafine® XM for Shapes

PARTNER COMPANIES

For more information on our partner companies, please visit armstrong.com/partners

Compatible with: Axis Geometrix™ Lighting, JLC-Tech T-BAR FLEX LED Lights and Price diffusers.

Shaped infill panels are available for applicable lighting fixtures. Add L I N F to the end of any Shape panel item number to order. Metal diffuser infills are available from the diffuser manufacturer.