WOODWORKS® ACGI Linear System

Open Series 2



WoodWorks® ACGI Linear Open Series 2 in a custom stain; California Business School Center, San Diego, CA

Individual plank system features a 3/4" reveal with a factory-installed felt strip for up to 0.80 NRC.

KEY SELECTION ATTRIBUTES

- Durable thermally fused laminate finishes are available via ASQuote@armstrong.com
- Installs progressively with black linear clips (LSC-105) on Armstrong® Prelude® XL® grid
- Veneer planks available in lengths up to 8'
- Planks are typically 3/4" thick with a standard 3/4" reveal (optional 1/2")
- Factory-installed exterior black bug screen (scrim) reveal offers visual concealment of the plenum
- Planks are butted end-to-end using alignment clips (LSC-106) resulting in a more continuous appearance along the ceiling
- The series is completely accessible by removing two adjacent planks
- Access panels or doors are optional in areas where frequent access above the ceiling is required
- FSC® Certified wood is available (FSC-C007626); Contact ASQuote@armstrong.com
- Build America, Buy America (BABA) capable; Contact your sales rep for additional information

WOODWORKS® ACGI Linear System

Open Series 2

FINISH RANGES Due to printing limitations, shade may vary from actual product.


The carefully curated species and veneer cuts offer a beautiful natural variation. The images here reflect the visual range that is likely within our product.
Darkest to lightest tones may occur within an installation due to the character of wood.



Plain Slice White Maple (NWM)



Plain Slice White Ash (NWA)



Vertical Grain Fir (NVF)



Rift White Oak (NRO)



Plain Slice White Oak (NOK)



Plain Slice Cherry (NPC)



Quartered Mahogany (NQM)



Quartered Sapele (NQS)



Quartered Walnut (NQW)



Plain Slice Walnut (NWN)

CUSTOM FINISHES



Custom Wood
Species and Finishes
Available

WOODWORKS® – Custom

TechLine 877 276-7876
armstrong.com/woodworksacgi

Armstrong® World Industries

WOODWORKS® ACGI Linear System

Open Series 2

THERMALLY FUSED LAMINATE FINISHES

Due to printing limitations, shade may vary from actual product.

Wilsonart®

Wilsonart® Thermally Fused Laminate (TFL) finishes offer more consistent wood visuals with less variation. TFL wood-look finishes are ideal for high-traffic, expansive spaces.



Raw Chestnut (7975)

Manitoba Maple (7911)


Norwegian Ash (8241)


Natural Rift (7954)


Pasadena Oak (7986)


Tan Echo (7941)


Castle Oak (7928)


Tuscan Walnut (7291)


Amber Cherry (7919)


Windsor Mahogany (7039)


Walnut Heights (7965)


River Cherry (7937)


Studio Teak (7960)


Valley Forge Elm (8231)


Anderson Cherry (8266)


Kingswood Walnut (8218)


Italian Silver Ash (8217)


Belair (8234)

CUSTOM FINISHES


Custom Wood Species and Finishes Available

NOTE: Additional Wilsonart® TFL finishes and coordinating with real wood veneers available via ASQuote.

WOODWORKS® – Custom

TechLine 877 276-7876
armstrong.com/woodworksacgi

Armstrong® World Industries

WOODWORKS® ACGI Linear System

Open Series 2

SPECIFICATION INFORMATION

Item No.	Suspension	Reveal	Solid Wood Width	Veneer Width	Typical Thickness
L02-###-C	Side Clip	1/2" or 3/4"	Up to 5-1/2"	Up to 6"	3/4"

HOW TO SPEC IT

Series: **L02** — Thickness: **375** — Width: **C**


L02-375-C

What It Means: Linear Open Series 2, 3-3/4" wide plank and 3/4" thick.


THICKNESS REFERENCE*

A	1/2"
B	5/8"
C	3/4"
D	7/8"
E	1"
F	1-1/8"
G	1-1/4"
H	1-3/8"
I	1-1/2"
J	1-5/8"
K	1-3/4"
L	1-7/8"
M	2"
N	2-1/8"
O	2-1/4"
P	2-3/8"


* TFL finishes are available in 3/4" thickness only.

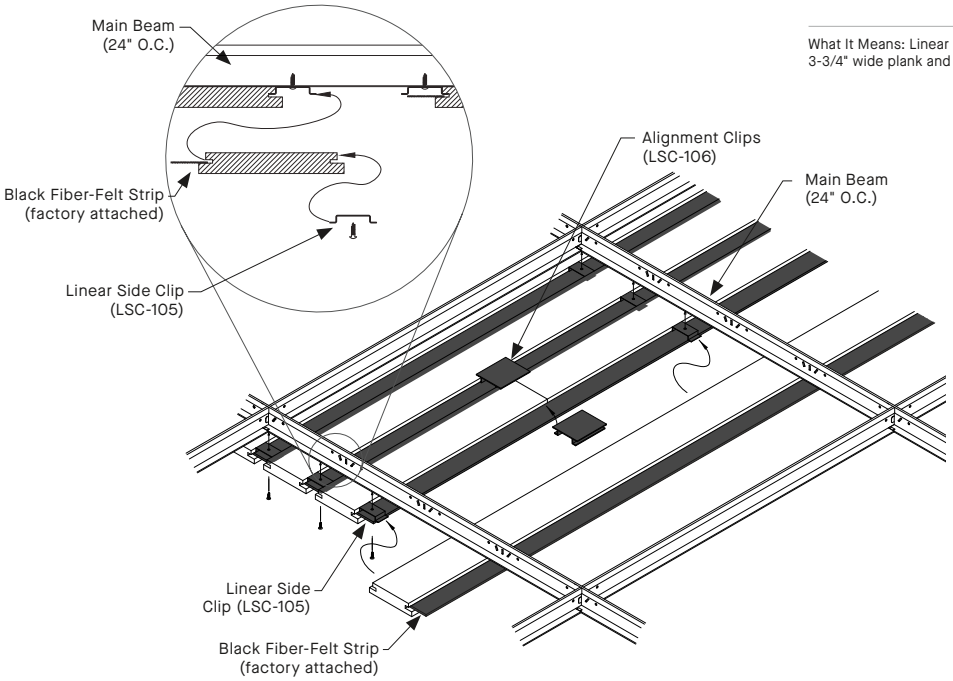

1 End View

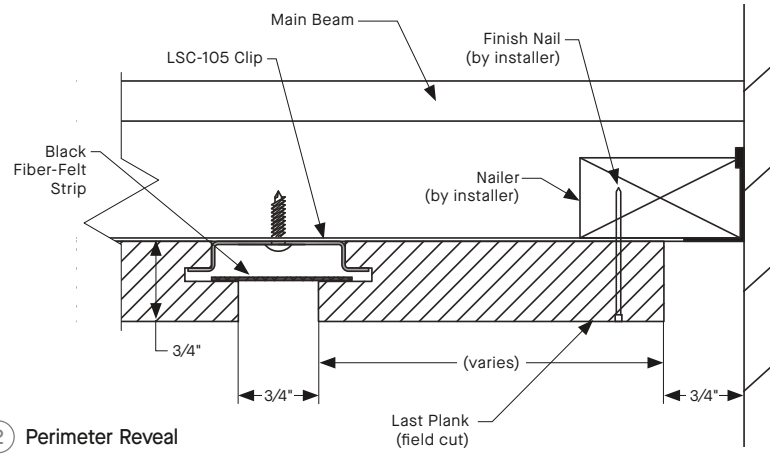

2 Perimeter Reveal

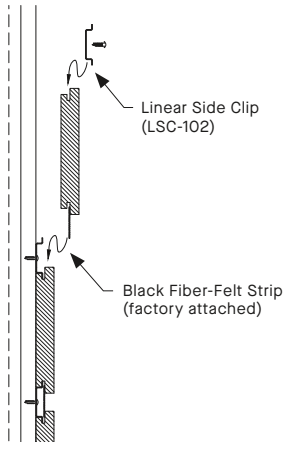

3 Wall Application

PHYSICAL DATA

Material
Fire-rated particle board (FRPB) with real wood veneers. Vertical Grain Fir (NVF) is FRPB with a reconstituted veneer. Thermally fused laminate (TFL) is double-sided FRPB.

Fire Performance
Solid Wood – Class C: ASTM E84 surface burning characteristics. Class B available with fire rated treatment.

Veneer Wood (Non-Perforated) – Class A: ASTM E84 surface burning characteristics.

Thermally Fused Laminate – Class A: ASTM E84 surface burning characteristics. Flame Spread Index 25 or less. Smoke Developed Index 50 or less.

LEED® Credit
Depending upon product it may contribute to LEED credits. Contact us for more information.

Species and Stains
Linear Open Series 2 is available in a variety of veneer species and custom stains. Please see Wood Species + Stain Catalog.

For SUSTAIN®, Roseburg Medite® FRMDF available upon request via ASQuote@armstrong.com.

Delivery, Storage, and Handling (Interior Application Only)
Material must be stored and installed only in secured ambient environment (humidity range 25%–55%, temperature not to exceed 86°F). All windows, doors, and wet-work must be complete before installation. Handle carefully to avoid damaging.

Warranty
Details at armstrong.com/warranty

TechLine / 877 276-7876
armstrong.com/woodworksacgi

BPCS-6760-726

Roseburg Medite® is a registered trademark of Roseburg Forest Products Co; FSC® is a registered trademark of Forest Stewardship Council®, A.C., license code FSC-C007626; LEED® is a registered trademark of the U.S. Green Building Council; Wilsonart® is a registered trademark of Wilsonart LLC; all other trademarks used herein are the property of AWI Licensing LLC and/or its affiliates © 2026 AWI Licensing LLC

Armstrong® World Industries