METALWORKS™ Blades – Classics

Linear Panels with Acoustical Options
smooth texture

SUSTAIN™
High Performance
Sustainable
Ceiling Systems


FAST 4 WEEKS or Less

FAST134
Select Items Ship Fast
armstrongceilings.com/fast134



MetalWorks Blades – Classics 2" × 6" panels in Effects Cherry

CAD/Revit® drawings at:
armstrongceilings.com/cadrevit

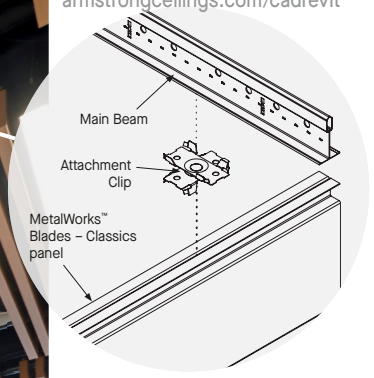

plus capabilities to do more



armstrongceilings.com/capabilities
See more photos at:
armstrongceilings.com/photogallery

Durable metal vertical panels in multiple sizes with swivel attachment clips that allow for design flexibility.

KEY SELECTION ATTRIBUTES

- new · Four new Sequels™ pre-coat, wood-look finishes are part of the FAST134 program
- new · MetalWorks™ FASTPeel™ panels feature an easier-to-remove protective film
- Now available in 17 Effects™ wood-look finishes
- Standard blade sizes in multiple lengths with either:
  - 4" depth and 1" width
  - 6" depth with 1" or 2" widths
- Premium blade sizes available:
  - Lengths up to 120"
  - Depths up to 10"
  - Widths 1" or 2"
- Available in 22-1/2", 46-1/2", 94-1/2", and 96" lengths for creative design layouts
- CleanAssure™ family of products – includes disinfectable panels, suspension systems, and trim
- Select products included in the FAST134 program – ready to ship in 4 weeks or less
- Blade panels available with either two factory-installed end caps, one end cap, or no end caps
- MetalWorks™ Blades – Classics panels are part of the Sustain™ portfolio (unperforated panels only)
- Create acoustical or non-acoustical upscale linear designs
- Fast, easy installation with standard Prelude® XL® 15/16" or 360° painted suspension systems
- Select finishes now standard with easier-to-remove FASTPeel™ protective film

END CAP DETAILS in Sequels Cape May Cherry



1. Factory-applied End Cap
2. Field-cut End Cap

TechLine 877 276-7876
armstrongceilings.com/metalworksbladesclassics

Armstrong® World Industries

METALWORKS™ Blades – Classics

Linear Panels with Acoustical Options
smooth texture

SUSTAIN®
High Performance
Sustainable Ceiling Systems

Declare.

RECYCLED CONTENT
UP TO 15%

LEED V5

COMMON MATERIALS FRAMEWORK		Climate Health	EPD
Human Health	Declare Label	Ecosystem Health	EPD
	HPD		
	3rd Party CDPH	Circular Economy	✓
OCCUPANT EXPERIENCE		Acoustics	✓



MetalWorks™ Blades - Classics in Sequels Cape May Cherry

STANDARD COLORS & FINISHES
Due to printing limitations, shade may vary from actual product.

Painted

Whitelume (WHA)


Silverlume (SIA)


Gun Metal (MYA)

Sequels™
Pre-coated Coil, Fast Lead Time


La Jolla Oak* (SQLO)


New Haven Walnut* (SQNW)


Cape May Cherry* (SQCC)



Montauk Driftwood* (SQMD)

Effects™ Classic
Dye-Sublimation


Effects Cherry (FXCH)


Effects Dark Cherry (FXDC)


Effects Oak (FXOK)


Effects Walnut (FXWN)


Effects Walnut Espresso (FXWE)

Effects™ Bold
Dye-Sublimation


Effects Sea Salt (FXSS)


Effects Ginger (FXGR)


Effects Nutmeg (FXNM)


Effects Poppy Seed (FXPS)


Effects Peppercorn (FXPC)


Effects Almond (FXAL)

Effects™ Subtle
Dye-Sublimation


Effects Sesame (FXSE)


Effects Macadamia (FXMA)


Effects Cinnamon (FXCM)


Effects Flax (FXFL)


Effects Cocoa Bean (FXCB)


Effects Coriander (FXCO)

*Not part of the Sustain™ portfolio

CUSTOM COLORS & FINISHES


Custom Colors Available*



Custom Wood-look Finishes Available

* Colors that are pre-qualified to meet Sustain portfolio requirements are available upon request. Other made-to-order colors must be evaluated if sustainability criteria is required. Lead time will increase. For more information, visit our website at armstrongceilings.com/metalworks or contact Architectural Specialties TechLine at 877 276-7876 for custom panel lengths.

For premium requests contact ASQuote, ASQuote@armstrongceilings.com

PERFORMATION OPTIONS
(1:2 scale shown)

M1 (Unperforated)


M15 (Rd 1612)

TechLine 877 276-7876
armstrongceilings.com/metalworksbladesclassics

Armstrong® World Industries

BLADES – Standard

METALWORKS™ Blades – Classics

Linear Panels with Acoustical Options

smooth texture

SUSTAIN® High Performance Sustainable Ceiling Systems

Declare.

RECYCLED CONTENT UP TO 15%

LEED V5

COMMON MATERIALS FRAMEWORK		
Human Health	Declare Label	Climate Health EPD
	HPD	Ecosystem Health EPD
	3rd Party CDPH	Circular Economy ✓
OCCUPANT EXPERIENCE		Acoustics ✓

BLADES – Standard

VISUAL SELECTION

PERFORMANCE Dots represent high level of performance.

	Item No.◆	Description/ Dimensions D × W × L (Inches) Custom Sizes Available		Fire Rating	CleanAssure™ Disinfectable Panels: Fog	Spray	Wipe	DURABILITY: Wash	Scrub
MetalWorks™ Blades – Classics	8157D41_ _ _ _ _ _ 8157D61_ _ _ _ _ _ 8157D62_ _ _ _ _ _	Vertical panel with caps on both ends 4 × 1 × 94-1/2" 6 × 1 × 94-1/2" 6 × 2 × 94-1/2"		Class A	•	•	•	•	•
	8156D41_ _ _ _ _ _ 8156D61_ _ _ _ _ _ 8156D62_ _ _ _ _ _	Vertical panel with caps on both ends 4 × 1 × 46-1/2" 6 × 1 × 46-1/2" 6 × 2 × 46-1/2"		Class A	•	•	•	•	•
	8155D41_ _ _ _ _ _ 8155D61_ _ _ _ _ _ 8155D62_ _ _ _ _ _	Vertical panel with caps on both ends 4 × 1 × 22-1/2" 6 × 1 × 22-1/2" 6 × 2 × 22-1/2"		Class A	•	•	•	•	•
	7202D41_ _ _ _ _ _ 7202D61_ _ _ _ _ _ 7202D62_ _ _ _ _ _	Vertical panel with cap on one end 4 × 1 × 96" 6 × 1 × 96" 6 × 2 × 96"		Class A	•	•	•	•	•
	7203D41_ _ _ _ _ _ 7203D61_ _ _ _ _ _ 7203D62_ _ _ _ _ _	Vertical panel with no end caps 4 × 1 × 96" 6 × 1 × 96" 6 × 2 × 96"		Class A	•	•	•	•	•

FAST 4 WEEKS or Less

FAST134 program items ready to ship from manufacturer in 4 weeks or less.
Up-to-date lead times and product options (sizes and colors) at armstrongceilings.com/fast134

◆ When specifying or ordering, include the appropriate perforation and color suffix with the item number (e.g., 8157D41 M 1 5 F X C H).


ACOUSTIC INFORMATION Dots represent high level of performance.

NRC

Blade	4" O.C.	6" O.C.	12" O.C.	16" O.C.	20" O.C.	24" O.C.
4" × 1"	0.55	0.45	0.25	0.20	0.20	0.15
6" × 1"	0.85 •	0.65	0.45	0.35	0.30	0.25
6" × 2"	1.05 •	0.80 •	0.50	0.40	0.35	0.30


DESIGN EXAMPLES Multiple lengths and swivel attachment clip allow for design freedom. Below are some design layout examples from our MetalWorks Blades design guide.

1' × 4' Grid Layouts

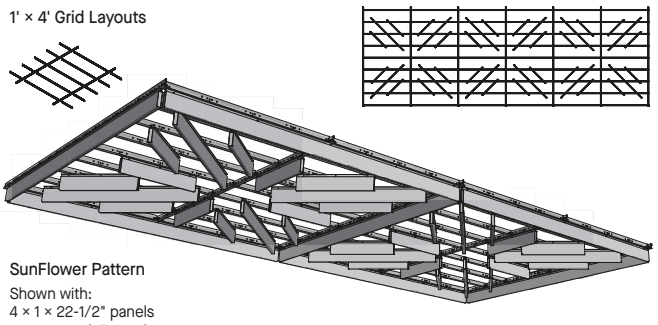

SunFlower Pattern
Shown with:
4 × 1 × 22-1/2" panels
4 × 1 × 46-1/2" panels

4' × 4' Grid Layouts

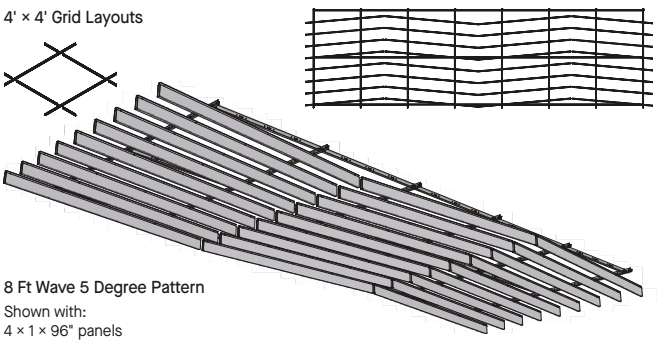

8 Ft Wave 5 Degree Pattern
Shown with:
4 × 1 × 96" panels

TechLine 877 276-7876
armstrongceilings.com/metalworksbladesclassics

Armstrong® World Industries

METALWORKS™ Blades – Classics

Linear Panels with Acoustical Options

smooth texture

SUSTAIN® High Performance Sustainable Ceiling Systems

Declare.

RECYCLED CONTENT UP TO 15%

LEED V5

COMMON MATERIALS FRAMEWORK		Climate Health	EPD
Human Health	Declare Label	Ecosystem Health	EPD
	HPD		
	3rd Party CDPH	Circular Economy	✓
OCCUPANT EXPERIENCE		Acoustics	✓

SUSPENSION SYSTEM & ACCESSORIES

	Item No.◆	Description	Dimensions (Inches) Nominal L × W × H	Color	PCS/CTN
Suspension Systems	**7301_ _**	Prelude® XL® 12' HD Main Beam	144 × 15/16 × 1-11/16"	White, Silver Grey, Gun Metal Grey*	20
	XL7341	Prelude XL 4' Cross Tee	48 × 15/16 × 1-11/16"	White, Black*	60
	XL8320	Prelude XL 2' Cross Tee	24 × 15/16 × 1-11/16"	White, Black*	60
	730136BL	Black 360 Prelude XL 12' HD Main Beam	144 × 15/16 × 1-11/16"	Black	20
	XL734036BL	Black 360 Prelude XL 4' Cross Tee	48 × 15/16 × 1-11/16"	Black	60
	XL732036BL	Black 360 Prelude XL 2' Cross Tee	24 × 15/16 × 1-11/16"	Black	60
Wall-to-Wall Installations	**780036**	12' Angle Molding	144 × 7/8 × 7/8"	White, Black*	30
	HD7801_ _	10' Angle Molding	120 × 7/8 × 7/8"	Silver Grey, Gun Metal Grey*	30
	BERC2	Beam End Retaining Clip	N/A	N/A	200
Floating Cloud Installation	**AX6STR_ _ _**◆	Axiom® Classic 6" Straight Trim	120 × 3/4 × 5-13/16"	White, Black, Silver Grey, Gun Metal Grey* Black is recommended for Sequels panel finishes	N/A
	7239	Adjustable Trim Clip (ATC)	N/A	N/A	50
	5344_ _ _ _	4" Effects Wood Looks Trim	Nominal 120" Length	Effects Finishes	6
	5346_ _ _ _	6" Effects Wood Looks Trim	Nominal 120" Length	Effects Finishes	6

◆ Add the 2-digit color suffix to the item number when specifying or ordering (e.g. AX6STR S G), add an extra digit "3" before the color suffix if paint is required inside and outside of trim (e.g. AX6STR 3 S G).
* Items with the same finish name will coordinate but may not be an exact color match.


ACCESSORIES

	Item No.◆◆	Description	Color	Pcs/Ctn
	**7204 _ _**	MetalWorks™ Blades – Classics Attachment Clip	Stainless Steel, Black Oxide	100
	**7205D41** **7205D61** **7205D62**	MetalWorks Blades – Classics 4" × 1" Alignment Device 6" × 1" Alignment Device 6" × 2" Alignment Device	N/A	24
	**8158D41_ _ _ _** **8158D61_ _ _ _** **8158D62_ _ _ _**	MetalWorks Blades – Classics 4" × 1" Field-Cut End Cap 6" × 1" Field-Cut End Cap 6" × 2" Field-Cut End Cap	Whitelume, Silverlume, Gun Metal, Sequels Finishes, Effects Finishes	10

◆◆ When specifying or ordering, include the color suffix with the item number (e.g., 8158D41 F X C H).

SUSPENSION SYSTEMS

15/16"



Prelude XL suspension system (Black) or 360° Painted Grid

PHYSICAL DATA

Material
Aluminum – thickness 0.032"

Surface Finish
Painted: Factory-applied polyester paint
Sequels™: Pre-coated coil
Effects™: Powder-coated, dye-sublimation, post-production finish

Custom colors and finishes also available. Contact TechLine for custom color matching requests at 1 877 276-7876.

Fire Performance
Class A: Tested per ASTM E84. Flame Spread Index 25 or less. Smoke Developed Index 50 or less.

CAN/ULC S102 surface burning characteristics. Flame Spread Rating 25 or less. Smoke Developed Classification 50 or less.

Acoustical Options
Perforated panels are supplied with a black fiberglass fleece acoustic infill bag to absorb sound (varies by Blades panel length).

Design Considerations
When installed, panels hang either 4-7/8" or 6-7/8" below the face of the grid, depending on the depth of Blade. Panels can be supported by intermediate duty main beams or cross tees, with 2 attachment clips per panel. See MetalWorks Blades – Classics design guide online for additional design layouts.

MetalWorks Blades – Classics can be cut in the field only when using the Field-Cut End Cap. See installation instructions for details.

VOC Emissions
Third-party certified compliant with California Department of Public Health CDPH/EHLB/Standard Method Version 1.2, 2017. This standard is the guideline for low emissions in LEED®, WELL Building Standard™, Living Building Challenge® (LBC), CalGreen Title 24, ANSI/ASHRAE/USGBC/IES Standard 189; ANSI/GBI Green Building Assessment Protocol.

Installation Considerations
Panels with certain product finishes, e.g., Effects™ and Natural Reflections, are not MetalWorks™ FASTPeel™ panels and will be protected by other means for packaging and handling purposes.

Design Support
For custom design assistance contact ProjectWorks® Design Services or visit armstrongceilings.com/projectworks

Seismic Restraint
MetalWorks Blades – Classics are approved for application in all seismic areas when installed per the seismic guidelines in the Armstrong Ceilings installation instructions.

FAST134 Program Considerations
Size of Job Matters: Big jobs, over 2500 SF or 50 pieces for shapes/vertical elements will have longer lead times.

Location Matters: Transit time not included. We are ready to ship in 1 week on FAST1 items. However, transit to the states west of Wyoming may add time.

Distributor Truck Schedule Matters: We rely on distribution to help move products around the country. When speed matters, work with your local distributor to ensure FAST134 service.

Stock vs Made-to-Order Matters: FAST3 & FAST4 items are made-to-order and will ship direct to distributor. FAST1 (stocked items) will go through distribution and depend on distributor truck schedules.

Cleaning and Disinfecting
Cleaning and CDC-approved disinfecting options available on armstrongceilings.com/cleaning

Warranty
Details at armstrongceilings.com/warranty

Weight
D41 panels: 0.50 LBS/LF
D61 panels: 0.61 LBS/LF
D62 panels: 0.68 LBS/LF

TechLine / 877 276-7876
armstrongceilings.com/metalworksbladesclassics

BPCS-5092-726

LEED® is a registered trademark of the U.S. Green Building Council; Declare® and Living Building Challenge® (LBC) are registered trademarks of the International Living Future Institute®; WELL™ and WELL Building Standard™ are trademarks of the International WELL Building Institute; Revit® is a registered trademark of Autodesk, Inc.; all other trademarks used herein are the property of AWI Licensing LLC and/or its affiliates © 2026 AWI Licensing LLC

Armstrong® World Industries