
METALWORKS™ SecureLock™ Plus

Interior
smooth texture



CAD/Revit® drawings at:
armstrong.com/cadrevit

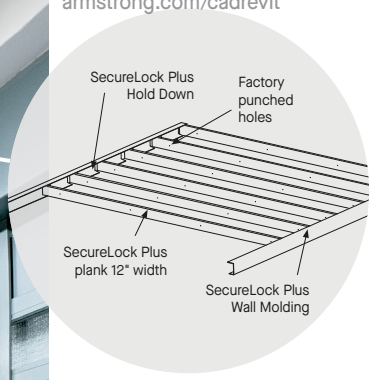

MetalWorks™ SecureLock™ Plus plank unperforated in White

Tamper-resistant ceilings for non-accessible plenum areas.

KEY SELECTION ATTRIBUTES

- Tamper-proof plank ceiling
- System capable of withstanding 600 impacts with 200 foot-pound of energy
- Screw-in point-load plank system tested to withstand 960 to 3,100 lbs of force
- 12-, 14-, and 16-gauge galvanized steel planks for added strength and durability
- 16-gauge stainless-steel planks and suspension available for shower or high humidity areas force
- Available in 12", 18", and 24" widths and up to 12' lengths
- Protection against contraband concealment
- Concealed locking
- Durable – Washable, scrubbable, soil resistant

Panels, perforations, and finishes listed on this data page have been accepted by the New York State Office of Mental Health (NYS-OMH) Patient Standards, Material and Systems Guidelines.


The NYS-OMH Patient Safety Guide lists approved lighting and MEP options. Please refer to those manufacture guidelines on incorporating lighting and MEP into the MetalWorks SecureLock Plus panel. The responsibility for secure attachment and compliance of integrated lighting and MEP options is delegated to the manufacturer of the integrated lighting or MEP component.

Visit armstrong.com/security to learn more about the security portfolio of products.

TYPICAL APPLICATIONS

- Correctional facilities
- Judicial facilities/courthouses
- Non-accessible areas
- Healthcare – psychiatric and juvenile wards
- Transportation
- Maximum security areas

DETAILS



MetalWorks™ SecureLock™ Plus Perforated Plank

COLORS Due to printing limitations, shade may vary from actual product.

Standard

White
(WH)

Premium Colors & Finishes



Silver Grey
(SG)



Gun Metal Grey
(MY)



Custom Colors
Available



Custom Wood-look
Finishes Available

For custom options contact ASQuote,
ASQuote@armstrong.com

PERFORATION OPTIONS (1:2 scale shown)

Standard



P1
(Unperforated)

P5
(SecureLock Plus
Perforation)

TechLine 877 276-7876
armstrong.com/metalworkssecurelock

Armstrong®
World Industries

METALWORKS™ SecureLock™ Plus

Interior
smooth texture

RECYCLED CONTENT	LEED V5	
UP TO 15%	COMMON MATERIALS FRAMEWORK	Climate Health
	Human Health	Ecosystem Health
	3rd Party CDPH	Circular Economy ✓
	OCCUPANT EXPERIENCE	Acoustics ✓

VISUAL SELECTION


Custom Options	
Plank Sizes	W: 12", 18", 24" L: 48", 72", 96", 120", 144"
Plank Gauge	12, 14, 16 gauge Steel 16 gauge Stainless Steel (high humidity areas)

ACOUSTIC INFORMATION

Perforation	NRC*	% Open
P1 Unperforated	N/A	N/A
P5 SecureLock Plus Perforation	0.80	23%

* With optional fiberglass infill item 8200T10

INSTALLATION DETAILS

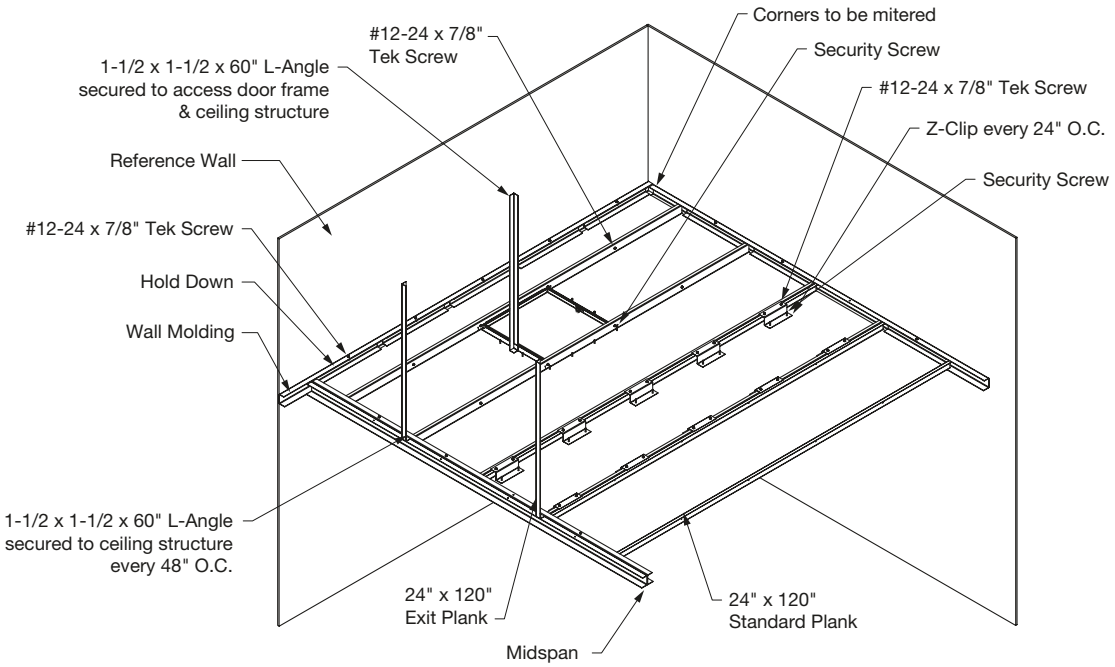

PHYSICAL DATA

Material
12-, 14-, and 16-gauge electrogalvanized steel
18-gauge stainless-steel available

Surface Finish
Factory-applied powder-coated finish (post-coated)

Fire Performance
ASTM E84 and CAN/ULC S102. Flame Spread Index 25 or less. Smoke Developed Index 50 or less.

Design/Installation Considerations
Planks installed in correctional facilities are recommended for supervised areas. For detailed impact and point load test results, contact TechLine at 877 276 7876.

Warranty
Details at armstrong.com/warranty

Weight (Unperforated)
12-gauge – 4.53 lbs/SF
14-gauge – 3.24 lbs/SF
16-gauge – 2.66 lbs/SF

TechLine / 877 276-7876
armstrong.com/metalworkssecurelock

BPCS-4205-1026

LEED® is a registered trademark of the U.S. Green Building Council; Living Building Challenge® (LBC) is a registered trademark of the International Living Future Institute®; WELL™ and WELL Building Standard are trademarks of the International WELL Building Institute; all other trademarks used herein are the property of AWI Licensing LLC and/or its affiliates © 2026 AWI Licensing LLC

Armstrong® World Industries