METALWORKS™

Vector® & Vector Exterior
smooth texture

FAST 4 WEEKS or Less

FAST134
Select Items Ship Fast
armstrongceilings.com/fast134

CAD/Revit® drawings at:
armstrongceilings.com/cadrevit



MetalWorks™ Vector exterior and interior panels

plus capabilities to do more



armstrongceilings.com/capabilities
See more photos at:
armstrongceilings.com/photogallery

Durable, steel panels offer a 1/4" reveal and 100% downward accessibility.

KEY SELECTION ATTRIBUTES

- Available in 17 Effects™ wood-look finishes for interior and exterior applications
- Exclusive Vector® panel edge profile installs on new or existing 15/16" exposed tee suspension system resulting in a thin 1/4" reveal
- CleanAssure™ family of products – includes disinfectable panels, suspension systems, and trim
- Panels can be used to create continuous looks or clouds using Axiom® trim or Effects™ Wood-looks trim
- Select products included in the FAST134 program – ready to ship in 4 weeks or less
- Exterior system available, tested to meet wind uplift Classes 30, 60, and 90
- Outstanding NRC with acoustical fleece or infill panel (0.65 – 0.90)
- Installs with minimal plenum clearance
- Plenum access per panel without the need of special tools



Available in 4 weeks or less order-to-ship!

TechLine 877 276-7876
armstrongceilings.com/metalworks

Armstrong® World Industries

METALWORKS™

Vector® & Vector Exterior
smooth texture

RECYCLED CONTENT
UP TO **25%**

LEED V5

COMMON MATERIALS FRAMEWORK	Climate Health
Human Health	Ecosystem Health
	Circular Economy ✓
OCCUPANT EXPERIENCE	Acoustics ✓



MetalWorks™ Vector® – Extra Microperforated in Effects Wood Looks Cherry

STANDARD COLORS & FINISHES
Due to printing limitations, shade may vary from actual product.

MetalWorks™ (Interior, Exterior)




White (WH, WH2) | Silver Grey (SG, SG2) | Gun Metal Grey (MY, MY2)

Effects™ Classic (Interior, Exterior)
Dye-Sublimation



Effects Cherry (FXCH, FXCH2) | Effects Dark Cherry (FXDC, FXDC2) | Effects Oak (FXOK, FXOK2)



Effects Walnut (FXWN, FXWN2) | Effects Walnut Espresso (FXWE, FXWE2)

Effects™ Bold (Interior, Exterior)
Dye-Sublimation



Effects Sea Salt (FXSS, FXSS2) | Effects Ginger (FXGR, FXGR2) | Effects Nutmeg (FXNM, FXNM2)



Effects Poppy Seed (FXPS, FXPS2) | Effects Peppercorn (FXPC, FXPC2) | Effects Almond (FXAL, FXAL2)

Effects™ Subtle (Interior, Exterior)
Dye-Sublimation




Effects Sesame (FXSE, FXSE2) | Effects Macadamia (FXMA, FXMA2) | Effects Cinnamon (FXCM, FXCM2)



Effects Flax (FXFL, FXFL2) | Effects Cocoa Bean (FXCB, FXCB2) | Effects Coriander (FXCO, FXCO2)

NOTE: Effects colors are only available for unperforated and extra microperforated panels.


CUSTOM COLORS & FINISHES
Due to printing limitations, shade may vary from actual product.



Custom Colors Available | Custom Wood-look Finishes Available

For custom options contact ASQuote, ASQuote@armstrongceilings.com


PERFORATION OPTIONS
(1:2 scale shown)



M1 (Unperforated) | M2 (Microperforated) | M3 (Extra Microperforated)

Custom Perforations Available

DETAILS



1. MetalWorks™ Vector® Microperforated
2. MetalWorks™ Vector® Unperforated with Prelude® XL® 15/16" suspension system

TechLine 877 276-7876
armstrongceilings.com/metalworks

Armstrong® World Industries

METALWORKS™ – Standard

METALWORKS™


Vector® & Vector Exterior
smooth texture

RECYCLED CONTENT
UP TO 25%

LEED V5
COMMON MATERIALS FRAMEWORK
Climate Health
Human Health
Ecosystem Health
Circular Economy
OCCUPANT EXPERIENCE
Acoustics

VISUAL SELECTION

	Item No. ◆	Dimensions (Inches)	Perforations
METALWORKS™ Vector® 1/4" Reveal with 15/16" Vector®	**6466** _ _ _ _ _ _ _	24" × 24" ☐	M1, M2, M3



FAST 4 WEEKS or Less

FAST134 program items ready to ship from manufacturer in 4 weeks or less.
Up-to-date lead times and product options (sizes and colors) at armstrongceilings.com/fast134

◆ When specifying or ordering, include the appropriate color, perforation and, if needed, coating suffix with the item number (e.g., 6466 M 1 W H, 6466 M 3 F X C H).
NOTE: Perforation M2 not available in Effects™ finishes as a standard option.

PERFORMANCE

Fire Performance	Light Reflect (White only)	CleanAssure™ Disinfectable Panels: Fog	Spray	Wipe	DURABILITY: Wash	Scrub	Impact
Class A	0.77 (M1)		•	•	•	•	•

ACOUSTICAL INFORMATION

Performance determined by perforation size.
Dots represent high level of performance.

Perforation		% Open Area	Infill Panel Item No.	NRC
M1	Unperforated	–	–	N/A
M2	Microperforated	18.4%	No Infill	0.70†
			8200T10	0.90
			5479	0.85
			5823	0.85
M3	Extra Microperforated	1.5%	No Infill	0.65†
			8200T10	0.70
			5479	0.70
			5823	0.70

Perforation		% Open Area	Infill Panel Item No.	CAC
M1	Unperforated	–	–	36†
M2	Microperforated	18.4%	770	31
M3	Extra Microperforated	1.5%	770	33

† Acoustical fleece

ACCESSORIES


Additional accessories, including moldings and perimeter trim, at armstrongceilings.com/mwaccessories

Item No. ◆	Description	Dimensions (Inches)	Pieces/Carton
5342 _ _ _ _	2" Effects™ Wood Looks Trim	120 × 3/4 × 2"	6
5344 _ _ _ _	4" Effects Wood Looks Trim	120 × 4 × 4"	6
5346 _ _ _ _	6" Effects Wood Looks Trim	120 × 6 × 6"	6
5479	BioAcoustic™ Infill Panel (Beige – Matte)	24 × 24 × 5/8"	12
5823	BioAcoustic™ Infill Panel (Black – Matte)	24 × 24 × 5/8"	12
6098_ _	Edge Cap for Cut Vector Panels not available in Effects™ finishes, order in Black (BL)	Nominal 24" length	50
8200T10	1" Fiberglass Infill Bag (Black – Gloss)	24" × 24"	12
FXSPTHDC	Effects™ Hold-Down Clip for Cut Panel Installations	N/A	10

◆ When specifying or ordering, include the appropriate color, perforation and, if needed, coating suffix with the item number

SUSPENSION SYSTEMS

15/16"



Prelude® XL®
Prelude XL for Exterior Applications

METALWORKS™


Vector® & Vector Exterior
smooth texture

RECYCLED CONTENT
UP TO 25%


LEED V5

COMMON MATERIALS FRAMEWORK	Climate Health
Human Health	Ecosystem Health
	Circular Economy ✓
OCCUPANT EXPERIENCE	Acoustics ✓


PANEL EDGE DETAILS

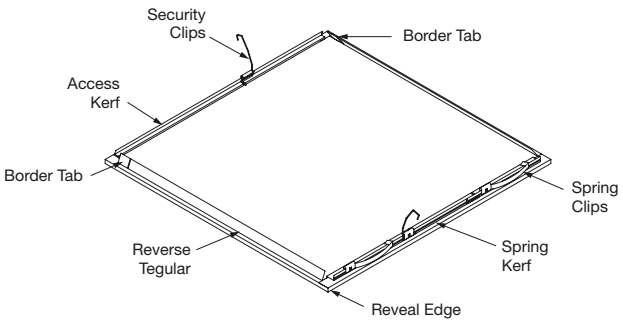

MetalWorks™ Vector® Panel

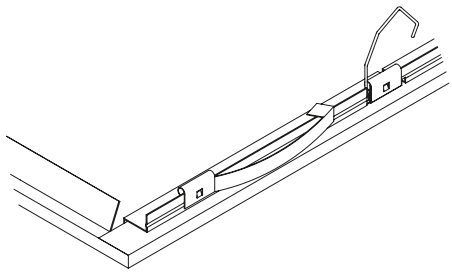

Spring Kerf

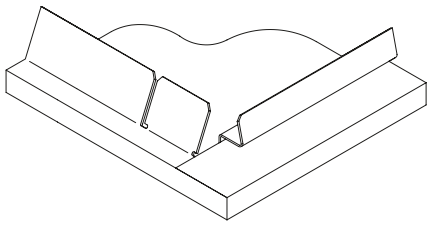

Access Kerf



Reverse Tegular Edges

PHYSICAL DATA

Material
Electrogalvanized Steel – 0.021" thickness

Surface Finish
Factory-applied powder-coated finish (post-coated for color)
Exterior: Factory-applied powder-coated finish (post-coated on both sides). Effects finish on face only.

Custom colors also available. Contact TechLine for custom color matching requests at 877 276-7876.

Fire Performance
Class A: ASTM E84 and CAN/ULC S102. Flame Spread Index 25 or less. Smoke Developed Index 50 or less.

ASTM E1264 Classification
Fire Class – Class A

Unperforated – Type XX, Pattern G
Perforated – Type XX, Pattern C

VOC Emissions
Third-party certified compliant with California Department of Public Health CDPH/EHLB/Standard Method Version 1.2, 2017. This standard is the guideline for low emissions in LEED®, WELL Building Standard™, Living Building Challenge® (LBC), CalGreen Title 24, ANSI/ASHRAE/USGBC/IES Standard 189; ANSI/GBI Green Building Assessment Protocol.

Installation Consideration
For information about accessible faceted applications, refer to installation instructions at armstrongceilings.com/installation.

Wind Uplift Performance
MetalWorks™ Vector® panels for exterior flat applications have been tested to meet wind uplift Classes 30, 60, and 90. There is no fleece on exterior panels. Visit armstrongceilings.com/metalworks or contact TechLine at 877 276-7876 for installation instructions and test documentation.

Seismic Restraint
MetalWorks™ Vector® panels have been engineered, tested, and approved for application in all seismic areas when installed per Armstrong Ceilings installation instructions.

Cleaning and Disinfecting
Cleaning and CDC-approved disinfecting options available on armstrongceilings.com/cleaning

Warranty
Details at armstrongceilings.com/warranty

FAST134 Program Considerations
Size of Job Matters: Big jobs, over 2500 SF or 50 pieces for shapes/vertical elements will have longer lead times.

Location Matters: Transit time not included. We are ready to ship in 1 week on FAST1 items. However, transit to the states west of Wyoming may add time.

Distributor Truck Schedule Matters: We rely on distribution to help move products around the Country. When speed matters, work with your local distributor to ensure FAST134 service.

Stock vs Made-to-Order Matters: FAST3 & FAST4 items are made-to-order and will ship direct to distributor. FAST1 (stocked items) will go through distribution and depend on distributor truck schedules.

Weight; Square Feet/Carton
6466M1, 6466M3 – 1.15 lbs/SF; 40 SF/ctn
6466M2 – 1.10 lbs/SF; 40 SF/ctn

TechLine / 877 276-7876
armstrongceilings.com/metalworks

BPCS-5110-726

LEED® is a registered trademark of the U.S. Green Building Council; Declare® and Living Building Challenge® (LBC) are registered trademarks of the International Living Future Institute®; WELL™ and WELL Building Standard™ are trademarks of the International WELL Building Institute; Revit® is a registered trademark of Autodesk, Inc.; all other trademarks used herein are the property of AWI Licensing LLC and/or its affiliates © 2026 AWI Licensing LLC

Armstrong® World Industries