SOUNDSCAPES® Blades

Linear Acoustical Panels
fine texture


FAST 4 WEEKS or Less

FAST134
Select Items Ship Fast
armstrongceilings.com/fast134



SoundScapes® Blades in White, Stone, and Black

CAD/Revit® drawings at:
armstrongceilings.com/cadrevit



Wall application

SoundScapes® Blades vertical panels achieve acoustical excellence in your space – with versatile ways to install on ceilings and walls.

KEY SELECTION ATTRIBUTES

- new · Now available in 15 colors inspired by nature
- Mix standard designs, lengths, and depths for dynamic visuals
- Sound absorption up to 1.80 NRC dependent on blade depth and spacing
- Select products included in the FAST134 program – ready to ship in 4 weeks or less

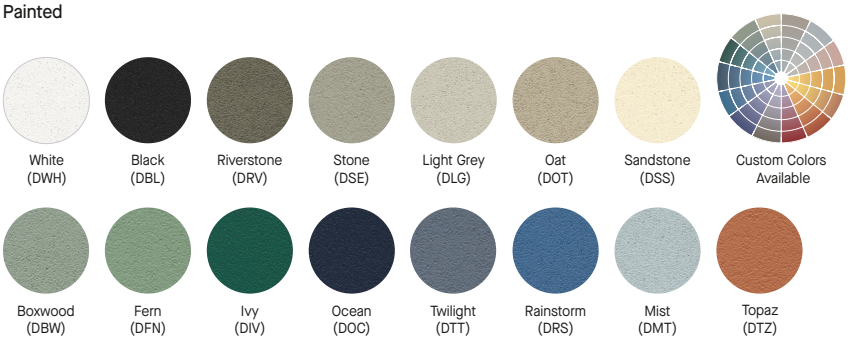
- new · Color-coordinated Prelude® suspension systems available
- Three installation options for maximum ceiling and wall design flexibility
  - From standard suspension system
  - From individual cable suspension
  - Direct-attach method using Axiom® wall molding

- 20 vertical panel sizes and shapes
- Mold- and mildew-resistant surface
- Linear, upscale visual
- Seismic-tested
- White embedded hanging clips
- CleanAssure™ family of products – includes disinfectable panels, suspension systems, and trim

- Custom panel options available
- Add scrim to top edge as a premium option
- ASTM E84 Class A Fire Performance
- Made in the U.S.A. of domestic and global content
- Build America, Buy America (BABA) Act compliant

COLORS Due to printing limitations, shade may vary from actual product.

new Painted





Wood Looks Available!

For premium and custom capabilities, contact ASQuote@armstrongceilings.com

TechLine 877 276-7876
armstrongceilings.com/soundscapesblades

Armstrong® World Industries

SOUNDSCAPES® Blades

Linear Acoustical Panels
fine texture


LEED® WELL™ LBC

43% RECYCLED CONTENT


For LEED contribution contact TechLine

energy management	construction waste mgmt	regional materials	design for flexibility	EPD	recyclable/ extended producer resp.	biobased materials	recycled content	sourcing of raw materials	material ingredient reporting	low emitting/ materials	lighting quality	acoustics
✓		✓	✓				✓	✓			✓	✓

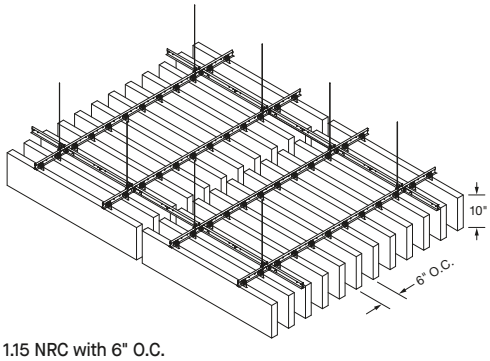
▲ LOCATION DEPENDENT



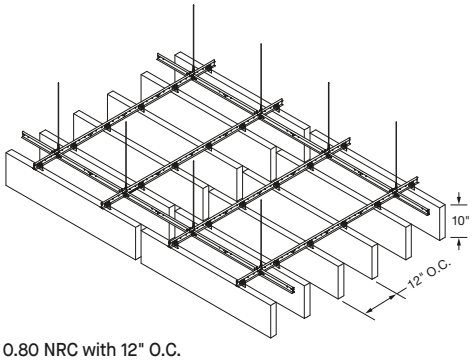
1.15 NRC with 6" O.C.
Blade Spacing



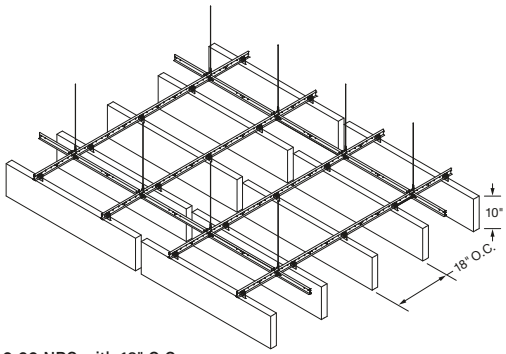0.80 NRC with 12" O.C.
Blade Spacing



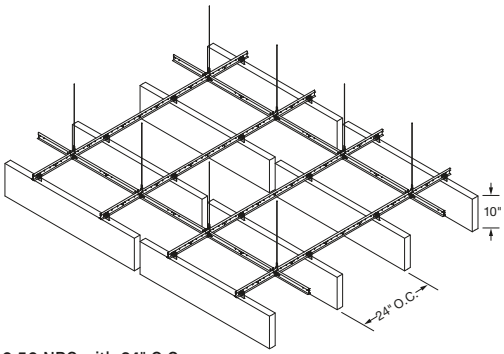0.60 NRC with 18" O.C.
Blade Spacing




0.50 NRC with 24" O.C.
Blade Spacing

ACOUSTIC INFORMATION

Panel Depth	NRC 6" O.C.	NRC 12" O.C.	NRC 18" O.C.	NRC 24" O.C.
5"	0.80	0.50	0.40	0.30
7-1/2"	1.00	0.65	0.50	0.40
10"	1.15	0.80	0.60	0.50
10-1/2"	1.15	0.80	0.60	0.50
16"	1.35	1.00	0.75	0.55
19-1/2"	1.40	1.00	0.75	0.60
22"	1.45	1.00	0.75	0.65
22-1/2"	1.45	1.00	0.80	0.65
28"	1.80	1.35	1.10	0.95

NOTE: Tested per ASTM C423 without infill panels. Spacing of blades, blade depth, and acoustical infill panels will impact acoustical performance. Contact TechLine for a custom reverberation time report at techline@armstrongceilings.com

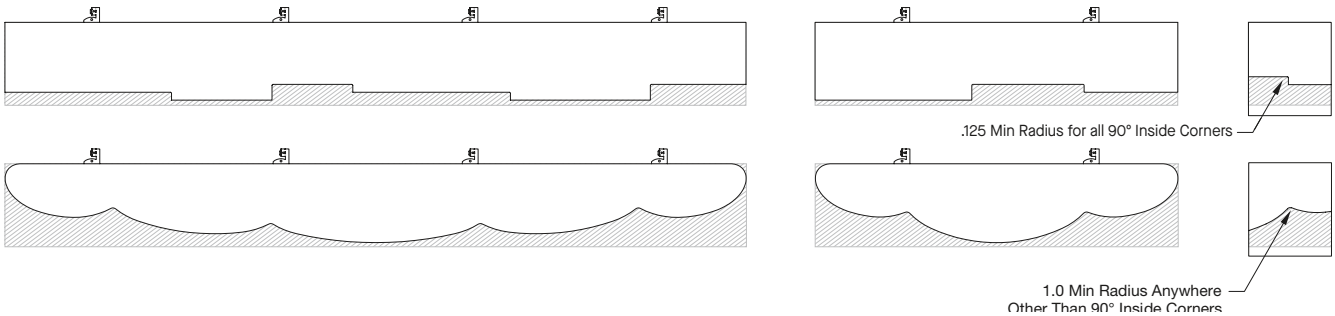CUSTOM PANEL DESIGN EXAMPLES



BLADES – Standard

SOUNDSCAPES® Blades

Linear Acoustical Panels
fine texture

LEED® | WELL | LBC

43% RECYCLED CONTENT








For LEED contribution contact TechLine

energy management · construction waste mgmt · regional materials · design for flexibility · EPD · recyclable/ extended producer resp. · biobased materials · recycled content · sourcing of raw materials · material ingredient reporting · low emitting/ materials · lighting quality · acoustics

▲ LOCATION DEPENDENT

VISUAL SELECTION Shown in elevation view

PERFORMANCE Dots represent high level of performance.

Item No.◆	Description	Dimensions (Inches)		(White only) Light Reflect	Fire Rating	Bio-Block® Anti-Mold/ Mildew	Humi-Guard+ Sag Resist	CleanAssure™ Disinfectable Panels: Fog	Spray	DURABILITY: Wash*	Impact	Soil
8250F03RH05 _ _ _ (formerly item no. 7190)	Rectangular Vertical Panel	5 × 46 × 2"		0.88 •	Class A	•	•	•	•	•	•	•
8250F03RH06 _ _ _ (formerly item no. 7191)	Rectangular Vertical Panel	5 × 94 × 2"		0.88 •	Class A	•	•	•	•	•	•	•
8250F03RH01 _ _ _ (formerly item no. 3920)	Rectangular Vertical Panel	10 × 46 × 2"		0.88 •	Class A	•	•	•	•	•	•	•
8250F03RH02 _ _ _ (formerly item no. 3921)	Rectangular Vertical Panel	10 × 94 × 2"		0.88 •	Class A	•	•	•	•	•	•	•
8250F03RH07 _ _ _ (formerly item no. 7192)	Rectangular Vertical Panel	16 × 46 × 2"		0.88 •	Class A	•	•	•	•	•	•	•
8250F03RH08 _ _ _ (formerly item no. 7193)	Rectangular Vertical Panel	16 × 94 × 2"		0.88 •	Class A	•	•	•	•	•	•	•
8250F03RH03 _ _ _ (formerly item no. 3922)	Rectangular Vertical Panel	22 × 46 × 2"		0.88 •	Class A	•	•	•	•	•	•	•

FAST 4 WEEKS or Less

FAST134 program items ready to ship from manufacturer in 4 weeks or less.
Up-to-date lead times and product options (sizes and colors) at armstrongceilings.com/fast134

NOTE: Scrimmed top edges offered as "Premium." contact ASQuote@armstrongceilings.com
◆ Add 3-letter color suffix to end of item number (e.g., 8250F03RH02 D W H = White)
* White only.

TechLine 877 276-7876
armstrongceilings.com/soundscapesblades

Armstrong® World Industries

SOUNDSCAPES® Blades

Linear Acoustical Panels

fine texture

LEED® WELL™ LBC

43% RECYCLED CONTENT

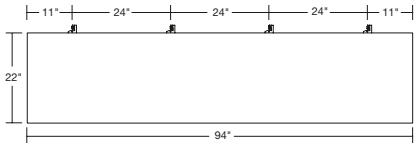

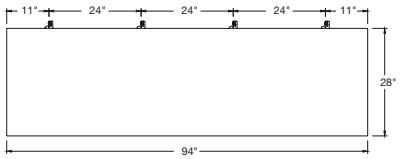




For LEED contribution contact TechLine

energy management · construction waste mgmt · regional materials ▲ · design for flexibility · EPD · recyclable/ extended producer resp. · biobased materials · recycled content · sourcing of raw materials · material ingredient reporting · low emitting/ materials · lighting quality · acoustics

▲ LOCATION DEPENDENT

VISUAL SELECTION Shown in elevation view

PERFORMANCE Dots represent high level of performance.

Item No.◆	Description	Dimensions (Inches)		(White only) Light Reflect	Fire Rating	Bio-Block® Anti-Mold/ Mildew	Humi-Guard+ Sag Resist	CleanAssure™ Disinfectable Panels Fog	Spray	DURABILITY Wash*	Impact	Soil
8250F03RH04 _ _ _ (formerly item no. 3923)	Rectangular Vertical Panel	22 × 94 × 2"		0.88 •	Class A	•	•	•	•	•	•	•
8250F03RH09 _ _ _ (formerly item no. 7194)	Rectangular Vertical Panel	28 × 46 × 2"		0.88 •	Class A	•	•	•	•	•	•	•
8250F03RH10_ _ _ (formerly item no. 7195)	Rectangular Vertical Panel	28 × 94 × 2"		0.88 •	Class A	•	•	•	•	•	•	•
8250F03CH01_ _ _ (formerly item no. 7240)	Hill Vertical Panel	7-1/2 × 46 × 2"		0.88 •	Class A	•	•	•	•	•	•	•
8250F03CH02_ _ _ (formerly item no. 7241)	Valley Vertical Panel	10-1/2 × 46 × 2"		0.88 •	Class A	•	•	•	•	•	•	•
8250F03CH03_ _ _ (formerly item no. 7242)	Hill Vertical Panel	19-1/2 × 46 × 2"		0.88 •	Class A	•	•	•	•	•	•	•
8250F03CH04_ _ _ (formerly item no. 7243)	Valley Vertical Panel	22-1/2 × 46 × 2"		0.88 •	Class A	•	•	•	•	•	•	•

FAST 4 WEEKS or Less

FAST134 program items ready to ship from manufacturer in 4 weeks or less.
Up-to-date lead times and product options (sizes and colors) at armstrongceilings.com/fast134

NOTE: Scrimmed top edges offered as "Premium." contact ASQuote@armstrongceilings.com
◆ Add 3-letter color suffix to end of item number (e.g., 8250F03RH02 D W H = White)
* White only.

SOUNDSCAPES® Blades

Linear Acoustical Panels
fine texture

LEED® WELL™ LBC

43% RECYCLED CONTENT







For LEED contribution contact TechLine

energy management ✓ | construction waste mgmt | regional materials ✓ | design for flexibility ✓ | EPD | recyclable/ extended producer resp. | biobased materials | recycled content ✓ | sourcing of raw materials ✓ | material ingredient reporting | low emitting/ materials | lighting quality ✓ | acoustics ✓

▲ LOCATION DEPENDENT

VISUAL SELECTION Shown in elevation view

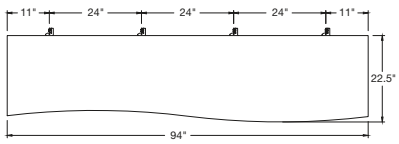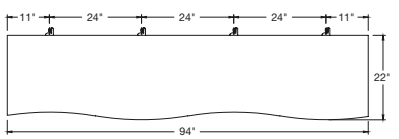PERFORMANCE Dots represent high level of performance.

Item No.◆	Description	Dimensions (Inches)		(White only) Light Reflect	Fire Rating	Bio-Block® Anti-Mold/ Mildew	Humi-Guard+ Sag Resist	CleanAssure™ Disinfectable Panels Fog	Spray	DURABILITY Wash*	Impact	Soil
8250F03WH01 _ _ _ (formerly item no. 7244)	Wave Vertical Panel	10-1/2 × 94 × 2"		0.88 •	Class A	•	•	•	•	•	•	•
8250F03WH02 _ _ _ (formerly item no. 7245)	Wave Vertical Panel	22-1/2 × 94 × 2"		0.88 •	Class A	•	•	•	•	•	•	•
8250F03WH03 _ _ _ (formerly item no. 7246)	Wave Vertical Panel	10 × 46 × 2"		0.88 •	Class A	•	•	•	•	•	•	•
8250F03WH04 _ _ _ (formerly item no. 7247)	Wave Vertical Panel	22 × 46 × 2"		0.88 •	Class A	•	•	•	•	•	•	•
8250F03WH05 _ _ _ (formerly item no. 7248)	Double Wave Vertical Panel	10 × 94 × 2"		0.88 •	Class A	•	•	•	•	•	•	•
8250F03WH06 _ _ _ (formerly item no. 7249)	Double Wave Vertical Panel	22 × 94 × 2"		0.88 •	Class A	•	•	•	•	•	•	•

FAST 4 WEEKS or Less

FAST134 program items ready to ship from manufacturer in 4 weeks or less.
Up-to-date lead times and product options (sizes and colors) at armstrongceilings.com/fast134

NOTE: Scrimmed top edges offered as "Premium," contact ASQuote@armstrongceilings.com
◆ Add 3-letter color suffix to end of item number (e.g., 8250F03RH02 D W H = White)
* White only.

BLADES – Standard

SOUNDSCAPES® Blades

Linear Acoustical Panels
fine texture

LEED® WELL™ LBC


43% RECYCLED CONTENT

For LEED contribution contact TechLine


energy management · construction waste mgmt · regional materials · design for flexibility · EPD · recyclable/ extended producer resp. · biobased materials · recycled content · sourcing of raw materials · material ingredient reporting · low emitting/ materials · lighting quality · acoustics


▲ LOCATION DEPENDENT

THREE WAYS TO INSTALL





Direct to Grid Suspension System






Individual Suspension using Hanging Kit





Direct-attach Method using Axiom® Wall Molding



INSTALLATION OPTIONS


	Item No.◆	Description	LF/CTN
Direct to Grid Suspension System	**7301 _ _ _**	12' HD Main Beam	240
	XL7342 _ _ _	4' Cross Tee	240
	XL7328 _ _ _	2' Cross Tee	120
	7800 _ _ _	12' Angle Molding	360
360° Painted Direct to Grid Suspension System	**730136 _ _**	12' HD Main Beam (BL & WH)	240
	XL734036 _ _	4' Cross Tee (BL & WH)	240
	XL732036 _ _	2' Cross Tee (BL & WH)	120
	780036 _ _	12' Angle Molding (BL & WH)	360
Floating Cloud Installations	**AX4STR3 _ _**	10' Axiom® Classic 4" Straight Trim	See note*

360° finish colors are available (in heavy duty variations) for applications to match Axiom or when custom colors are needed. Please refer to the Prelude XL 360° Painted data sheet.

◆ When specifying or ordering items with a color, add the 2- or 3-digit suffix to the end of the item number (e.g. 7301 B L)

* 360° Paint Recommended; order by the piece

Prelude® XL®



	Item No.◆	Description	PCS/CTN	
Direct-Attach with Axiom® Wall Molding	**AXM34STR3 _ _**	10' Straight Wall Molding	See note*	
Individual Suspension Using Hanging Kit	**6655L8CR**	4-Point Hanging Kit	4 per bag	
Accessories	**ARBRKT**	Adjustable Hanger Bracket	80	
	6459BL	Black Rigid Attachment Clip	25	
	STAC	Single Tee Adapter Clip	120	
	625530	Extended Hanging Aircraft Cables (30') For use with Item 6655L8CR when longer cables are needed.	4	

◆ When specifying or ordering items with a color, add the two-letter suffix to the end of the item number (e.g. AXM34STR3 B L)

PHYSICAL DATA

Material
2" thick fiberglass with DuraBrite® scrim on face and sides.

Surface Finish
Colors: DuraBrite scrim with factory-applied paint on face and sides. Standard White has energy-saving, high light-reflective finish (LR 0.88). Top of panel is unfinished with white embedded hanging clips.

Fire Performance
SoundScapes® Blades panel material is ASTM E84 Class A: Flame Spread 25 or under and Smoke Developed 50 or less.

CAN/ULC S102 surface burning characteristics. Flame Spread Rating 25 or less. Smoke Developed Classification 50 or less.

SoundScapes Blades panels, as with other architectural features located in the ceiling plane, may obstruct or skew the existing or planned fire sprinkler water distribution pattern, or possibly delay the activation of the fire sprinkler or fire detection system. Consult a fire protection engineer, NFPA 13, and local codes for guidance on the proper installation techniques where fire detection or suppression systems are present.

Design Support
For custom design assistance contact ProjectWorks® Design Services or visit armstrongceilings.com/projectworks

Anti-Mold/Mildew
Ceiling tiles with BioBlock® performance resist the growth of mold and mildew on the tile surface.

Design Considerations
SoundScapes Blades panels maintain a natural bow that may be noticeable when installed 2" or less apart.

Special care in installation and handling must be taken with color panels to avoid surface damage to the paint finish. Custom colors are available.

5" SoundScapes Blades can now be used on walls, but are not recommended for use in high-traffic or high-impact areas. For best results, install above 7' from floor level.

SoundScapes Blades panels can be ordered with scrim on top edge as a premium.

Seismic Restraint
SoundScapes Blades are approved for all seismic areas when installed per the seismic guidelines in the Armstrong Ceilings installation instructions.

Recommended Suspension Systems
SoundScapes Blades panels are pre-assembled with metal hanging clips in the top of the panels. See Installation Instructions BPLA-297844 for installation details.

Warranty
Details at armstrongceilings.com/warranty

Panel Weight
8250F03RH05 – 2.2 LBS per panel
8250F03RH06 – 4.3 LBS per panel
8250F03RH01 – 3.6 LBS per panel
8250F03RH02 – 7.2 LBS per panel
8250F03RH07 – 5.4 LBS per panel
8250F03RH08 – 10.6 LBS per panel
8250F03RH03 – 7.2 LBS per panel
8250F03RH04 – 14.1 LBS per panel
8250F03RH09 – 8.9 LBS per panel
8250F03RH10 – 17.6 LBS per panel
8250F03CH01 – 2.9 LBS per panel
8250F03CH02 – 3.5 LBS per panel
8250F03CH03 – 6.4 LBS per panel
8250F03CH04 – 7.3 LBS per panel
8250F03WH01 – 7.5 LBS per panel
8250F03WH02 – 14.4 LBS per panel
8250F03WH03 – 3.6 LBS per panel
8250F03WH04 – 7.2 LBS per panel
8250F03WH05 – 7.2 LBS per panel
8250F03WH06 – 14.1 LBS per panel

Panels/Carton
4

Minimum Order Quantity
1 carton

BLADES – Standard

TechLine / 877 276-7876
armstrongceilings.com/soundscapesblades

BPCS-7121-526

LEED® is a registered trademark of the U.S. Green Building Council; Living Building Challenge® (LBC) is a registered trademark of the International Living Future Institute®; WELL™ and WELL Building Standard™ are trademarks of the International WELL Building Institute; Revit® is a registered trademark of Autodesk, Inc. all other trademarks used herein are the property of AWI Licensing LLC and/or its affiliates © 2026 AWI Licensing LLC

Armstrong® World Industries