
SOUNDSCAPES® Blades

Linear Acoustical Wall Panels
fine texture

FAST 4 WEEKS or Less
FAST134
Select Items Ship Fast
armstrongceilings.com/fast134



CAD/Revit® drawings at:
armstrongceilings.com/cadrevit

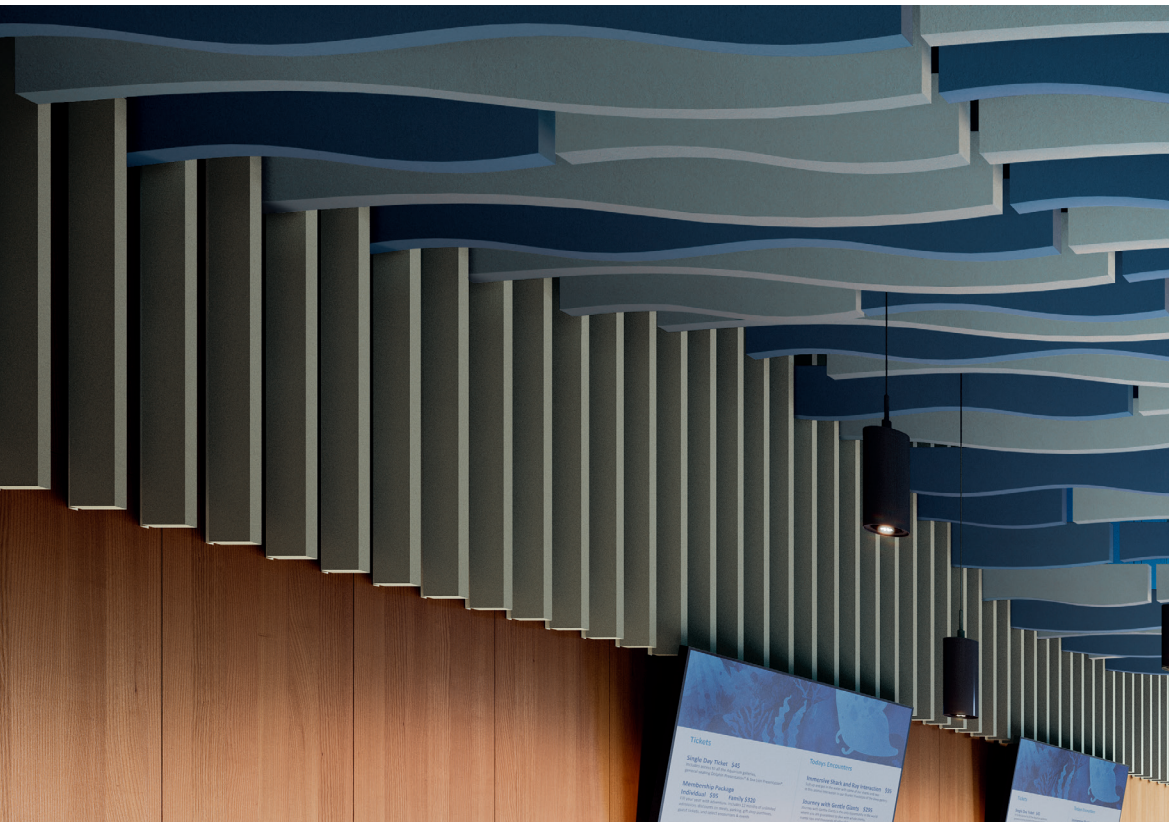

Ceiling application

SoundScapes® Blades wall panels in Riverstone (DRV), and SoundScapes Blades wave designs in Mist (DMT) and Rainstorm (DRS)


Linear acoustical panels help reduce reverberation time in your space.

KEY SELECTION ATTRIBUTES

- new Now available in 15 colors inspired by nature
- Direct attach to wall using Axiom® Wall Molding
- White embedded hanging clips
- Sound absorption up to 0.80 NRC dependent on blade spacing
- Custom panel options available
- Select products included in the FAST134 program – ready to ship in 4 weeks or less. See up-to-date lead times at armstrongceilings.com/fast134
- Made in the U.S.A. of domestic and global content
- Build America, Buy America (BABA) Act compliant

COLORS Due to printing limitations, shade may vary from actual product.

new Painted

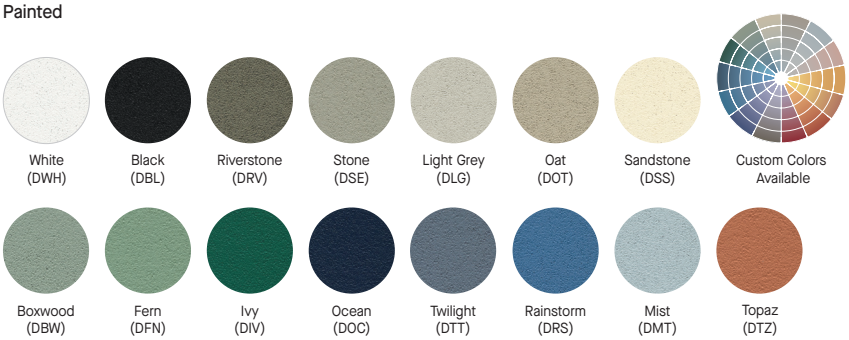

For premium and custom capabilities, contact ASQuote@armstrongceilings.com



Wood Looks Available!

TechLine 877 276-7876
armstrongceilings.com/soundscapesblades

Armstrong® World Industries

SOUNDSCAPES® Blades



Linear Acoustical Wall Panels
fine texture

RECYCLED CONTENT
UP TO 43%

LEED V5
COMMON MATERIALS FRAMEWORK
Climate Health
Human Health
Ecosystem Health
Circular Economy ✓
OCCUPANT EXPERIENCE
Acoustics ✓

VISUAL SELECTION Shown in elevation view

PERFORMANCE Dots represent high level of performance.

	Item No.◆	Description	Dimensions (Inches)	Light Reflect (White only)	Fire Rating	Anti-Mold/ Mildew (Bio-Block®)	Sag Resist (Humi-Guard+)	Fog (CleanAssure™ Disinfectable Panels)	Spray (DURABILITY)	Wash	Soil	Impact
SOUNDSCAPES® Blades	**8250F03RH05_ _ _** (formerly item no. 7190)	Rectangular Vertical Panel	5 × 46 × 2" 	0.88 •	Class A	•	•	•	•	•	•	•
	8250F03RH06_ _ _ (formerly item no. 7191)	Rectangular Vertical Panel	5 × 94 × 2" 	0.88 •	Class A	•	•	•	•	•	•	•

FAST134 program items ready to ship from manufacturer in 4 weeks or less.
Up-to-date lead times and product options (sizes and colors) at armstrongceilings.com/fast134

NOTE: Scrimmed top edges offered as "Premium."
◆ Add 3-letter color suffix to end of item number (e.g., 8250F03RH05 D W H = White)

ACOUSTIC INFORMATION


Panel Depth	6" O.C.	12" O.C.	18" O.C.	24" O.C.
5"	0.80	0.50	0.40	0.30

NOTE: Tested per ASTM C423 without infill panels. Spacing of blades, blade depth, and acoustical infill panels will impact acoustical performance. Contact TechLine for a custom reverberation time report at techline@armstrongceilings.com


INSTALLATION OPTIONS

	Item No.◆	Description	PCS/ CTN	
Direct-Attach with Axiom® Wall Molding	**AXM34STR3 _ _**	10' Straight Wall Molding	(360° Paint Recommended; order by the piece)	

◆ When specifying or ordering items with a color, add the two-letter suffix to the end of the item number (e.g. AXM34STR3 B L)



Direct-attach Method using Axiom® Wall Molding



PHYSICAL DATA

Material
2" thick fiberglass with DuraBrite® scrim on face and sides.

Surface Finish
Colors: DuraBrite scrim with factory-applied paint on face and sides. Standard White has energy-saving, high light-reflective finish (LR 0.88). Top of panel is unfinished with white embedded hanging clips.

Fire Performance
SoundScapes® Blades panel material is ASTM E84 Class A: Flame Spread 25 or under and Smoke Developed 50 or less.

CAN/ULC S102 surface burning characteristics. Flame Spread Rating 25 or less. Smoke Developed Classification 50 or less.

Design Support
For custom design assistance contact ProjectWorks® Design Services or visit armstrongceilings.com/projectworks

Anti-Mold/Mildew
Ceiling tiles with BioBlock® performance resist the growth of mold and mildew on the tile surface.

Design Considerations
SoundScapes Blades panels maintain a natural bow that may be noticeable when installed 2" or less apart.

Special care in installation and handling must be taken with color panels to avoid surface damage to the paint finish. Custom colors are available.

5" SoundScapes Blades can now be used on walls, but are not recommended for use in high-traffic or high-impact areas. For best results, install above 7' from floor level.

SoundScapes Blades panels can be ordered with scrim on top edge as a premium.

Seismic Restraint
SoundScapes Blades are approved for all seismic areas when installed per the seismic guidelines in the Armstrong Ceilings installation instructions.

FAST134 Program Considerations
Size of Job Matters: Big jobs, over 2500 SF or 50 pieces for shapes/vertical elements will have longer lead times.

Location Matters: Transit time not included. We are ready to ship in 1 week on FAST1 items. However, transit to the states west of Wyoming may add time.

Distributor Truck Schedule Matters: We rely on distribution to help move products around the country. When speed matters, work with your local distributor to ensure FAST134 service.

Stock vs Made-to-Order Matters: FAST3 & FAST4 items are made-to-order and will ship direct to distributor. FAST1 (stocked items) will go through distribution and depend on distributor truck schedules.

Warranty
Details at armstrongceilings.com/warranty

Panel Weight
8250F03RH05 – 2.2 LBS per panel
8250F03RH06 – 4.3 LBS per panel

Panels/Carton
4

Minimum Order Quantity
1 carton

TechLine / 1 877 276-7876
armstrongceilings.com/soundscapesblades
BPCS-6477-925

LEED® is a registered trademark of the U.S. Green Building Council; Living Building Challenge® (LBC) is a registered trademark of the International Living Future Institute®; WELL™ and WELL Building Standard™ are trademarks of the International WELL Building Institute; Revit® is a registered trademark of Autodesk, Inc. all other trademarks used herein are the property of AWI Licensing LLC and/or its affiliates © 2025 AWI Licensing LLC

Armstrong® World Industries