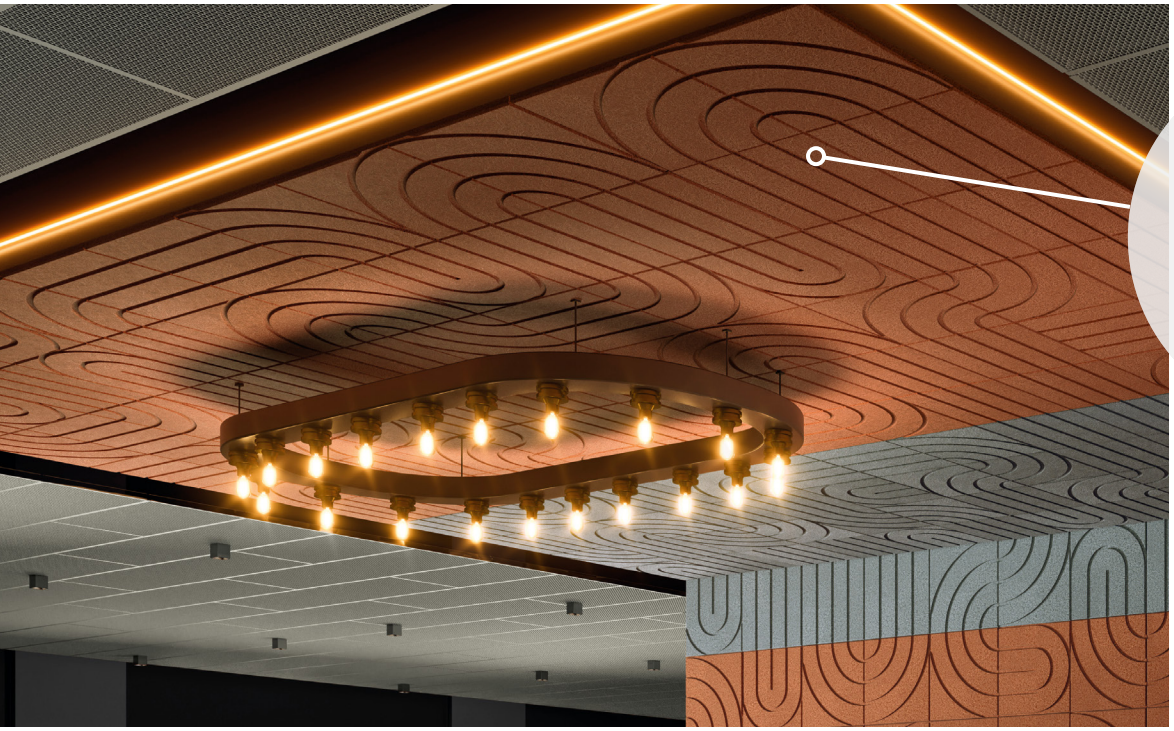
TECTUM® DesignArt® – Lines Finale™ PB

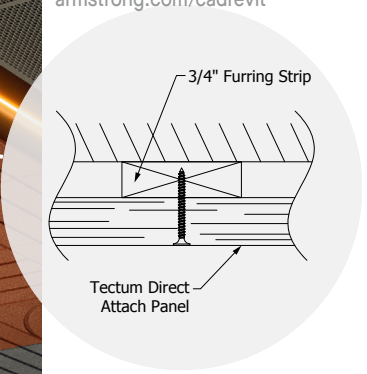
with Plant-based Binder Infill
Direct-Attach Ceiling Panels
coarse texture

SUSTAIN®
High Performance
Sustainable
Ceiling Systems



Tectum DesignArt – Lines Finale PB Rings, Arcs, Bands ceiling and wall panels in Polar, Marigold, Topaz, and Mist; MetalWorks™ Mesh Twin Circle design in Gun Metal Grey

CAD/Revit® drawings at:
armstrong.com/cadrevit



Visit our online pattern gallery at:
armstrong.com/patterngallery

Mix and match Shapes and Lines for a truly unique visual!



armstrong.com/designart

Integrated furring strips and an acoustical infill reduce installation time and offer excellent sound absorption with one-of-a-kind visuals.

KEY SELECTION ATTRIBUTES

- Tectum® DesignArt® – Lines Finale™ PB panels have UL® Certified acoustics with acoustical testing and reporting that align with industry-wide best practices
- Excellent sound absorption – NRC 0.85 (1" panel, D-20 mounting)
- Panels are manufactured with a plant-based binder infill and furring pieces to provide maximum sound control and install 2.5x faster than Direct-Attach for the same acoustic performance
- 29 standard routed panels for 24" × 24" and 24" × 48" Direct-Attach ceilings are available in 24 nature-inspired colors and Natural
- Products in the Tectum DesignArt portfolio are made to work together
- Precision routing of lines allows for seamless connections between compatible panel face designs
- Great retrofit solution for noise reduction
- CleanAssure™ family of products – includes disinfectable panels, suspension systems, and trim (standard colors only)
- Part of the Sustain® portfolio, and meeting the most stringent industry sustainability compliance standards today
- All panel edges and furring strips are painted; top face panel features beveled edges
- Variety of made-to-order color options available
- Touch up paint available for the 24 standard colors
- Available for wall applications
- Panels can be mechanically fastened to a wide variety of surfaces including masonry, drywall, drywall grid system, wood, and more
- USDA Biobased content: 98%
- Made in the U.S.A. of domestic and global content
- Build America, Buy America (BABA) Act compliant

DETAILS





1. Panel face with beveled and painted edges
2. Back of panel with factory-applied furring strips and acoustical infill

TechLine 877 276-7876
armstrong.com/designart

Armstrong®
World Industries

TECTUM® DesignArt® – Lines Finale™ PB

with Plant-based Binder Infill
Direct-Attach Ceiling Panels
coarse texture

FSC www.fsc.org FSC® C007626
The mark of responsible forestry

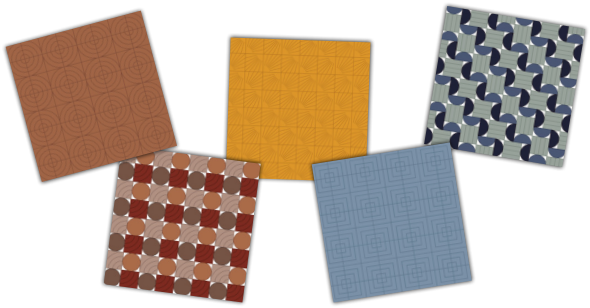
SUSTAIN® High Performance Sustainable Ceiling Systems

USDA CERTIFIED BIOBASED PRODUCT PRODUCT 98%

Declare.

LEED V5

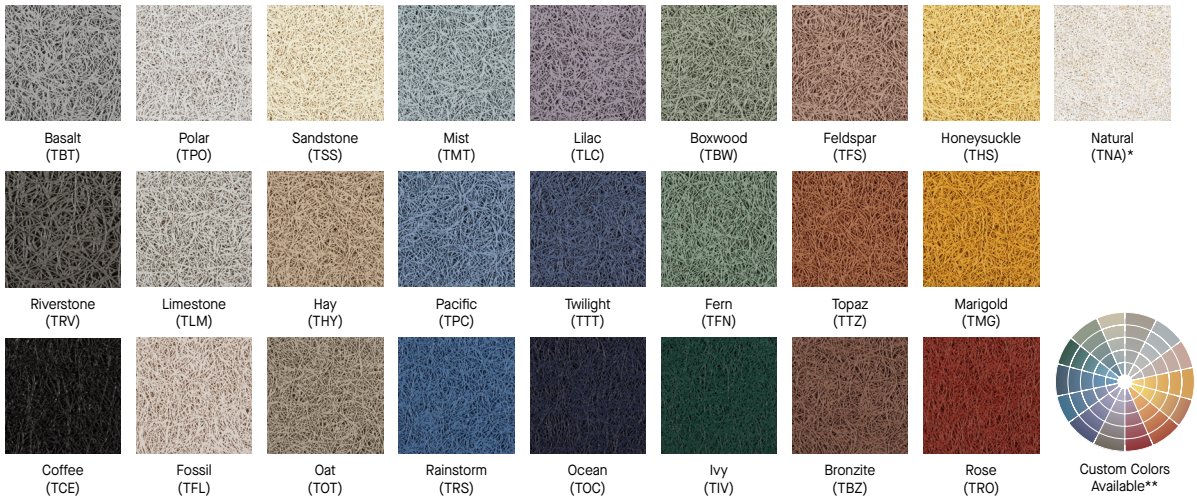
COMMON MATERIALS FRAMEWORK		Climate Health	EPD
Human Health	Declare Label	Ecosystem Health	EPD
	HPD		FSC
	3rd Party CDPH	Circular Economy	✓
OCCUPANT EXPERIENCE		Acoustics	✓



Visit our online pattern gallery at
armstrong.com/patterngallery

Use our recommended colors, or choose from 24 standard colors, in addition to Natural to create your own one-of-a-kind pattern!

COLORS Due to printing limitations, shade may vary from actual product.



Basalt (TBT) · Polar (TPO) · Sandstone (TSS) · Mist (TMT) · Lilac (TLC) · Boxwood (TBW) · Feldspar (TFS) · Honeysuckle (THS) · Natural (TNA)*

Riverstone (TRV) · Limestone (TLM) · Hay (THY) · Pacific (TPC) · Twilight (TTT) · Fern (TFN) · Topaz (TTZ) · Marigold (TMG)

Coffee (TCE) · Fossil (TFL) · Oat (TOT) · Rainstorm (TRS) · Ocean (TOC) · Ivy (TIV) · Bronzite (TBZ) · Rose (TRO)

Custom Colors Available**

* Due to manufacturing processes, the face of Natural (TNA) panels may appear whiter than the back, edges, and rout lines.
** All colors shown are pre-qualified to meet Sustain® portfolio requirements. Custom, made-to-order colors must be evaluated if sustainability criteria is required. Lead time will increase. Contact ASQuote@armstrong.com

VISUAL SELECTION

	Item No.	Dimensions W × L × H (Inches)
TECTUM® DesignArt® – Lines Finale™ PB Long Edges Beveled/ Short Edges Beveled	See next page	24 × 24 × 1" ☐ 24 × 48 × 1" ▭

PERFORMANCE Dots represent high level of performance.

	Fire Rating	Bio-Block Anti-Mold/ Mildew	Humi-Guard+ Sag Resist	Certified Low VOC Emissions	CleanAssure™ Disinfectable Panels Fog	DURABILITY Impact	30-Yr Warranty
	Class A	•	•	•	•	•	•

ACOUSTICAL INFORMATION

Panel Thickness	UL® Classified Acoustics NRC	Mounting Method
1" with plant-based binder infill & 1" furring	0.80 •	A
	0.85 •	D-20

DIRECT-TO-STRUCTURE – Standard

TECTUM® DesignArt® – Lines Finale™ PB

with Plant-based Binder Infill
Direct-Attach Ceiling Panels
coarse texture

FSC www.fsc.org FSC® C007626 The mark of responsible forestry

SUSTAIN® High Performance Sustainable Ceiling Systems

USDA CERTIFIED BIOBASED PRODUCT PRODUCT 98%

Declare.


LEED V5

COMMON MATERIALS FRAMEWORK		Climate Health	EPD
Human Health	Declare Label	Ecosystem Health	EPD
	HPD		FSC
	3rd Party CDPH	Circular Economy	✓
OCCUPANT EXPERIENCE		Acoustics	✓


DIRECT-TO-STRUCTURE – Standard


FACE PROFILES


The drawings below show the face profile of each panel. When specifying or ordering directional designs like Retro or Tilts, note that the designs are opposite of their appearance with a reflected view.



Currents
6383D11T10 _ _ _◆



Rings
6383D04T10 _ _ _◆



Arcs
6383D03T10 _ _ _◆



Bands
6383D08T10 _ _ _◆



Steps
6383D07T10 _ _ _◆



Illusions
6383D09T10 _ _ _◆



Currents B
6383D49T10 _ _ _◆



Rings B
6383D45T10 _ _ _◆



Retro
6383D43T10 _ _ _◆



Retro B
6383D44T10 _ _ _◆



Bands B
6383D46T10 _ _ _◆



Bands C
6383D47T10 _ _ _◆



Illusions B
6383D48T10 _ _ _◆



Droplets
6383D13T10 _ _ _◆



Tilts
6383D15T10 _ _ _◆



Decos
6383D10T10 _ _ _◆



Signals
6383D14T10 _ _ _◆



Strings
6383D12T10 _ _ _◆



Droplets B
6383D51T10 _ _ _◆



Contours
6383D53T10 _ _ _◆



Tilts B
6383D40T10 _ _ _◆



Tilts C
6383D41T10 _ _ _◆

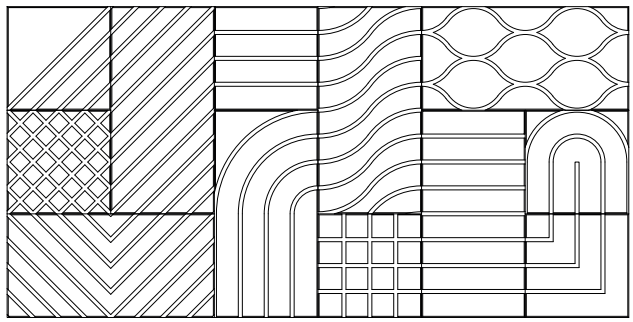

Tilts D
6383D42T10 _ _ _◆



Signals B
6383D52T10 _ _ _◆



Strings B
6383D50T10 _ _ _◆


Hatches
6383D01T10 _ _ _◆


Checkers
6383D06T10 _ _ _◆


Precision Routing Allows for Mixing and Matching


Rays
6383D05T10 _ _ _◆


Levels
6383D54T10 _ _ _◆

◆ When specifying or ordering, include the appropriate 3-digit color suffix TNA = Natural; TPO = Polar (e.g. 6383D54T10 T P O).

TechLine 877 276-7876
armstrong.com/designart

Armstrong® World Industries

TECTUM® DesignArt® – Lines Finale™ PB

with Plant-based Binder Infill
Direct-Attach Ceiling Panels
coarse texture

SYSTEM INSTALLATION DETAILS

FSC www.fsc.org FSC® C007626 The mark of responsible forestry

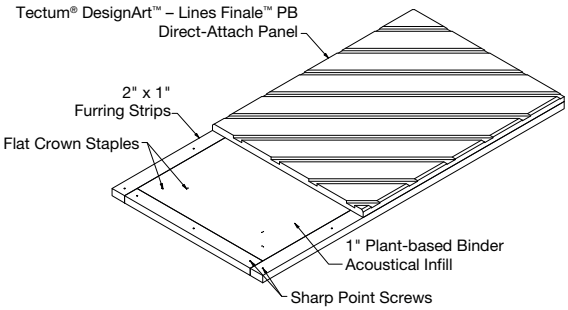
SUSTAIN® High Performance Sustainable Ceiling Systems


USDA CERTIFIED BIOBASED PRODUCT PRODUCT 98%

Declare.

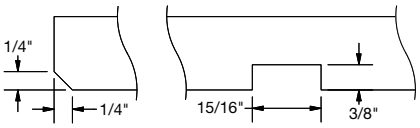
LEED V5

COMMON MATERIALS FRAMEWORK		Climate Health	EPD
Human Health	Declare Label	Ecosystem Health	EPD
	HPD		FSC
	3rd Party CDPH	Circular Economy	✓
OCCUPANT EXPERIENCE		Acoustics	✓

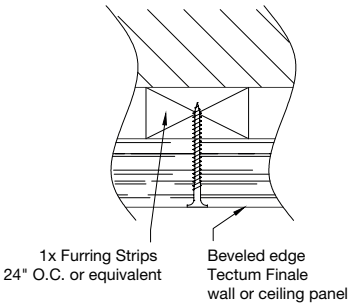




1 Panel Construction



2 Routing for Lines with Beveled Edge



3 Acoustical Mounting Methods

ACCESSORIES

Item No. ◆	Description	Quantity
5456GAL1 _ _ _	Touch up paint	1 gallon
8187L30TWH†	#8 × 3" Painted Head – Sharp point Screws	1000/CTN
8188L30TWH†	#8 × 3" Painted Head – Drill point Screws	1000/CTN
8189L32TWH	3-1/4" Painted Head – CMU Screws	500/CTN

◆ When specifying or ordering, include the appropriate 3-digit color suffix TNA = Natural; TPO = Polar (e.g. 5456GAL1 T P O). Consult installation instructions for fastener guidance.
† Touch up paint is available to paint screw heads in field if desired or specified.
NOTE: Projects may require alternative screw lengths and types depending on site conditions. Please consult installation instructions for guidance.

PHYSICAL DATA

Material
Cementitious wood fiber panels with a fiberglass plant-based binder infill.; FSC® certified. For more information about FSC-certified fire-retardant products, or to view our FSC-certification letter, contact TechLine at 1 877 276-7876.

Surface Finish
Factory-applied latex paint on abuse-resistant silicate surface coating. Natural finish is unpainted but, after coating is applied, panels may appear light in color.

Panels are painted on the edge, however due to fibrous texture of panels, certain angles and lighting conditions will make edge appear less or more painted.

Can be field painted up to 6 times without impacting acoustic or fire performance. See installation instructions for details on paint and application method.

Fire Performance
Class A. Flame Spread Index 25 or less and Smoke Developed Index 50 or less when tested in accordance with ASTM E84.

CAN/ULC S102 surface burning characteristics. Flame Spread Index of 25 or less and Smoke Developed Index of 50 or less (painted, face only).

VOC Emissions
Third-party certified compliant with California Department of Public Health CDPH/EHLB/Standard Method Version 1.2, 2017. This standard is the guideline for low emissions in LEED®, WELL Building Standard™, CalGreen Title 24, ANSI/ASHRAE/USGBC/IES Standard 189; ANSI/GBI Green Building Assessment Protocol.

Humidity/Sag Resistance
HumiGuard® Plus performance panels are recommended for areas subject to high humidity, up to, but not including, standing water and outdoor applications.

Anti-Mold/Mildew
Ceiling panels with BioBlock® performance resist the growth of mold and mildew on the panel surface.

Installation Considerations
Panels must be mechanically attached to approved substrate per installation instructions. Acoustical performance varies by mounting method; panels must be installed as directed to achieve published NRC values.

Use caution and wear appropriate hand, eye, and dust mask protection when cutting and installing Tectum ceiling panels. Refer to installation instructions for complete details and cutting recommendations.

Primary (Embodied) Energy
See all LCA information on our EPDs.

Application Considerations
Low angle lighting exaggerates variation inherent to the manufacturing process and is not recommended for Tectum installations.

Design Considerations
Color variation among panels is common due to the natural characteristics of the wood.

Wood fibers may appear orange on natural-colored panels due to the characteristics of the wood.

Physical product samples for standard and custom colors are available upon request. Please refer to the physical product sample prior to making a final selection. While we strive to ensure exact color matches, various factors such as differences in materials, texture, substrate porosity, painting processes, lighting, and observer subjectivity can all affect how paint colors appear on ceiling and wall panels, suspension systems, and trim products. Due to these and other differences, ceiling and wall panels, trim products, and suspension systems with the same color name will coordinate but may not be an exact color match. Product is dye-lotted. Order sufficient initial quantities and attic stock to minimize possible color variation.

Seismic Restraint
Tectum Direct-Attach ceiling panels are approved for application in all seismic areas when installed per the seismic guidelines in the Armstrong Ceiling and Wall Installation Instructions.

Design & Pre-Construction Service
For complimentary design and pre-construction assistance, contact ProjectWorks® or visit armstrong.com/projectworks

Cleaning and Disinfecting
Cleaning and CDC-approved disinfecting options available on armstrong.com/cleaning

Warranty
30-Year Warranty. Details at armstrong.com/warranty

Weights and Sold By
1" – 3.1 LBS/SF
Panels sold by the piece. Other accessory elements quantities noted above.

LEED® is a registered trademark of the U.S. Green Building Council; Declare® and Living Building Challenge® (LBC) are registered trademarks of the International Living Future Institute®; WELL™ and WELL Building Standard™ are trademarks of the International WELL Building Institute; FSC® is a registered trademark of Forest Stewardship Council®, A.C., license code FSC-C007626; Revit® is a registered trademark of Autodesk, Inc.; UL and UL Certified are registered trademarks of UL LLC; all other trademarks used herein are the property of AWI Licensing LLC and/or its affiliates © 2026 AWI Licensing LLC

TechLine / 1 877 276-7876
armstrong.com/designart

BPCS-7153-426

Armstrong® World Industries

DIRECT-TO-STRUCTURE – Standard