TECTUM® DesignArt® – Lines


Tegular
coarse texture

SUSTAIN®
High Performance
Sustainable
Ceiling Systems



Tectum DesignArt – Lines Tegular ceiling panels in patterns TDLI-0011, TDLI-0012, and TDLI-0013 in Polar and Twilight

CAD/Revit® drawings at:
armstrong.com/cadrevit



Visit our online pattern gallery at:
armstrong.com/patterngallery

Mix and match Shapes and Lines for a truly unique visual!



armstrong.com/designart

Transform interior spaces with a three-dimensional visual by combining texture, routed patterns, and colors with sustainable, acoustical Tectum® DesignArt® – Lines Tegular ceiling panels.

KEY SELECTION ATTRIBUTES

- 29 standard routed panels for 24" × 24" and 24" × 48" Tegular ceilings
- Available in 24 standard nature-inspired colors and Natural
- Precision routing of lines allows for seamless connections between compatible panel face designs
- Tectum DesignArt – Lines panels have UL® certified acoustics with testing and reporting that align with industry-wide best practices
- Color-coordinated suspension systems available
- CleanAssure™ family of products – includes disinfectable panels, suspension systems, and trim (standard colors only)
- Part of the Sustain® portfolio, and meeting the most stringent industry sustainability compliance standards today
- Touch up paint for 24 standard colors available
- Mold- and mildew-resistant surface
- Durable for heavy-use interiors
- All edges are painted
- USDA Biobased content: 98%
- Made in the U.S.A. of domestic and global content
- Build America, Buy America (BABA) Act compliant

DETAIL



Tectum DesignArt – Lines tegular panel. All edges are painted.



Available in High NRC with proprietary acoustical backer!

TechLine 877 276-7876
armstrong.com/designart

Armstrong®
World Industries

TECTUM® DesignArt® – Lines

Tegular
coarse texture

USDA CERTIFIED BIOBASED PRODUCT
PRODUCT 98%

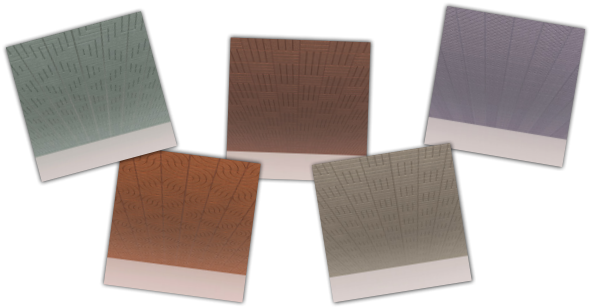
FSC www.fsc.org FSC® C007626 The mark of responsible forestry

SUSTAIN® High Performance Sustainable Ceiling Systems

Declare.

LEED V5


COMMON MATERIALS FRAMEWORK		Climate Health	EPD
Human Health	Declare Label	Ecosystem Health	EPD
	HPD		FSC®
	3rd Party CDPH	Circular Economy	✓
OCCUPANT EXPERIENCE		Acoustics	✓




Visit our online pattern gallery at
armstrong.com/patterngallery


Use our recommended colors, or choose from 24 standard colors, in addition to Natural to create your own one-of-a-kind pattern!


COLORS Due to printing limitations, shade may vary from actual product.



Basalt (TBT)



Polar (TPO)


Sandstone (TSS)


Mist (TMT)



Lilac (TLC)



Boxwood (TBW)


Feldspar (TFS)



Honeysuckle (THS)



Natural (TNA)*



Riverstone (TRV)



Limestone (TLM)


Hay (THY)


Pacific (TPC)



Twilight (TTT)



Fern (TFN)



Topaz (TTZ)



Marigold (TMG)


Coffee (TCE)



Fossil (TFL)



Oat (TOT)


Rainstorm (TRS)


Ocean (TOC)


Ivy (TIV)


Bronzite (TBZ)


Rose (TRO)


Custom Colors Available**

* Due to manufacturing processes, the face of Natural (TNA) panels may appear whiter than the back, edges, and rout lines.
** All colors shown are pre-qualified to meet Sustain® portfolio requirements. Custom, made-to-order colors must be evaluated if sustainability criteria is required. Lead time will increase. Contact ASQuote@armstrong.com

VISUAL SELECTION

	Item No.	Dimensions W × L × H (Inches)
TECTUM® DesignArt® – Lines 15/16" Square Tegular	See next page	24 × 24 × 1" ☐ 24 × 48 × 1" ▭

PERFORMANCE Dots represent high level of performance.

	Fire Rating	Anti-Mold/ Mildew (Bio-Block)	Sag Resist (Humi-Guard+)	Certified Low VOC Emissions	Fog (CleanAssure™ Disinfectable Panels)	Impact (DURABILITY)	30-Yr Warranty
							
Class A	•	•	•	•	•	•	•

ACOUSTICAL INFORMATION

Panel Thickness	Infill Panel Item No.	NRC	CAC
1"	N/A	0.40	N/A
1"	**1713**	0.90 •	30

TECTUM® WOOD FIBER – Standard

TECTUM® DesignArt® – Lines

Tegular
coarse texture

USDA CERTIFIED BIOBASED PRODUCT
PRODUCT 98%

FSC www.fsc.org FSC® C007626 The mark of responsible forestry

SUSTAIN® High Performance Sustainable Ceiling Systems

Declare.


LEED V5


COMMON MATERIALS FRAMEWORK		Climate Health	EPD
Human Health	Declare Label	Ecosystem Health	EPD
	HPD		FSC®
	3rd Party CDPH	Circular Economy	✓
OCCUPANT EXPERIENCE		Acoustics	✓


TECTUM® WOOD FIBER – Standard


FACE PROFILES


The drawings below show the face profile of each panel. When specifying or ordering directional designs like Retro or Tilts, note that the designs are opposite of their appearance with a reflected view.



Currents
8186D11T10 _ _ _◆



Rings
8186D04T10 _ _ _◆



Arcs
8186D03T10 _ _ _◆



Bands
8186D08T10 _ _ _◆



Steps
8186D07T10 _ _ _◆



Illusions
8186D09T10 _ _ _◆



Currents B
8186D49T10 _ _ _◆



Rings B
8186D45T10 _ _ _◆



Retro
8186D43T10 _ _ _◆



Retro B
8186D44T10 _ _ _◆



Bands B
8186D46T10 _ _ _◆



Bands C
8186D47T10 _ _ _◆



Illusions B
8186D48T10 _ _ _◆



Droplets
8186D13T10 _ _ _◆



Tilts
8186D15T10 _ _ _◆



Decos
8186D10T10 _ _ _◆



Signals
8186D14T10 _ _ _◆



Strings
8186D12T10 _ _ _◆



Droplets B
8186D51T10 _ _ _◆



Contours
8186D53T10 _ _ _◆



Tilts B
8186D40T10 _ _ _◆



Tilts C
8186D41T10 _ _ _◆

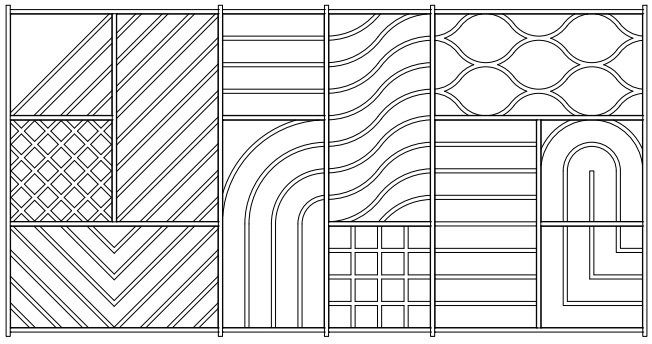

Tilts D
8186D42T10 _ _ _◆



Signals B
8186D52T10 _ _ _◆



Strings B
8186D50T10 _ _ _◆


Hatches
8186D01T10 _ _ _◆


Checkers
8186D06T10 _ _ _◆


Precision Routing Allows for Mixing and Matching


Rays
8186D05T10 _ _ _◆


Levels
8186D54T10 _ _ _◆

◆ When specifying or ordering, include the appropriate 3-digit color suffix TNA = Natural; TPO = Polar (e.g. 8186D42T10 T P O).

TechLine 877 276-7876
armstrong.com/designart

Armstrong® World Industries

TECTUM® DesignArt® – Lines

Tegular
coarse texture

USDA CERTIFIED BIOBASED PRODUCT
PRODUCT 98%

FSC www.fsc.org FSC® C007626
The mark of responsible forestry

SUSTAIN® High Performance Sustainable Ceiling Systems

Declare.

LEED V5


COMMON MATERIALS FRAMEWORK		Climate Health	EPD
Human Health	Declare Label	Ecosystem Health	EPD
	HPD		FSC®
	3rd Party CDPH	Circular Economy	✓
OCCUPANT EXPERIENCE		Acoustics	✓

SYSTEM INSTALLATION DETAILS

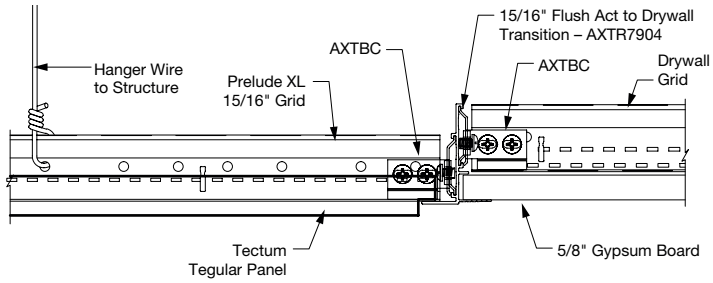
	Item No.	Description	Quantity
Suspension Systems	**7301 _ _ _†**	Prelude® XL® 15/16" 12' HD Main Beam	20 PCS/CTN
	XL7342 _ _ _†	Prelude 4' Cross Tee	60 PCS/CTN
	XL7328 _ _ _†	Prelude 2' Cross Tee	60 PCS/CTN
Wall-to-Wall	**7800 _ _ _†**	12' Hemmed Angle Molding	30 PCS/CTN
Floating Cloud Installations	**AX__STR____**	Axiom® Classic Straight Perimeter Trim	Per piece
Other Accessories	**5456GAL1 _ _ _**	Touch up paint††	1 gallon
	8178T10	Tectum® Hold-down Clip†††	200 PCS/CTN

† 15/16" Prelude XL Suspension System available in coordinating colors to Tectum DesignArt. For the appropriate 3-digit color suffix, please visit armstrongceilings.com/preludexl
†† When specifying or ordering, include the appropriate 3-digit color suffix TNA = Natural; TPO = Polar (e.g. 5456GAL1 T P O). Consult installation instructions for fastener guidance.
††† Tectum hold-down clip should be used in high impact spaces (such as gymnasiums) and will limit accessibility. One clip is required for each 2' × 2' panel and 2 clips are required for each 2' × 4' panel.

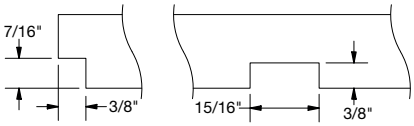
SYSTEM INSTALLATION DETAILS



1 Discontinuous system using Axiom trim solutions



2 Transitions with Axiom



3 Routing for Lines with Tegular Edge

ACOUSTICAL INFILL PANELS

Item No.	Description	Dimensions	Color	PCS/CTN
1713	School Zone® Fine Fissured Lay-in Acoustical Panel	24 × 24 × 3/4"	White	12

PHYSICAL DATA

Material
FSC® certified (FSC® C007626)

Cementitious Wood Fiber; FSC® certified. For more information about FSC-certified fire-retardant products, or to view our FSC certification letter, contact TechLine at 1 877 276 7876.

Surface Finish
Factory-applied latex paint on abuse-resistant silicate surface coating. Natural finish is unpainted, but after the coating is applied, panels may appear light in color.

Panels are painted on the edge, however due to fibrous texture of panels, certain angles and lighting conditions will make edge appear less or more painted.

Can be field painted up to 6 times without impacting acoustic or fire performance. See installation instructions for details on paint and application method.

Fire Performance
Class A. Flame Spread Index 25 or less and Smoke Developed Index 50 or less when tested in accordance with ASTM E84.

CAN/ULC S102 surface burning characteristics. Flame Spread Index of 25 or less and Smoke Developed Index of 50 or less (painted, face only).

Humidity/Sag Resistance
HumiGuard® Plus panels are recommended for areas subject to high humidity, up to, but not including, standing water and outdoor applications.

Anti-Mold/Mildew
Ceiling panels with BioBlock® performance resist the growth of mold and mildew on the panel surface.

VOC Emissions
Third-party certified compliant with California Department of Public Health CDPH/EHLB/Standard Method Version 1.2, 2017. This standard is the guideline for low emissions in LEED®, WELL Building Standard™, CalGreen Title 24, ANSI/ASHRAE/USGBC/IES Standard 189; ANSI/GBI Green Building Assessment Protocol.

Primary (Embodied) Energy
See all LCA information on our EPDs.

Application Considerations
Low angle lighting exaggerates variation inherent to the manufacturing process and is not recommended for Tectum installations.

Design Considerations
Color variation among panels is common due to the natural characteristics of the wood.

Wood fibers may appear orange on natural-colored panels due to the characteristics of the wood.

Physical product samples for standard and custom colors are available upon request. Please refer to the physical product sample prior to making a final selection. While we strive to ensure exact color matches, various factors such as differences in materials, texture, substrate porosity, painting processes, lighting, and observer subjectivity can all affect how paint colors appear on ceiling and wall panels, suspension systems, and trim products. Due to these and other differences, ceiling and wall panels, trim products, and suspension systems with the same color name will coordinate but may not be an exact color match. Product is dye-lotted. Order sufficient initial quantities and attic stock to minimize possible color variation.

Installation Considerations
Use caution and wear appropriate hand, eye, and dust mask protection when cutting and installing Tectum panels. Refer to installation instructions for complete details and cutting recommendations.

Seismic Restraint
Tectum Tegular panels are approved for application in all seismic areas when installed per the Armstrong® installation instructions.

Design & Pre-Construction Service
For complimentary design and pre-construction assistance, contact ProjectWorks® or visit armstrong.com/projectworks

Cleaning and Disinfecting
Cleaning and CDC-recommended disinfecting options available on armstrong.com/cleaning

Warranty
30-Year Performance Guarantee & Warranty when installed with an Armstrong suspension system. Details at armstrong.com/warranty

Weight; Square Feet/Carton
1" – 1.65 LBS/SF
Panels sold by the carton (8 PCS/CTN). Other accessories and suspension elements quantities noted above.

TechLine / 877 276-7876
armstrong.com/designart
BPCS-6641-526

LEED® is a registered trademark of the U.S. Green Building Council; Declare® is a registered trademark of the International Living Future Institute®; WELL™ and WELL Building Standard™ are trademarks of the International WELL Building Institute; FSC® is a registered trademark of Forest Stewardship Council®, A.C., license code FSC-C007626; Revit® is a registered trademark of Autodesk, Inc.; UL is a registered trademarks of UL LLC; all other trademarks used herein are the property of AWI Licensing LLC and/or its affiliates © 2026 AWI Licensing LLC

Armstrong® World Industries