
WOODWORKS® Channeled

Vector®



WoodWorks® Channeled – Vector® panels in Natural Variations Light Cherry

CAD/Revit® drawings at:
armstrongceilings.com/cadrevit

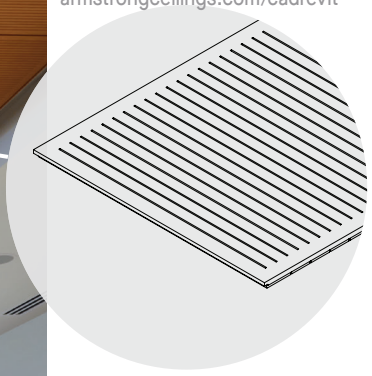

plus capabilities to do more



armstrongceilings.com/capabilities
See more photos at:
armstrongceilings.com/photogallery


These FSC® certified ceiling panels are available in rich, real wood veneers.

KEY SELECTION ATTRIBUTES

- Real wood veneers
- Create a continuous ceiling, cloud, or ceiling-to-wall transition
- Acoustical backing improves sound quality
- Shorter lead times and lower costs than custom millwork
- Class A fire performance
- FSC Chain of Custody (CoC) certified WoodWorks® products (FSC® C007626) represent responsible production and consumption practices from the forest to the consumer
- BioAcoustic™ infill panels can enhance acoustics and contribute to LEED® credits
- Made in the U.S.A. of domestic and global content
- Build America, Buy America (BABA) Act compliant


VENEERS Due to printing limitations, shade may vary from actual product.

Natural Variations™
(Real Wood Veneers)



Maple (NMP) | Light Cherry (NLC) | Dark Cherry (NDC) | Custom Veneers and Finishes Available (extended lead times)

VENEER PERFORATION OPTIONS
(Actual 1:2 scale shown)

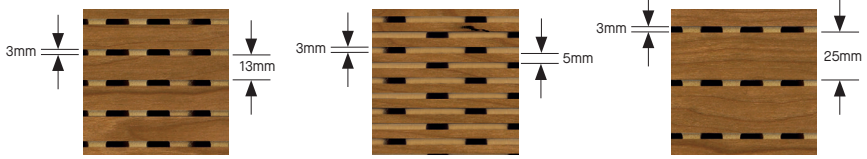

W7 (13mm profile with 3mm groove) | W8 (5mm profile with 3mm groove) | W9 (25mm profile with 3mm groove)

TechLine 877 276-7876
armstrongceilings.com/woodworkschanneled

Armstrong® World Industries

WOODWORKS® Channeled

Vector®

FSC www.fsc.org FSC® C007626
The mark of responsible forestry

RECYCLED CONTENT
UP TO **69%**

LEED V5

COMMON MATERIALS FRAMEWORK	Climate Health	EPD
	Human Health	EPD
		FSC®
3rd Party CDPH	Circular Economy	✓
OCCUPANT EXPERIENCE	Acoustics	✓

VISUAL SELECTION

Edge Profile	Item No.◆	Dimensions Nominal W x L x H (Inches) Custom Sizes Available	Perforations
FSC®-certified WOODWORKS® Channeled Vector® Panels with Perforated Veneers (with acoustical fleece)	**5903** _ _ _ _ _	24 × 24 × 3/4" ☐	W7, W8, W9
15/16" Vector 			

◆ When specifying or ordering, include the appropriate 2-letter perforation suffix and the veneer or finish suffix (e.g., 5903 W 7 N M P.)

PERFORMANCE


Fire Rating
Class A

ACOUSTICAL INFORMATION

Performance determined by perforation size.
Dots represent high level of performance.

Perforation		Infill Panel Item No.	NRC
W7 	13mm Profile Groove	**Panel only**	0.70
		8200T10	0.80
		1713BL	0.75
		2820BK	0.80
		5823	0.80
		5479	0.80
W8 	5mm Profile Groove	**Panel only**	0.75
		8200T10	0.80
		1713BL	0.75
		2820BK	0.80
		5823	0.85
		5479	0.85
W9 	25mm Profile Groove	**Panel only**	0.60
		8200T10	0.65
		1713BL	0.60
		2820BK	0.60
		5823	0.65
		5479	0.65

SUSPENSION SYSTEMS (Heavy-duty)

15/16" Vector 

Prelude® XL® HD

Prelude suspension system is available in many standard colors. All other suspension systems are available in standard White only. Other colors available as special order.

ACCESSORIES

Trim and infill panels are available. For more information go to: armstrongceilings.com/woodworksaccessories

PHYSICAL DATA

Material
FSC-certified fire-retardant medium-density fiberboard with face-cut veneers.

Surface Finish
Clear or tinted semi-gloss coating

Fire Performance
Class A: ASTM E84 surface burning characteristics. Flame Spread Index 25 or less. Smoke Developed Index 50 or less.

CAN/ULC S102 surface burning characteristics. Flame Spread Rating 25 or less. Smoke Developed Classification 50 or less.

ASTM E1264 Classification
Type XX - Fire Class A

Application Considerations
Variation among panels may occur due to the natural characteristics of the wood and grain.

It is very important that WoodWorks panels are climatized prior to installation. Relative humidity between 25% and 55%, and temperatures between 50°F and 86°F, must be maintained throughout the life of the product.

Design & Pre-Construction Service
For complimentary design and pre-construction assistance, contact ProjectWorks® or visit armstrongceilings.com/projectworks

Specification Consideration
Attention: For FSC-certified wood products to maintain their CoC certification, products must be sold to a CoC-certified distributor or directly to the installing contractor. Failure to do so breaks the CoC.

Seismic Restraint
WoodWorks Channeled wood panels have been engineered, tested, and approved in all seismic areas when installed per Armstrong Ceilings installation instructions.

Warranty
Details at armstrongceilings.com/warranty

Panel Weight
2.2 LBS/SF (Bulk packaged)

TechLine / 877 276-7876
armstrongceilings.com/woodworkschanneled
BPCS-5417-226

LEED® is a registered trademark of the U.S. Green Building Council; Living Building Challenge® (LBC) is a registered trademark of the International Living Future Institute®; WELL™ and WELL Building Standard™ are trademarks of the International WELL Building Institute; Revit® is a registered trademark of Autodesk, Inc.; FSC® is a registered trademark of Forest Stewardship Council®, A.C., license code FSC-C007626; all other trademarks used herein are the property of AWI Licensing LLC and/or its affiliates © 2026 AWI Licensing LLC

Armstrong® World Industries