WOODWORKS® Grille – Classics


Solid Wood Ceiling Panels

SUSTAIN®
High Performance Sustainable Ceiling Systems

FAST 4 WEEKS or Less
FAST134
Select Items Ship Fast
armstrongceilings.com/fast134



CAD/Revit® drawings at:
armstrong.com/cadrevit

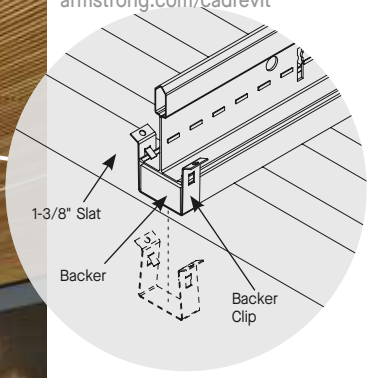

WoodWorks Grille – Classics panels in Golden Maple with Armstrong Integrated Lighting

These warm, natural wood ceilings offer installation flexibility and a variety of design options.

KEY SELECTION ATTRIBUTES

- 10 new standard finishes on solid poplar are tinted to replicate naturally occurring wood tones
- Panels are part of the Sustain® portfolio and meet the most stringent industry sustainability compliance standards today
- Coordinating solid wood trims in 4" and 6" depths
- The natural warmth of wood can contribute to biophilic designs and building certification standards like the WELL™ v2 "Nature and Place" feature
- Select products included in the FAST134 program – ready to ship in 4 weeks or less
- Installation with dowel or flat backer, or backer and dowel combination
- CleanAssure™ family of products – includes disinfectable panels, suspension systems, and trim
- Custom slat sizes and finishes available for every project
- Install in the ceiling, on the wall, or create ceiling-to-wall transitions
- FSC® Certified wood available as a premium quoted option (FSC-C007626)
- Made in the U.S.A. of domestic and global content
- Build America, Buy America (BABA) Act compliant

LIGHTING

- Simplify lighting coordination at every stage with Armstrong Integrated Lighting; Lights and pre-engineered grille panels are designed to work together for seamless specification and installation
- Downlighting solutions from USAI® Lighting sit perfectly flush with the panel face for a sleek visual
- Lighting solutions are engineered to be supported by standard Armstrong suspension systems



USAI DOWNLIGHTING: WoodWorks Grille – Classics panels with USAI® Micro™ downlight fixture. Integration details at armstrong.com/downlighting



ARMSTRONG® INTEGRATED LIGHTING: WoodWorks Grille – Classics panels in Natural Walnut with 1-1/2" linear light fixture. See lighting section for details.

TechLine 877 276-7876
armstrong.com/woodworksgrille

Armstrong® World Industries

WOODWORKS® Grille – Classics

Solid Wood Ceiling Panels

SUSTAIN®
High Performance
Sustainable Ceiling Systems

Declare.


LEED V5


COMMON MATERIALS FRAMEWORK		Climate Health	EPD
Human Health	Declare Label	Ecosystem Health	EPD
	HPD		
	3rd Party CDPH	Circular Economy	✓
OCCUPANT EXPERIENCE		Acoustics	✓

FINISH RANGES ON SOLID POPLAR

Our tinted finishes allow the natural character of the poplar to shine through. The images here reflect the visual range that is likely within our product. Installers will want to lay out panels before installing to achieve preferred aesthetic.


Bleached Grey (GBG)


Classic Grey (GCG)


Carbon Grey (GCB)


Rich Mahogany (GRY)


Antique Oak (GAO)


Red Oak (GRK)


English Chestnut (GEC)


Golden Maple (GGM)


Natural Walnut (GWN)


Warm Oak (GWO)


Forest Walnut (GFW)

CUSTOM FINISHES


Custom Wood
Species and Finishes
Available

Panel backers are black.
Made-to-order, custom
backer colors available.

LEGACY FINISHES


Maple (GMP)


Light Cherry (GLC)


Dark Cherry (GDC)

White (GWH)

Due to printing limitations, shade may vary from actual product.

TechLine 877 276-7876
armstrong.com/woodworksgrille

Armstrong®
World Industries

WOODWORKS® – Standard

WOODWORKS® Grille – Classics

Solid Wood Ceiling Panels

SUSTAIN®
High Performance
Sustainable Ceiling Systems


Declare.

LEED V5

COMMON MATERIALS FRAMEWORK		Climate Health	EPD
Human Health	Declare Label	Ecosystem Health	EPD
	HPD		
	3rd Party CDPH	Circular Economy	✓
OCCUPANT EXPERIENCE		Acoustics	✓

STANDARD PANEL CONFIGURATIONS

	1-1/4" SLAT WIDTH	1" SLAT WIDTH	5/8" SLAT WIDTH		
	3 Slats Per Panel	4 Slats Per Panel	5 Slats Per Panel	6 Slats Per Panel	8 Slats Per Panel
1-3/8" SLAT HEIGHT*				Item 7263_ _ _ _◆ Backer Only** or Dowel Only	Item 7264_ _ _ _◆ Backer Only** or Dowel Only
2-1/4" SLAT HEIGHT*		Item 7094_ _ _ _◆ Backer Only** or Dowel Only		Item 7265_ _ _ _◆ Backer Only** or Dowel Only	Item 7266_ _ _ _◆ Backer Only** or Dowel Only
3-1/4" SLAT HEIGHT	Item 7097_ _ _ _◆ Backer Only** or Dowel Only	Item 7095_ _ _ _◆ Backer Only** or Dowel Only	Item 7091_ _ _ _◆ Dowel Only or Backer & Dowel	Item 7092_ _ _ _◆ Dowel Only or Backer & Dowel	
4-1/4" SLAT HEIGHT	Item 7098_ _ _ _◆ Dowel Only or Backer & Dowel	Item 7096_ _ _ _◆ Dowel Only or Backer & Dowel	Item 7093_ _ _ _◆ Dowel Only or Backer & Dowel		
5-1/4" SLAT HEIGHT	Item 7099_ _ _ _◆ Dowel Only or Backer & Dowel				

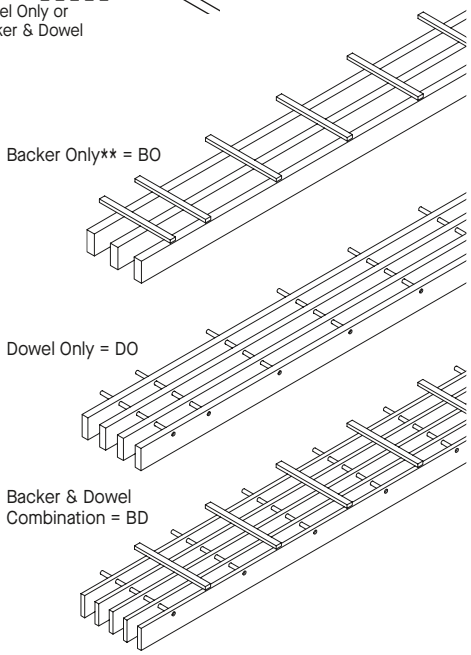

◆ When specifying or ordering please include the installation type and color suffixes (e.g., 7092 B D G L C – 6 slats 3-1/4" Backer & Dowel in Light Cherry).
* Panel configurations with slats less than 2-1/4" tall are approved for use on walls.
** Backer Only panels are compatible with Armstrong Integrated Lighting. See lighting pages for details.

TechLine 877 276-7876
armstrong.com/woodworksgrille

Armstrong®
World Industries

WOODWORKS® – Standard

WOODWORKS® Grille – Classics

Solid Wood Ceiling Panels

SUSTAIN® High Performance Sustainable Ceiling Systems

Declare.

LEED V5

COMMON MATERIALS FRAMEWORK		Climate Health	EPD
Human Health	Declare Label	Ecosystem Health	EPD
	HPD		
	3rd Party CDPH	Circular Economy	✓
OCCUPANT EXPERIENCE		Acoustics	✓

VISUAL SELECTION

Armstrong® Integrated Lighting is available for Backer Only panels. See lighting page for details.

PERFORMANCE

	Item No. ◆	Dimensions Nominal W × L × H* (Inches)	Custom Slat Sizes Available			Slat Spacing (Nominal)	LBS/SF	% Open Area	CleanAssure™ Disinfectable Panels: Fog	Spray	Wipe
WOODWORKS® Grille – Classics Backer, Dowel, and Backer & Dowel Combination	**7263BO _ _ _** **7263DO _ _ _**	12 × 96 × 1-7/8" Backer Only 12 × 96 × 1-3/8" Dowel Only	5/8" W	1-3/8" H	6 slats	1-3/8"	1.29 1.21	69%	•	•	•
	7264BO_ _ _ **7264DO_ _ _**	12 × 96 × 1-7/8" Backer Only 12 × 96 × 1-3/8" Dowel Only	5/8" W	1-3/8" H	8 slats	7/8"	1.68 1.59	58%	•	•	•
	7265BO _ _ _ **7265DO _ _ _**	12 × 96 × 2-3/4" Backer Only 12 × 96 × 2-1/4" Dowel Only	5/8" W	2-1/4" H	6 slats	1-3/8"	2.03 1.95	69%	•	•	•
	7266BO _ _ _ **7266DO _ _ _**	12 × 96 × 2-3/4" Backer Only 12 × 96 × 2-1/4" Dowel Only	5/8" W	2-1/4" H	8 slats	7/8"	2.67 2.58	58%	•	•	•
	7091BD _ _ _ **7091DO _ _ _**	12 × 96 × 3-3/4" Backer & Dowel 12 × 96 × 3-1/4" Dowel Only	5/8" W	3-1/4" H	5 slats	1-3/4"	2.43 2.34	74%	•	•	•
	7092BD _ _ _ **7092DO _ _ _**	12 × 96 × 3-3/4" Backer & Dowel 12 × 96 × 3-1/4" Dowel Only	5/8" W	3-1/4" H	6 slats	1-3/8"	2.89 2.80	58%	•	•	•
	7093BD _ _ _ **7093DO _ _ _**	12 × 96 × 4-3/4" Backer & Dowel 12 × 96 × 4-1/4" Dowel Only	5/8" W	4-1/4" H	5 slats	1-3/4"	3.14 3.05	74%	•	•	•
	7094BO _ _ _ **7094DO _ _ _**	12 × 96 × 2-3/4" Backer Only 12 × 96 × 2-1/4" Dowel Only	1" W	2-1/4" H	4 slats	2"	2.16 2.08	67%	•	•	•
	7095BO _ _ _ **7095DO _ _ _**	12 × 96 × 3-3/4" Backer Only 12 × 96 × 3-1/4" Dowel Only	1" W	3-1/4" H	4 slats	2"	3.07 2.98	67%	•	•	•
	7096BD _ _ _ **7096DO _ _ _**	12 × 96 × 4-3/4" Backer & Dowel 12 × 96 × 4-1/4" Dowel Only	1" W	4-1/4" H	4 slats	2"	3.98 3.89	67%	•	•	•
	7097BO _ _ _ **7097DO _ _ _**	12 × 96 × 3-3/4" Backer Only 12 × 96 × 3-1/4" Dowel Only	1-1/4" W	3-1/4" H	3 slats	2-3/4"	2.88 2.80	69%	•	•	•
	7098BD _ _ _ **7098DO _ _ _**	12 × 96 × 4-3/4" Backer & Dowel 12 × 96 × 4-1/4" Dowel Only	1-1/4" W	4-1/4" H	3 slats	2-3/4"	3.74 3.65	69%	•	•	•
	7099BD _ _ _ **7099DO _ _ _**	12 × 96 × 5-3/4" Backer & Dowel 12 × 96 × 5-1/4" Dowel Only	1-1/4" W	5-1/4" H	3 slats	2-3/4"	4.59 4.50	69%	•	•	•

FAST 4 WEEKS or Less


FAST134 program items ready to ship from manufacturer in 4 weeks or less.
Up-to-date lead times and product options (sizes and colors) at armstrong.com/fast134

◆ When specifying or ordering please include the installation type and color suffixes (e.g., 7092 B D G L C – 6 slats 3-1/4" Backer & Dowel in Light Cherry). Installation suffixes: BO = Backer, DO = Dowel, BD = Backer & Dowel Combination
NOTE: For additional color and size options, or curved applications options with flexible backers (special order), call TechLine at 1 877 276 7876.


* Actual panel length is 95"
NOTE: Panel backers are black. Custom backer colors available.

SUFFIX GUIDE


Backer Only = BO



Dowel Only = DO



Backer & Dowel Combination = BD



TechLine 877 276-7876
armstrong.com/woodworksgrille

Armstrong® World Industries

WOODWORKS® – Standard

WOODWORKS® Grille – Classics

Solid Wood Ceiling Panels

SUSTAIN® High Performance Sustainable Ceiling Systems

Declare.

LEED V5

COMMON MATERIALS FRAMEWORK			
Human Health	Declare Label	Climate Health	EPD
	HPD	Ecosystem Health	EPD
	3rd Party CDPH	Circular Economy	✓
OCCUPANT EXPERIENCE		Acoustics	✓

ACCESSORIES

	Item No.◆	Description	Dimensions Nominal W × L × H (Inches) Custom Sizes Available	Color	PCS/ CTN
Suspension Systems	**7301BL**	Prelude® XL® 12' HD Main Beam	15/16 × 144 × 1-11/16"	Black	20
	XL7341BL	Prelude XL 4' Cross Tee	15/16 × 48 × 1-11/16"	Black	60
	XL8320BL	Prelude XL 2' Cross Tee	15/16 × 24 × 1-3/8"	Black	60
Acoustical Infill Panels	**5823**	BioAcoustic™ Infill Panel	24 × 24 × 5/8"	Black Matte	12
	6657	BioAcoustic Infill Panel	11 × 48 × 5/8"	Black Matte	12
Accessories	**5672** _ _ _	Junction – 1-3/8"	1-1/2 × 96 × 2"	All finishes	Bulk
	5674 _ _ _	End Cap – 1-3/8"	3/4 × 96 × 2"	All finishes	Bulk
	5675 _ _ _	End Cap – 2-1/4"	3/4 × 96 × 2-3/4"	All finishes	Bulk
	7170 _ _ _	End Cap – 3-1/4"	3/4 × 96 × 3-3/4"	All finishes	Bulk
	7171 _ _ _	End Cap – 4-1/4"	3/4 × 96 × 4-3/4"	All finishes	Bulk
	7172 _ _ _	End Cap – 5-1/4"	3/4 × 96 × 5-3/4"	All finishes	Bulk
	5687	Backer Clip	3/8 × 11/16 × 7/8"	N/A	250 pcs/pail
	5457GAL1_ _ _	WoodWorks® Grille Solid End-Stain (Gallon)	N/A	All finishes	1 Gallon
	5457QT1_ _ _	WoodWorks Grille Solid End-Stain (Quart)	N/A	All finishes	1 Quart
	5688	Dowel Clip	3/8 × 7/8 × 7/8"	N/A	250 pcs/pail
	5671 _ _ _	Ledger	1 × 96 × 1/4"	All finishes	Bulk
	7891	12-Gauge Soft Hanger Wire	144" Length	N/A	140
	6459BL	Uptight Clip	5-1/2" × 1-3/4"	Black	25
	RC2BL	RC2 Radius Clip	N/A	Black	205
	7239	Adjustable Trim Clip	–	N/A	50
	7290GBL	WoodWorks Grille Flat Backer	7/8 × 12 × 1/2"	Black	18


◆ When specifying or ordering, include the 3-letter color suffix that coordinates with your WoodWorks ceiling: (e.g., 5671 G M P).
NOTE: For integration with Axiom® trim (Black recommended for use with solid wood).


ACOUSTICAL INFORMATION

Dots represent high level of performance.

Infill Panel Item No.	NRC
5823 or 6657	0.75 • 0.75 •

SUSPENSION SYSTEMS (Heavy-duty)





WOODWORKS® Grille – Classics

Solid Wood Ceiling Panels


SUSTAIN®
High Performance
Sustainable Ceiling Systems

Declare.


LEED V5

COMMON MATERIALS FRAMEWORK		Climate Health	EPD
Human Health	Declare Label	Ecosystem Health	EPD
	HPD		
	3rd Party CDPH	Circular Economy	✓
OCCUPANT EXPERIENCE		Acoustics	✓


SYSTEM INSTALLATION DETAILS

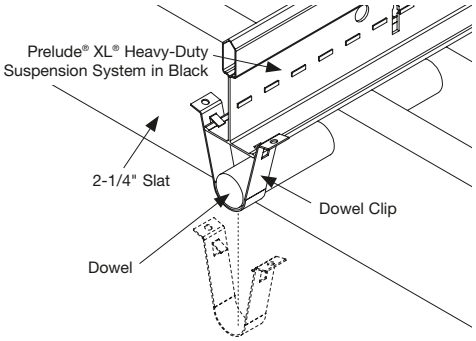

Ceiling Dowel Assembly

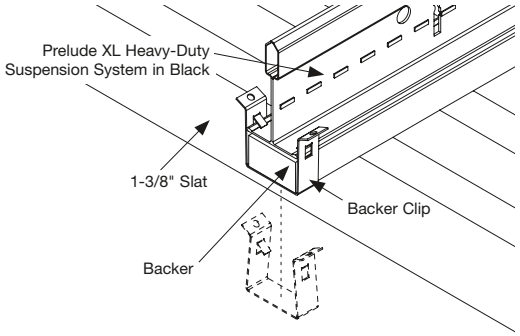


Ceiling Backer Assembly

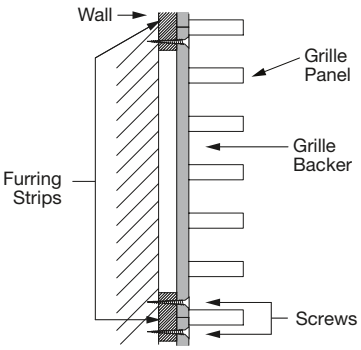

Wall Backer Assembly

Slat sizes over 2-1/4" are not recommended for wall applications. Contact TechLine for details at 877 276-7876.

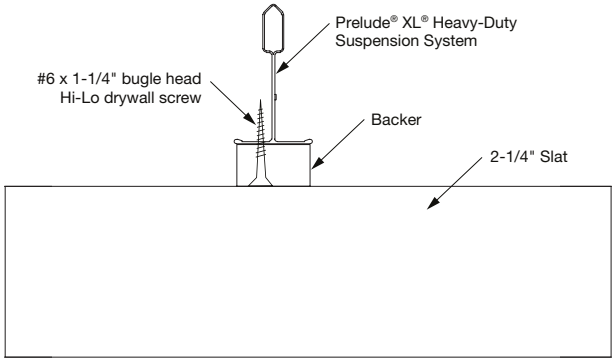

Screw Attachment Detail

NOTE: See WoodWorks® Grille installation instructions for details on faceted and seismic installations at armstrong.com/woodworks

PHYSICAL DATA

Material
Dowel, Slats, Backers, and Tegular panels – solid Poplar.

Surface Finish
Clear or tinted semi-gloss coating on all finishes except White (GWH), which has a lacquer finish.

Fire Performance
Class C: ASTM E84 surface burning characteristics. Flame Spread Index 200 or less. Smoke Developed Index 450 or less.

Fire performance will vary between wood species.

Flame stop coating is available as a custom option. Contact ASQuote@armstrong.com for details.

These panels, as with other architectural features located at the ceiling, may obstruct or skew the planned fire sprinkler water distribution pattern, or possibly delay or accelerate the activation of the sprinkler or fire detection systems by channeling heat from a fire either toward or away from the device. Consult a fire protection engineer, NFPA 13, and local codes for guidance where automatic fire detection and suppression systems are present.

Application Considerations
Variation among panels may occur due to the natural characteristics of the wood and grain.

Design Considerations
Custom slat and panel sizes available. For installations where slat alignment is critical, please see the WoodWorks Grille – Forté product line.

Backer & Dowel
For slat heights over 5", both dowels and backers are required for stability. Backer height is 1/2". Panel backers are black. Custom backer colors available.

Infill Panel Use
If no infill panel is used, unfinished parts of the suspension system and Axiom® trim will be visible from below.

Site Conditions
It is very important that panels are climatized prior to installation. Relative humidity between 25% and 55%, and temperatures between 50°F and 86°F, must be maintained.

Installation Consideration
When junction accessory is not used, the result will be a 1" gap between slat lengths.

Seismic Restraint
WoodWorks Grille – Classics panels have been engineered, tested, and approved for application in all seismic areas when installed per Armstrong Ceilings installation instructions.

Design & Pre-Construction Service
For complimentary design and pre-construction assistance, contact ProjectWorks® or visit armstrong.com/projectworks

Cleaning and Disinfecting
Cleaning and CDC approved disinfecting options available on armstrong.com/cleaning

FAST134 Program Considerations
Size of Job Matters: Big jobs, over 2500 SF or 50 pieces for shapes/vertical elements will have longer lead times.

Location Matters: Transit time not included. We are ready to ship in 1 week on FAST1 items. However, transit to the states west of Wyoming may add time.

Distributor Truck Schedule Matters: We rely on distribution to help move products around the country. When speed matters, work with your local distributor to ensure FAST134 service.

Stock vs Made-to-Order Matters: FAST3 & FAST4 items are made-to-order and will ship direct to distributor. FAST1 (stocked items) will go through distribution and depend on distributor truck schedules.

Warranty
Details at armstrong.com/warranty

Weight
Refer to Visual Selection chart.

TechLine / 877 276-7876
armstrong.com/woodworksgrille


BPCS-5106-526

LEED® is a registered trademark of the U.S. Green Building Council; Declare® and Living Building Challenge® (LBC) are registered trademarks of the International Living Future Institute®; WELL™ and WELL Building Standard™ are trademarks of the International WELL Building Institute; Revit® is a registered trademark of Autodesk, Inc.; FSC® is a registered trademark of Forest Stewardship Council®, A.C., license code FSC-C007626; all other trademarks used herein are the property of AWI Licensing LLC and/or its affiliates © 2026 AWI Licensing LLC

Armstrong®
World Industries

WOODWORKS® Grille – Classics

Linear Lighting
Quoted Ceiling Panels for Armstrong Integrated Lighting

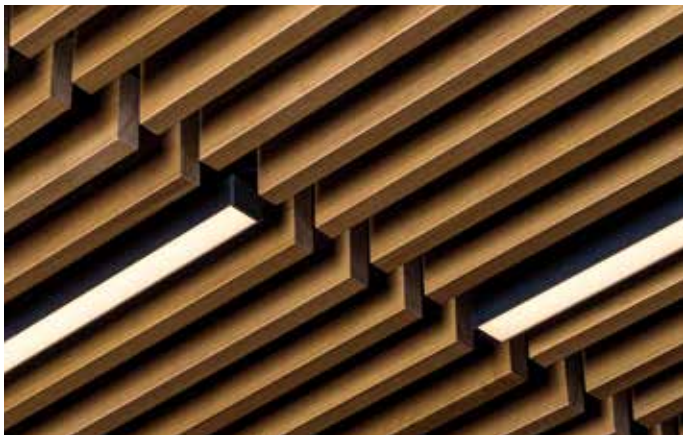

WoodWorks Grille – Classics panels in Natural Walnut with Armstrong Integrated Lighting 1-1/2" linear light fixture


Introducing Armstrong Integrated Lighting, the easiest way to specify stunning wood ceilings and lighting as one coordinated system. Developed in collaboration with LightArt®, this system combines pre-engineered grille ceiling panels and linear light fixtures for seamless installation and beautifully lit, high-performance spaces.

- Integrated lighting panels include factory-attached brackets for seamless, snap-in light integration.
- Linear lights can replace a grille slat or sit between slats
- Compatible with 3/4", 1-1/2", and 3-3/4" Armstrong Integrated Lighting fixtures
- Available as standard in 4', 6', and 8' lengths in black finish
- Extended length options with rolled lens for continuous runs
- 5-year lighting warranty when used as a complete system with WoodWorks® Grille – Classics ceiling panels
- Contact ASQuote@armstrong.com for pricing
- Reach out to ProjectWorks for layout support and help with integration details


VISUAL SELECTION

	Item No. ◆	# of Slats	Slat Width	Slat Height	O.C. Slat Spacing	Light Positions & Compatible Light Fixture Widths Refer to light position detail below. Light fixture widths are in inches. 1	1.5	2	2.5	3	3.5	4	4.5	5	5.5	6	6.5	7	7.5	8
WOODWORKS® Grille – Classics Integrated Lighting Ceiling Panels	**7263BO _ _ _***	6	5/8"	1-3/8"	2"		3/4*	3/4* 1-1/2*	3/4*	3/4* 1-1/2*	3/4*	3/4* 1-1/2*	3/4*	3/4* 1-1/2*	3/4*	3/4* 1-1/2*				
	7264BO_ _ _*	8	5/8"	1-3/8"	1-1/2"			3/4* 1-1/2*		3/4* 1-1/2*		3/4* 1-1/2*		3/4* 1-1/2*		3/4* 1-1/2*		3/4* 1-1/2*		3/4* 1-1/2*
	7265BO _ _ _	6	5/8"	2-1/4"	2"		3/4	3/4 1-1/2	3/4	3/4 1-1/2	3/4	3/4 1-1/2	3/4	3/4 1-1/2	3/4	3/4 1-1/2				
	7266BO _ _ _	8	5/8"	2-1/4"	1-1/2"			3/4 1-1/2		3/4 1-1/2		3/4 1-1/2		3/4 1-1/2		3/4 1-1/2		3/4 1-1/2		3/4 1-1/2
	7094BO _ _ _	4	1"	2-1/4"	3"		3/4 1-1/2	3/4 1-1/2 3-3/4	3/4 1-1/2	3/4 1-1/2 3-3/4	3/4 1-1/2	3/4 1-1/2 3-3/4								
	7095BO _ _ _	4	1"	2-1/4"	3"		3/4 1-1/2	3/4 1-1/2 3-3/4	3/4 1-1/2	3/4 1-1/2 3-3/4	3/4 1-1/2	3/4 1-1/2 3-3/4								
	7097BO _ _ _	3	1-1/4"	3-1/4"	4"		3/4 1-1/2		3/4 1-1/2											


◆ When specifying or ordering please include the panel item number, color suffix, and the light location. (e.g. 7265BO GLC Light Position 2)
* Lights will sit proud by 1/8". Refer to drawing below.

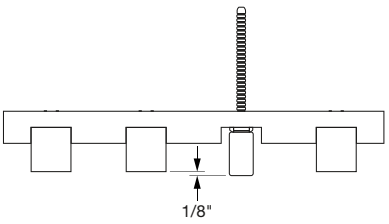


Light Sitting Proud on Panels with 1-3/8" Slat Height

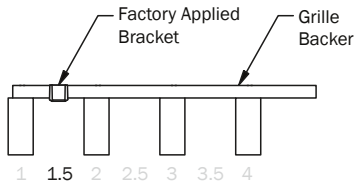


Light Position 1.5 (Between Slats 1-2)



Light Position 2 (Replace Slat 2)

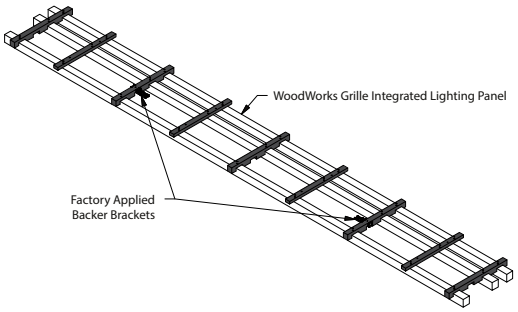

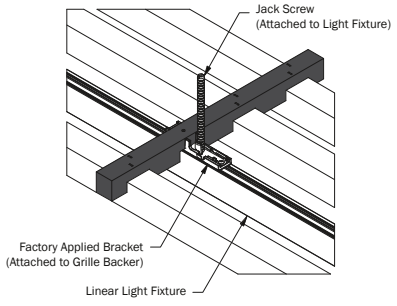

TechLine 877 276-7876
armstrong.com/woodworksgrille


Integrated Lighting

Armstrong Integrated Lighting


Linear Light fixtures for WoodWorks Grille

LIGHTING DIMENSIONS

Lengths & Widths

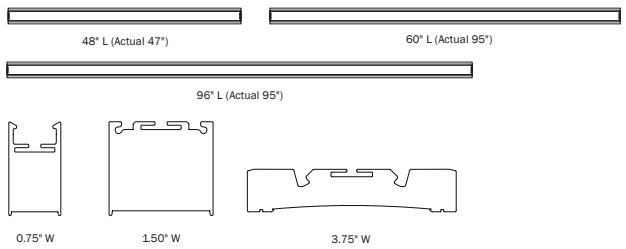

LIGHT PLACEMENT — BETWEEN SLATS

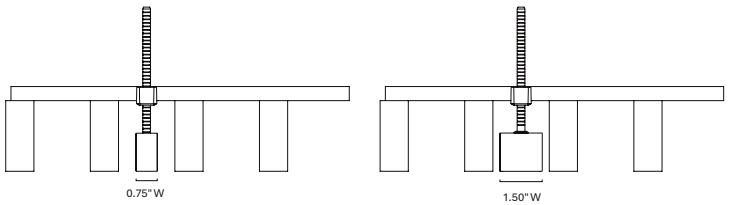

SPECIFICATIONS

Lighting
Solid state LED system 120v–277v input 2700k, 3000k, 3500k, 4000k options, 90 CRI light source options

Dimming
Dimming 0–10v

Mounting
WoodWorks® panels include factory-attached brackets for seamless, snap-in light integration. Division 26 specs must refer to WoodWorks Grille panel as suspension for the light.


Certification
CSA approved to UL® Standards, Declare® label certified, Living Building Challenge® compliant, Damp rated

Cleaning & Care
Designed to withstand the demands of rigorous cleaning requirements. Effective cleaning and disinfection of environmental surfaces reduces microbe transmission. Superior chemical resistance and durability promotes safety in any design application. Use common disinfectants and cleaners or reduce microbe transmission.

Warranty
5-year warranty when used as a complete system with WoodWorks® Grille - Classics ceiling panels.

For more lighting information or specification help, contact your local LightArt Lighting agent.

LIGHT PLACEMENT — SLAT REPLACEMENT

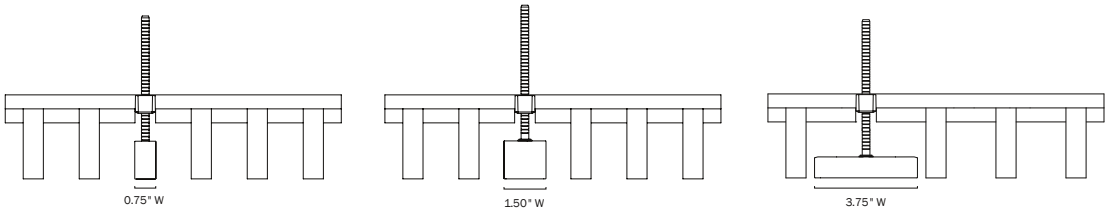

PERFORMANCE

Based on 3500K / 90CRI / Standard Distribution

Nominal Lumen Output (LM/FT)	Input Power (W/FT)	Efficacy (LM/W)
350	3.45	116
450	4.45	116
550	5.45	116
650	6.44	111
750	7.40	111
850	8.45	111
950	9.46	111
1050	10.25	108

LIGHT DISTRIBUTION

Based on measurement data

Color Temperature/CRI	Multiplier
2700K / 90	0.93
3000K / 90	0.97
3500K / 90	1.00
4000K / 90	1.03

OUTPUT MULTIPLIERS INSTRUCTIONS

Adjusted Value = $L_l \bar{y} C_m \bar{y} O_m$ where:

L_l = (Lumen output at 3500K / 90 CRI)$\bar{y}$

C_m = (Color Temp. / CRI Multiplier)$\bar{y}$

O_m = (Optic Multiplier)

Example:

850LM / 3000K / 80CRI / 2 sq Batwing Optic

(850)$\bar{y}$(1.02)$\bar{y}$(0.91) = 789LM

WOODWORKS® – Quoted

Integrated Lighting

SKU SPECIFICATION

SPECIFICATION CODE EXAMPLE: 2 QTY AIL–WOOD–GRILLE–FVNR–REPL–1.50–95L–935CK–700LM–EBM–STD

QTY. AIL - WOOD - GRILLE - [1] – [2] – [3] – [4] – [5] – [6] – [7] – [8]

Complete form to order WOODWORKS Grille. For each number, make one selection and enter in the corresponding box above.
**Indicates modified choices; additional lead times and/or costs may apply.*

1 CEILING STYLE

☐ FVNR	FORTÉ VENEERED CEILING PANELS
☐ FSLD	FORTÉ SOLID CEILING PANELS
☐ CLAS	CLASSICS CEILING PANELS

2 LIGHT PLACEMENT

☐ REPL	REPLACE SLAT
☐ BTW	BETWEEN SLATS

3 PROFILE

☐ 0.75	0.75"
☐ 1.50	1.50"
☐ 3.75	3.75"

4 LENGTH *(Lighting lengths correspond to the length of WOODWORKS Grille)*

☐ 47L	47" LENGTH
☐ 71L	71" LENGTH
☐ 95L	95" LENGTH
☐ CRL	CUSTOM RUN LENGTH *10' and longer in 2' increments. Max Length 200'*

5 LED CRI / CCT

☐ 927CK	90 CRI / 2700K
☐ 930CK	90 CRI / 3000K
☐ 935CK	90 CRI / 3500K
☐ 940CK	90 CRI / 4000K

6 OUTPUT

☐ 400LM	400 LM/FT	☐ 800LM	800 LM/FT
☐ 500LM	500 LM/FT	☐ 900LM	900 LM/FT
☐ 600LM	600 LM/FT	☐ 1000LM	1000 LM/FT
☐ 700LM	700 LM/FT *Max lumen output for 0.75"*	☐ 1100LM	1100 LM/FT

7 DIMMING AND CONTROLS

☐ P01	0–10V 1% DIMMING
☐ LEC*	HI-LUME 1% ECOSYSTEM LED DRIVER SOFT ON, FADE TO BLACK (LDE1 SERIES)
☐ EBM	0–10V 1% DIMMING INTEGRATED EM BATTERY OPTION *Max lumen output limited – consult LightArt*

8 REMOTE DRIVER BOX CORD LENGTH

☐ STD	8'
☐ EXT*	20'

WOODWORKS® – Quoted

Integrated Lighting

WOODWORKS® Grille – Classics

Downlighting



WoodWorks Grille – Classics panels with USAI Micro for WoodWorks – Vertical Slats light fixture

Seamlessly integrate downlight fixtures from USAI® Lighting with standard WoodWorks® Grille – Classics Backer & Dowel or Backer-only panels. Attach lights directly from the suspension system, eliminating the need for independent support of the fixture or modification of the suspension system.

KEY SELECTION ATTRIBUTES

- Engineered and tested to seamlessly integrate lighting fixtures with grid
- Install lights seamlessly for WoodWorks Grille – Classics Backer & Dowel and Backer-only Panels. Custom Dowel-only solutions are possible through ASQuote.
- USAI Lighting fixtures provide different downlighting styles for design flexibility
- Approved for use in all seismic categories


DESIGN CONSIDERATIONS


- Lights are designed to sit flush with the face of the WoodWorks panels
- Coordination between ceiling contractor and electrician is required for installation

WOODWORKS GRILLE – CLASSICS – Backer & Dowel and Backer-only Panels

WoodWorks Panel Item No.	Slat Width	Slat Height	Open Area Between Slats	Slats Per Panel	Coordinating USAI Fixture Family	Coordinating USAI Fixture Part Numbers	USAI Grid Mounting Bar Item No.	USAI Trim Yoke and Centering Spacer Item No.
7091BD*	5/8"	3-1/4"	1-3/4"	5	Micro™ for WoodWorks – Vertical Slats (4 cell max)	MXGXX-VS	UA2	MXGVS-GL91
7093BD*	5/8"	4-1/4"	1-3/4"	5	Micro for WoodWorks – Vertical Slats (8 cell max)	MXGXX-VS	UA2	MXGVS-GL93
7096BD*	1"	4-1/4"	2"	4	Micro for WoodWorks – Vertical Slats (8 cell max)	MXGXX-VS	UA2	MXGVS-GL96
7098BD*	1-1/4"	4-1/4"	2-3/4"	3	Micro for WoodWorks – Vertical Slats (8 cell max)	MXGXX-VS	UA2	MXGVS-GL98
7099BD*	1-1/4"	5-1/4"	2-3/4"	3	Micro for WoodWorks – Vertical Slats (8 cell max)	MXGXX-VS	UA2	MXGVS-GL99
7094BO	1"	2-1/4"	2"	4	Micro for WoodWorks – Vertical Slats (8 cell max)	MXGXX-VS	UA2	MXGVS-GL94
7095BO	1"	3-1/4"	2"	4	Micro for WoodWorks – Vertical Slats (8 cell max)	MXGXX-VS	UA2	MXGVS-GL95
7097BO	1-1/4"	3-1/4"	2-3/4"	3	Micro for WoodWorks – Vertical Slats (8 cell max)	MXGXX-VS	UA2	MXGVS-GL97

NOTE: Refer to lighting partner cut sheets for light location considerations
No panel field modification is required for USAI Micro light integration with WoodWorks Grille panels.
*Trimming dowels is recommended for access, unless remote driver is used.

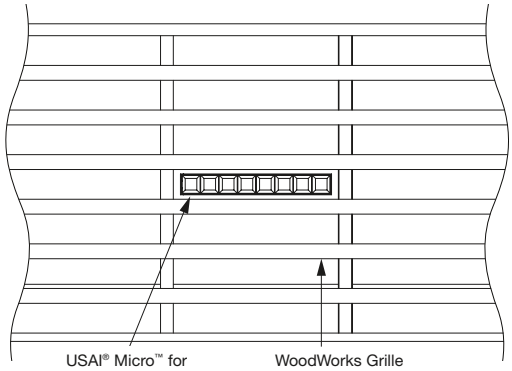

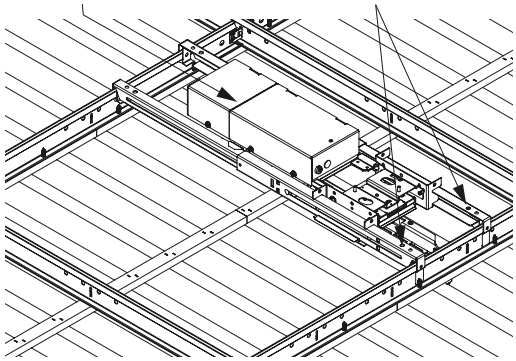

LIGHTING FIXTURES

Compatible with USAI Micro for WoodWorks – Vertical Slats lighting fixtures.

USAI® Lighting

For detailed lighting information, contact your local USAI Lighting representative.

USAI® is a trademark of USAI Lighting, LLC; all other trademarks used herein are the property of AWI Licensing LLC and/or its affiliates © 2026 AWI Licensing LLC

Armstrong® World Industries