
WOODWORKS® Grille – Classics

Solid Wood Wall Panels


SUSTAIN®
High Performance
Sustainable
Ceiling Systems

FAST 4 WEEKS or Less

FAST134
Select Items Ship Fast
armstrong.com/fast134

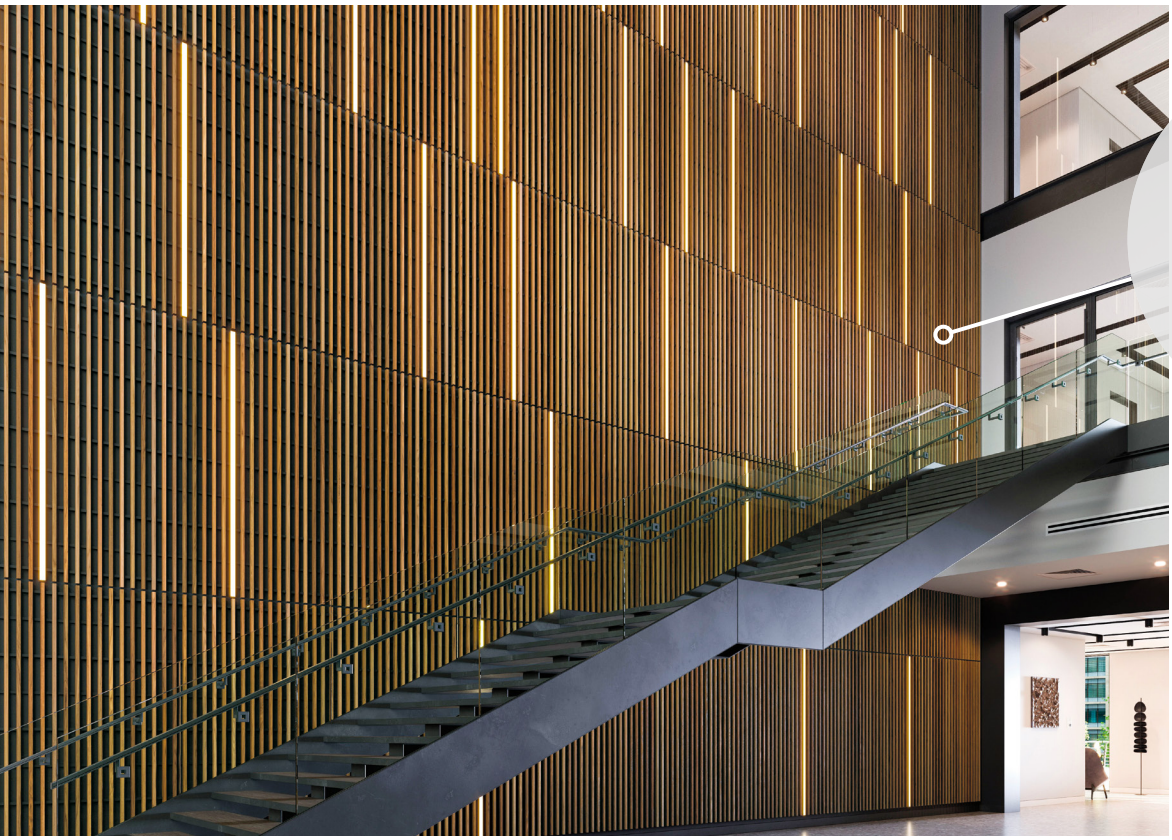

CAD/Revit® drawings at:
armstrong.com/cadrevit

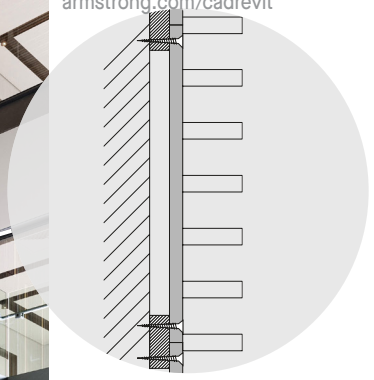

WoodWorks Grille – Classics wall panels in Natural Walnut with Armstrong Integrated Lighting


These warm, natural wood walls are offered in a variety of finishes and design options.


KEY SELECTION ATTRIBUTES

- Simplify lighting coordination at every stage with Armstrong Integrated Lighting; Lights and pre-engineered grille lighting integration panels are designed to work together for seamless specification and installation
- 10 standard finishes on solid poplar are tinted to replicate naturally occurring wood tones
- Panels are part of the Sustain® portfolio and meet the most stringent industry sustainability compliance standards today
- Coordinating solid wood trims in 4" and 6" depths
- The natural warmth of wood can contribute to biophilic designs and building certification standards like the WELL™ v2 "Nature and Place" feature
- Select products included in the FAST134 program – ready to ship in 4 weeks or less
- CleanAssure™ family of products – includes disinfectable panels, suspension systems, and trim
- Custom slat sizes and finishes available for every project
- Install in the ceiling, on the wall, or create ceiling-to-wall transitions
- FSC® Certified wood available as a premium quoted option (FSC-C007626)
- Made in the U.S.A. of domestic and global content
- Build America, Buy America (BABA) Act compliant

DETAILS

Backer Only = BO



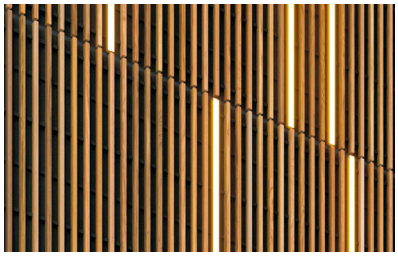

ARMSTRONG® INTEGRATED LIGHTING: WoodWorks Grille – Classics panels in Natural Walnut with 1-1/2" linear light fixture. See lighting section for details.

TechLine 877 276-7876
armstrong.com/wwclassics

Armstrong®
World Industries

WOODWORKS® Grille – Classics

Solid Wood Wall Panels

SUSTAIN®
High Performance
Sustainable Ceiling Systems


Declare.


LEED V5


COMMON MATERIALS FRAMEWORK		Climate Health	EPD
Human Health	Declare Label	Ecosystem Health	EPD
	HPD		
	3rd Party CDPH	Circular Economy	✓
OCCUPANT EXPERIENCE		Acoustics	✓

FINISH RANGES ON SOLID POPLAR

Our tinted finishes allow the natural character of the poplar to shine through. The images here reflect the visual range that is likely within our product. Installers will want to lay out panels before installing to achieve preferred aesthetic.


Bleached Grey (GBG)


Classic Grey (GCG)


Carbon Grey (GCB)


Rich Mahogany (GRY)


Antique Oak (GAO)


Red Oak (GRK)


English Chestnut (GEC)


Golden Maple (GGM)


Natural Walnut (GWN)


Warm Oak (GWO)


Forest Walnut (GFW)

CUSTOM FINISHES


Custom Wood
Species and Finishes
Available

Panel backers are black. Made-to-order, custom backer colors available.

LEGACY FINISHES


Maple (GMP)


Light Cherry (GLC)


Dark Cherry (GDC)

White (GWH)

Due to printing limitations, shade may vary from actual product.

WOODWORKS® Grille – Classics

Solid Wood Wall Panels






SUSTAIN® High Performance Sustainable Ceiling Systems

Declare.

LEED V5

COMMON MATERIALS FRAMEWORK			
Human Health	Declare Label	Climate Health	EPD
	HPD	Ecosystem Health	EPD
	3rd Party CDPH	Circular Economy	✓
OCCUPANT EXPERIENCE		Acoustics	✓

STANDARD PANEL CONFIGURATIONS

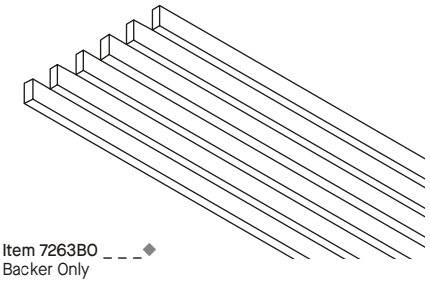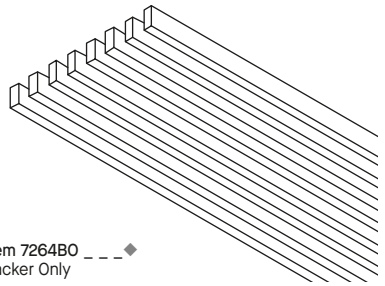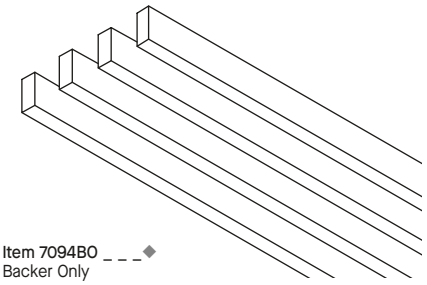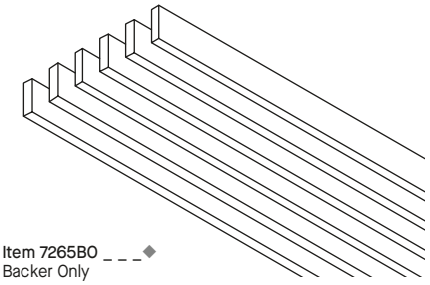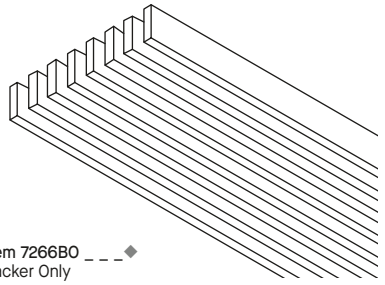	1" SLAT WIDTH	5/8" SLAT WIDTH	
	4 Slats Per Panel	6 Slats Per Panel	8 Slats Per Panel
1-3/8" SLAT HEIGHT		 Item 7263BO _ _ _◆ Backer Only	 Item 7264BO _ _ _◆ Backer Only
2-1/4" SLAT HEIGHT	 Item 7094BO _ _ _◆ Backer Only	 Item 7265BO _ _ _◆ Backer Only	 Item 7266BO _ _ _◆ Backer Only

◆ When specifying or ordering, include the appropriate finish suffix (e.g., 7094BO G B G - 4 slats 2-1/4" in Bleached Grey).

VISUAL SELECTION

PERFORMANCE

	Item No. ◆	Dimensions Nominal W × L × H* (Inches) Custom Sizes Available	Custom Slat Sizes Available			Slat Spacing (Nominal)	LBS/SF	% Open Area	CleanAssure™ Disinfectable Panels: Fog	Spray	Wipe
WOODWORKS® Grille – Classics Wall Panels	**7263BO** _ _ _	12 × 96 × 1-7/8" Backer Only	5/8" W	1-3/8" H	6 slats	1-3/8"	1.29	69%	•	•	•
	7264BO _ _ _	12 × 96 × 1-7/8" Backer Only	5/8" W	1-3/8" H	8 slats	7/8"	1.68	58%	•	•	•
	7265BO _ _ _	12 × 96 × 2-3/4" Backer Only	5/8" W	2-1/4" H	6 slats	1-3/8"	2.03	69%	•	•	•
	7266BO _ _ _	12 × 96 × 2-3/4" Backer Only	5/8" W	2-1/4" H	8 slats	7/8"	2.67	58%	•	•	•
	7094BO _ _ _	12 × 96 × 2-3/4" Backer Only	1" W	2-1/4" H	4 slats	2"	2.16	67%	•	•	•

FAST 4 WEEKS or Less

FAST134 program items ready to ship from manufacturer in 4 weeks or less.
Up-to-date lead times and product options (sizes and colors) at armstrong.com/fast134

◆ When specifying or ordering, include the appropriate finish suffix (e.g., 7094BO G B G - 4 slats 2-1/4" in Bleached Grey).
NOTE: For additional color and size options, or curved applications options with flexible backers (special order), call TechLine at 877 276 7876.
* Actual panel length is 95"
NOTE: Panel backers are black. Custom backer colors available.

WOODWORKS® Grille – Classics

Solid Wood Wall Panels

SUSTAIN® High Performance Sustainable Ceiling Systems

Declare.

LEED V5


COMMON MATERIALS FRAMEWORK		Climate Health	EPD
Human Health	Declare Label	Ecosystem Health	EPD
	HPD		
	3rd Party CDPH	Circular Economy	✓
OCCUPANT EXPERIENCE		Acoustics	✓

ACCESSORIES

	Item No. ◆	Description	Dimensions Nominal W × L × H (Inches)	Color	Pcs/ Ctn
Accessories	**5672 _ _ _**	Junction – 1-3/8"	1-1/2 × 96 × 2"	All finishes	Bulk
	5674 _ _ _	End Cap – 1-3/8"	3/4 × 96 × 2"	All finishes	Bulk
	5675 _ _ _	End Cap – 2-1/4"	3/4 × 96 × 2-3/4"	All finishes	Bulk
	7170 _ _ _	End Cap – 3-1/4"	3/4 × 96 × 3-3/4"	All finishes	Bulk
	7171 _ _ _	End Cap – 4-1/4"	3/4 × 96 × 4-3/4"	All finishes	Bulk
	7172 _ _ _	End Cap – 5-1/4"	3/4 × 96 × 5-3/4"	All finishes	Bulk
	5687	Backer Clip	3/8 × 11/16 × 7/8"	N/A	250 pcs/pail
	5457GAL1_ _ _	End-Stain	N/A	All finishes	1 Gallon
	5457QT1_ _ _	End-Stain	N/A	All finishes	1 Quart
	5671 _ _ _	Ledger	1 × 96 × 1/4"	All finishes	Bulk
	7891	12-Gauge Soft Hanger Wire	144" Length	N/A	140
	6459BL	Uptight Clip	5-1/2" × 1-3/4"	Black	25
	RC2BL	RC2 Radius Clip	N/A	Black	205
	7290GBL	WoodWorks Grille Flat Backer	7/8 × 12 × 1/2"	Black	18

◆ When specifying or ordering, include the 3-letter finish suffix that coordinates with your WoodWorks® wall: (e.g., 5671 G M P).
NOTE: For integration with Axiom® trim (Black recommended for use with solid wood).

SYSTEM INSTALLATION DETAILS

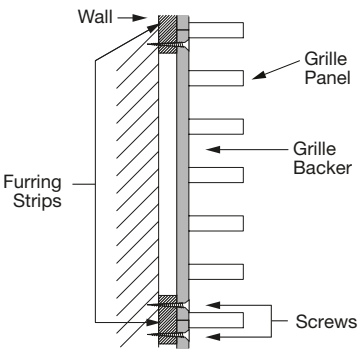

Wall Backer Assembly

Slat sizes over 2-1/4" are not recommended for wall applications. Contact TechLine for details at 877 276-7876.

PHYSICAL DATA

Material
Slats, Backers, and Tegular panels – solid Poplar.

Surface Finish
Clear or tinted semi-gloss coating on all finishes except White (GWH), which has a lacquer finish.

Fire Performance
Class C: ASTM E84 surface burning characteristics. Flame Spread Index 200 or less. Smoke Developed Index 450 or less.

Fire performance will vary between wood species.

Flame stop coating is available as a custom option. Contact ASQuote@armstrong.com for details.

Application Considerations
Variation among panels may occur due to the natural characteristics of the wood and grain.

Design Considerations
Custom slat and panel sizes available. Panel backers are black; consider installing panels on a dark wall or backdrop. Custom backer colors available.

For installations where slat alignment is critical, please see the WoodWorks Grille – Forté product line.

Site Conditions
It is very important that panels are climatized prior to installation. Relative humidity between 25% and 55%, and temperatures between 50°F and 86°F, must be maintained.

Installation Consideration
When junction accessory is not used, the result will be a 1" gap between slat lengths.

Seismic Restraint
WoodWorks Grille – Classics panels have been engineered, tested, and approved for application in all seismic areas when installed per Armstrong Ceilings & Walls installation instructions.

FAST134 Program Considerations
Size of Job Matters: Big jobs, over 2500 SF or 50 pieces for shapes/vertical elements will have longer lead times.

Location Matters: Transit time not included. We are ready to ship in 1 week on FAST1 items. However, transit to the states west of Wyoming may add time.

Distributor Truck Schedule Matters: We rely on distribution to help move products around the country. When speed matters, work with your local distributor to ensure FAST134 service.

Stock vs Made-to-Order Matters: FAST3 & FAST4 items are made-to-order and will ship direct to distributor. FAST1 (stocked items) will go through distribution and depend on distributor truck schedules.

Design & Pre-Construction Service
For complimentary design and pre-construction assistance, contact ProjectWorks® or visit armstrong.com/projectworks

Cleaning and Disinfecting
Cleaning and CDC approved disinfecting options available on armstrong.com/cleaning

Warranty
Details at armstrong.com/warranty

Weight
7263BO – 1.29 LBS/SF
7264BO – 1.68 LBS/SF
7265BO – 2.03 LBS/SF
7266BO – 2.67 LBS/SF
7094BO – 2.16 LBS/SF

TechLine / 877 276-7876
armstrong.com/wwclassics


BPCS-6814-1026

LEED® is a registered trademark of the U.S. Green Building Council; Declare® and Living Building Challenge® (LBC) are registered trademarks of the International Living Future Institute®; WELL™ and WELL Building Standard™ are trademarks of the International WELL Building Institute; Revit® is a registered trademark of Autodesk, Inc.; FSC® is a registered trademark of Forest Stewardship Council®, A.C., license code FSC-C007626; all other trademarks used herein are the property of AWI Licensing LLC and/or its affiliates © 2026 AWI Licensing LLC

Armstrong® World Industries

WOODWORKS® Grille – Classics

Linear Lighting
Quoted Wall Panels for Armstrong Integrated Lighting

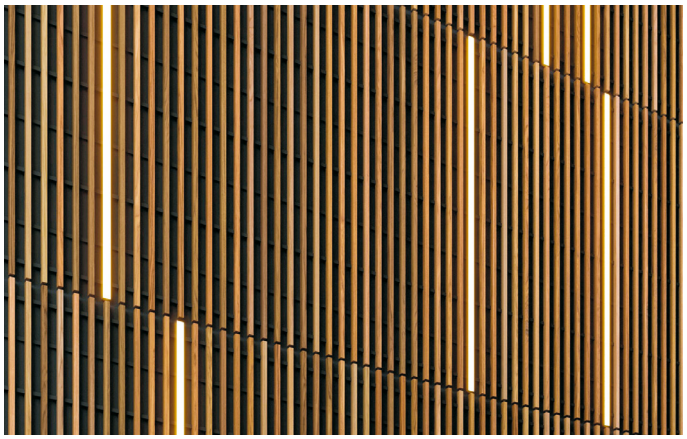

WoodWorks Grille – Classics panels in Natural Walnut with Armstrong Integrated Lighting 1-1/2" linear light fixture

Introducing Armstrong Integrated Lighting, the easiest way to specify stunning wood walls and lighting as one coordinated system. Developed in collaboration with LightArt®, this system combines pre-engineered grille light integration wall panels and linear light fixtures for seamless installation and beautifully lit, high-performance spaces.


- Integrated lighting panels include factory-attached brackets for seamless, snap-in light integration.
- Linear lights can replace a grille slat or sit between slats
- Compatible with 3/4" and 1-1/2" Armstrong Integrated Lighting fixtures
- Available in a black finish, and in multiple lengths, including a standard 8' length that matches Grille – Classics 8' panel length
- Extended length options with rolled lens for continuous runs
- 5-year lighting warranty when used as a complete system with WoodWorks® Grille – Classics wall panels
- Contact ASQuote@armstrong.com for pricing
- Reach out to ProjectWorks for layout support and help with integration details

VISUAL SELECTION


	Light Integration Panel Item No. ◆	Standard Grille Panel Item No. (for reference only)	#of Slats	Slat Width	Slat Height	O.C. Slat Spacing	Light Positions & Compatible Light Fixture Widths Refer to light position detail below. Light fixture widths are in inches.														
							1	1.5	2	2.5	3	3.5	4	4.5	5	5.5	6	6.5	7	7.5	8
WOODWORKS® Grille – Classics Integrated Lighting Wall Panels	BPAS2004 (Full custom item number generated upon order)	7263BO _ _ _*	6	5/8"	1-3/8"	2"		3/4	3/4 1-1/2	3/4	3/4 1-1/2	3/4	3/4 1-1/2	3/4	3/4 1-1/2	3/4	3/4 1-1/2				
		7264BO_ _ _*	8	5/8"	1-3/8"	1-1/2"			3/4 1-1/2		3/4 1-1/2		3/4 1-1/2		3/4 1-1/2		3/4 1-1/2		3/4 1-1/2		3/4 1-1/2
		7265BO _ _ _	6	5/8"	2-1/4"	2"		3/4	3/4 1-1/2	3/4	3/4 1-1/2	3/4	3/4 1-1/2	3/4	3/4 1-1/2	3/4	3/4 1-1/2				
		7266BO _ _ _	8	5/8"	2-1/4"	1-1/2"			3/4 1-1/2		3/4 1-1/2		3/4 1-1/2		3/4 1-1/2		3/4 1-1/2		3/4 1-1/2		3/4 1-1/2
		7094BO _ _ _	4	1"	2-1/4"	3"		3/4 1-1/2	3/4 1-1/2	3/4 1-1/2	3/4 1-1/2	3/4 1-1/2	3/4 1-1/2								

◆ When specifying or ordering please include the light integration panel item number, reference standard panel item number, color suffix, and the light location.
(e.g. BPAS2004, Standard Grille Panel 7265BO G L C, Light Position 2)


* Lights will sit proud by 1/16". Refer to drawing below.
NOTE: Doghouse driver option is visible on all 3/4" light fixtures




Light Sitting Proud on Panels with 1-3/8" Slat Height

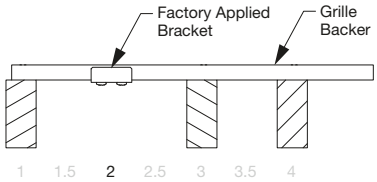


Light Position 2 (Replace Slat 2)

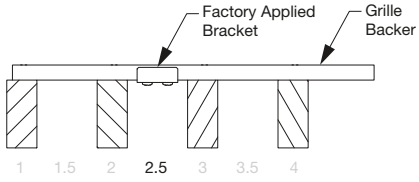

Light Position 2.5 (Between Slats 2-3)

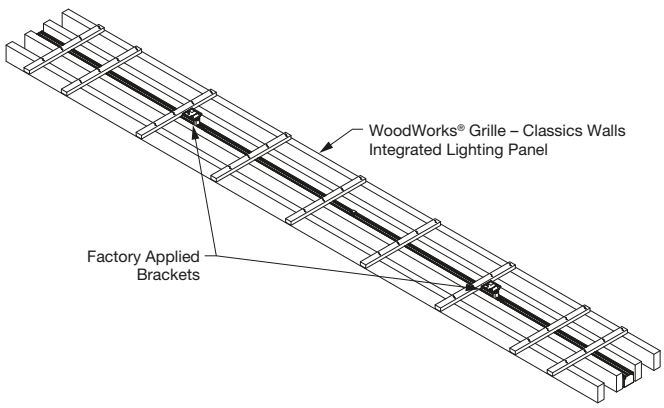

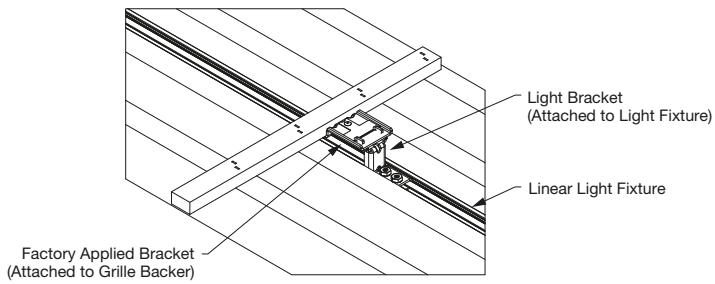

Integrated Lighting

LIGHTING SOLUTIONS

Armstrong Integrated Lighting

Linear Light Fixtures for WoodWorks® Grille

LIGHTING DIMENSIONS

Lengths & Widths



47" L




71" L



95" L

LIGHT PLACEMENT — BETWEEN SLATS



0.75" W 1.50" W

SPECIFICATIONS

Lighting
Solid state LED system 120v–277v input 2700k, 3000k, 3500k, 4000k options, 90 CRI light source options.

Dimming
Dimming 0–10v

Mounting
Integrates into the Armstrong® WoodWorks® Sensoria™ – Blades and Armstrong® WoodWorks® Grille – Classics wall light integration panels. Standard fixture mounting meets the desired qualification level for California.


Certification
CSA approved to UL® Standards, Declare® label certified, Living Building Challenge® compliant, Damp rated

Cleaning & Care
Designed to withstand the demands of rigorous cleaning requirements. Effective cleaning and disinfection of environmental surfaces reduces microbe transmission. Superior chemical resistance and durability promotes safety in any design application. Use common disinfectants and cleaners to reduce microbe transmission.


Warranty
5-year warranty when used as a complete system with WoodWorks® Grille – Classics wall panels.

For more lighting information or specification help, contact your local LightArt Lighting agent.


LIGHT PLACEMENT

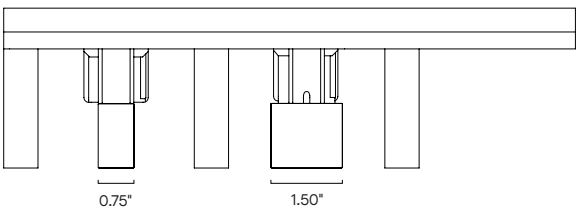

End View

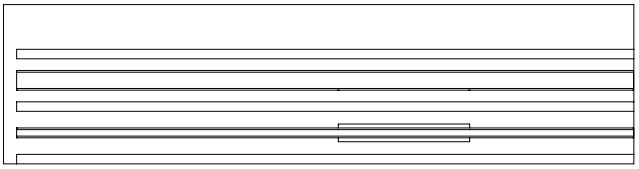

Front View

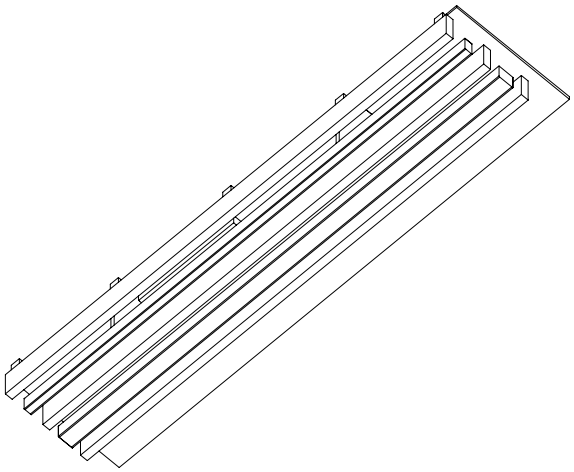

Isometric View

PERFORMANCE

Based on 3500K / 90CRI / Standard Distribution

Nominal Lumen Output (LM/FT)	Input Power (W/FT)		Efficacy (LM/W)	
	0.75"	1.5"	0.75"	1.5"
400	4.85	3.65	82.42	109.68
500	6.15	4.62	81.34	108.28
600	7.47	5.62	80.31	106.81
700	8.79	6.62	79.60	105.78
800	–	7.62	–	105.02
900	–	8.65	–	104.08
1000	–	9.68	–	103.34
1100	–	10.74	–	102.47

(If fixture power is under 15W, please specify a 120V or 277V driver)

LIGHT DISTRIBUTION

Based on measurement data

Color Temperature/CRI	Multiplier
2700K / 90	0.98
3000K / 90	1.00
3500K / 90	1.00
4000K / 90	1.03

OUTPUT MULTIPLIERS INSTRUCTIONS

Adjusted Value = $L_l \bar{y}\, C_m \bar{y}$ where:

L_l = (Lumen output at 3500K/90 CRI) $\bar{y}$

C_m = (Color Temp./CRI Multiplier) $\bar{y}$

Example:

850LM / 4000K / 90CRI

(850) $\bar{y}$ (1.03) $\bar{y}$ = 875.5LM

WOODWORKS® – Quoted

Integrated Lighting

LIGHTING SOLUTIONS

Armstrong Integrated Lighting

Linear Light Fixtures for WoodWorks® Grille

SKU SPECIFICATION

SPECIFICATION CODE EXAMPLE: 2 QTY AIL–WOOD–WALLS–CLAS–CP2–1.50–95L–935CK–700LM–LEC–RMT

QTY. AIL - LW - WALLS - [1] – [2] – [3] – [4] – [5] – [6] – [7] – [8]

Complete form to order WoodWorks® Grille Walls. For each number, make one selection and enter in the corresponding box above.
**Indicates modified choices; additional lead times, cost, and limited lumen outputs may apply.*

1 WALL PANEL OPTIONS

☐ SENS	WOODWORKS® SENSORIA™ – BLADES
☐ CLAS	WOODWORKS® GRILLE – CLASSICS

2 PANEL SLAT HEIGHT

☐ CP1	1.375"
☐ CP2	2.25"
☐ SP2	2.50"

3 LIGHT PROFILE

☐ 0.75	0.75"
☐ 1.50	1.50"

4 LENGTH *(47"L and 95"L lighting lengths correspond to the length of WoodWorks® Sensoria™ – Blades)*

☐ 35L*	35" LENGTH
☐ 47L**	47" LENGTH
☐ 59L*	59" LENGTH
☐ 71L*	71" LENGTH
☐ 83L*	83" LENGTH
☐ 95L**	95" LENGTH
☐ CRL	CUSTOM RUN LENGTH _____

** Custom WoodWorks Sensoria – Blades panels required, consult Armstrong's ProjectWorks® Design Services*
*** Works with standard WoodWorks Sensoria – Blades wall light integration panels*

5 LED CRI / CCT

☐ 927CK	90 CRI / 2700K
☐ 930CK	90 CRI / 3000K
☐ 935CK	90 CRI / 3500K
☐ 940CK	90 CRI / 4000K

6 OUTPUT

☐ 400LM	400 LM/FT
☐ 500LM	500 LM/FT
☐ 600LM	600 LM/FT
☐ 700LM	700 LM/FT *Max lumen output for 0.75"*
☐ 800LM	800 LM/FT
☐ 900LM	900 LM/FT
☐ 1000LM	1000 LM/FT
☐ 1100LM	1100 LM/FT

7 DIMMING AND CONTROLS

☐ P01	0–10V 1% DIMMING
☐ LEC*	HI-LUME 1% ECOSYSTEM LED DRIVER SOFT ON, FADE TO BLACK (LDE1 SERIES)

8 DRIVER BOX

☐ RMT	REMOTE DRIVER BOX
☐ DOG	DOGHOUSE *Available for 400LM/FT only*

WOODWORKS® – Quoted

Integrated Lighting