

WOODWORKS® Grille – Forté

Veneered Wall Panels with Notched Backers

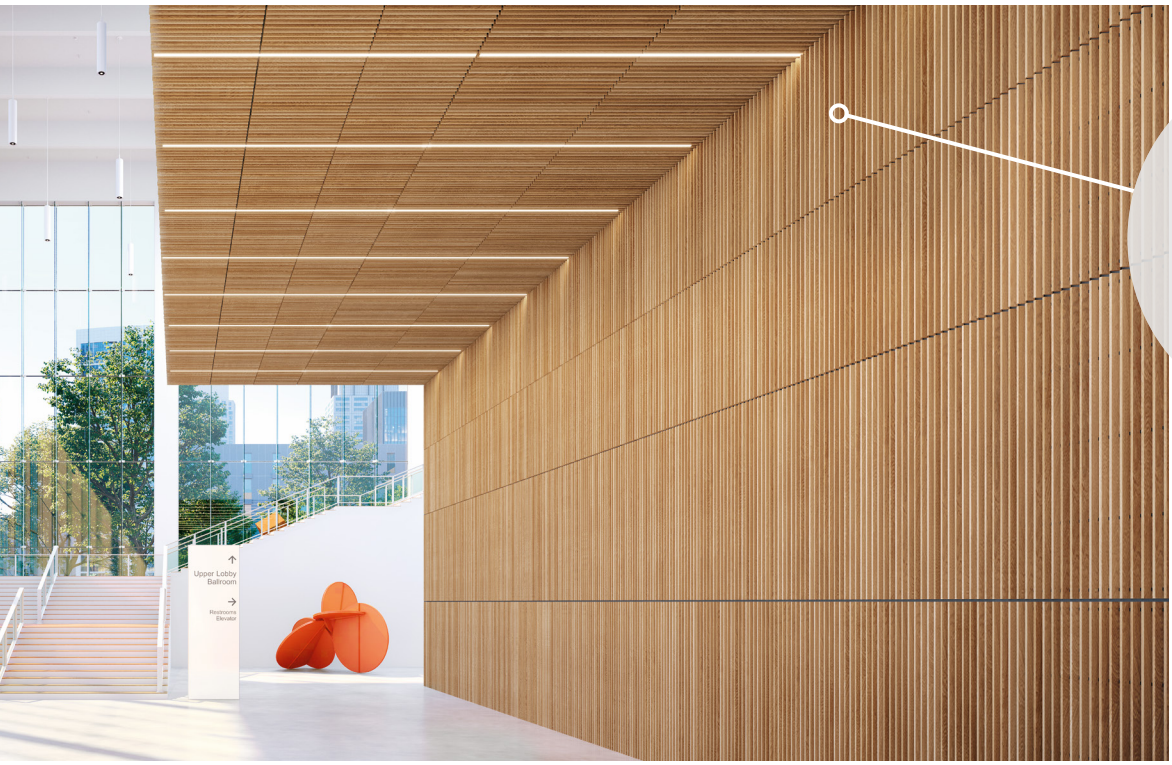

CAD/Revit® drawings at:
armstrongceilings.com/cadrevit

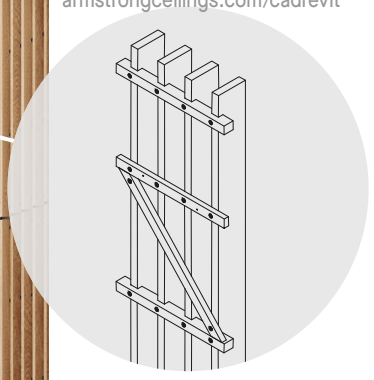


WoodWorks Grille – Forté veneered panels 3/4" W × 2-1/4" H with 4 slats in 4', 6', and 8' lengths in Rift White Oak (NRO)

Ten standard wood veneers offer unparalleled natural beauty through varying species, graining and color.

KEY SELECTION ATTRIBUTES

- 2 standard panel configurations in 4', 6', and 8' lengths minimize the need for customization, field cutting, and waste
- 10 standard veneers feature various species and cuts for beautiful wood visuals
- Enhanced structural design incorporates notched and diagonal backers to reinforce slat alignment, minimizing the naturally occurring twist of wood, improving handleability during install, and reducing call-backs
- Coordinating veneered trims in 4", 6", and 8" depths
- ASTM E84 Class A fire performance
- Install in the ceiling, on the wall, or create ceiling-to-wall transitions
- Pre-drilled backer holes eliminate splitting for long-term durability
- Centered backers allow for a non-directional install, providing flexibility in install layout and clean accessibility
- CleanAssure™ family of products – includes disinfectable panels, suspension systems, and trim
- Premium options include FSC® Certified wood (FSC-C007626)
- Custom options include unique panel configurations and lengths, felt backers, and additional species. Contact ASQuote@armstrong.com
- Made in the U.S.A. of domestic and global content
- Build America, Buy America (BABA) Act compliant

VENEER PANEL BACKER DETAIL

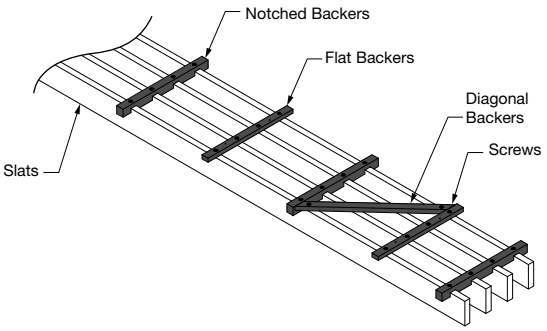

TechLine 877 276-7876
armstrongceilings.com/woodworksgrille

Armstrong® World Industries

WOODWORKS® Grille – Forté

Veneered Wall Panels with Notched Backers

RECYCLED CONTENT
UP TO 60%

LEED V5


COMMON MATERIALS FRAMEWORK	Climate Health	EPD
	Human Health	Ecosystem Health	EPD
		Circular Economy	✓
OCCUPANT EXPERIENCE		Acoustics	✓

FINISH RANGES

The carefully curated species and veneer cut offer a beautiful natural variation. The images here reflect the visual range that is likely within our product. Darkest to lightest tones may occur within an installation due to the character of wood.


Plain Slice White Maple (NWM)


Plain Slice White Ash (NWA)


Vertical Grain Fir (NVF)


Rift White Oak (NRO)


Plain Slice White Oak (NOK)


Plain Slice Cherry (NPC)


Quartered Mahogany (NQM)


Quartered Sapele (NQS)


Quartered Walnut (NQW)


Plain Slice Walnut (NWN)

CUSTOM FINISHES



Custom Wood Species and Finishes Available


Made-to-order, custom backer colors available.


Due to printing limitations, shade may vary from actual product.

VENEER CUTS

Different cuts of a log will yield different graining visuals. Choose your veneer to achieve your desired look.


Plain Sliced
Produces the well-known cathedral or loop-grain effect.


Quarter Sliced
Produces a striped, often straight-grain effect.


Rift Sliced
Produces a tight, linear grain along the entire length of the veneer.

TechLine 877 276-7876
armstrongceilings.com/woodworksgrille

Armstrong® World Industries

WOODWORKS® Grille – Forté

Veneered Wall Panels with Notched Backers



RECYCLED CONTENT
UP TO 60%

LEED V5

COMMON MATERIALS FRAMEWORK		
Human Health	Climate Health	EPD
	Ecosystem Health	EPD
	Circular Economy	✓
OCCUPANT EXPERIENCE	Acoustics	✓

VISUAL SELECTION 12" width, 3/4" slat (Available in 4', 6', and 8' nominal lengths)

PERFORMANCE

	Item No.◆		Custom Slat Sizes Available		Space Between Slats (Nominal)	% Open Area	Lbs./ S.F.	CleanAssure™ Disinfectable Panels: Fog	Spray	Wipe
WOODWORKS® Grille – Forté Veneered Panels	**6333L_S14_ _ _** 	3/4" W	2-1/2" H	3 slats	3-1/4"	81%†	2.1	•	•	•
	6334L_S14_ _ _ 	3/4" W	2-1/2" H	4 slats	2-1/4"	75%	2.7	•	•	•

◆ When specifying or ordering please include the slat length (4, 6, or 8) and finish suffix (e.g. 6333L 4 S14 N Q W – 3 slats, 3/4 × 48 × 2-1/2" in Quartered Walnut veneer).

NOTE: Panel backers are black; custom backer colors available. For additional species/finish and size options, or curved application options, contact ASQuote@armstrong.com

633 3 L4 S14 NQW

- 633 — Veneered Wood
- 3 — Slats per Panel: 3
- L4 — Panel Length: 4'
- S14 — Slat Width & Height Differentiator
- NQW — Veneer: Quartered Walnut

ACCESSORIES

	Item No.◆	Description	Dimensions Nominal W × L × H (Inches)	Color	PCS/CTN
Accessories	**7290GBL**	Flat Backer Kit	7/8 × 12 × 1/2"	Black	18
Perimeter Trim	**6481F07W1H4_ _ _**	4" Veneered Trim with 4 Clips (Item 5925)	3/4 × 96 × 4"	All Veneers	N/A
	6481F07W1H6_ _ _	6" Veneered Trim with 4 Clips (Item 5925)	3/4 × 96 × 6"	All Veneers	N/A
	6481F07W1H8_ _ _	8" Veneered Trim with 4 Clips (Item 5925)	3/4 × 96 × 8"	All Veneers	N/A
	5925	Replacement Trim Clips	N/A	Mill Finish	25
	AX_VESTR_ _ _	Axiom® Vector Straight Trim – Recommend in Black 6" and up	N/A	Silver Grey, Black, Gun Metal	10 LF
	AX_VECUR_ _ _	Axiom Vector Curved Trim – Recommend in Black 6" and up	N/A	Silver Grey, Black, Gun Metal	10 LF
	6408_ _ _	WoodWorks Edgebanding	1-1/4" × 300"	All Veneers	25 LF

◆ When specifying or ordering please include the 3-letter color suffix that coordinates with your WoodWorks wall: (e.g., 6481F07W1H4 N W M).

WOODWORKS® Grille – Forté


Veneered Wall Panels with Notched Backers

RECYCLED CONTENT
UP TO 60%

LEED V5


COMMON MATERIALS FRAMEWORK	Climate Health	EPD
	Human Health	EPD
	Ecosystem Health	EPD
	Circular Economy	✓
OCCUPANT EXPERIENCE	Acoustics	✓

SYSTEM INSTALLATION DETAILS

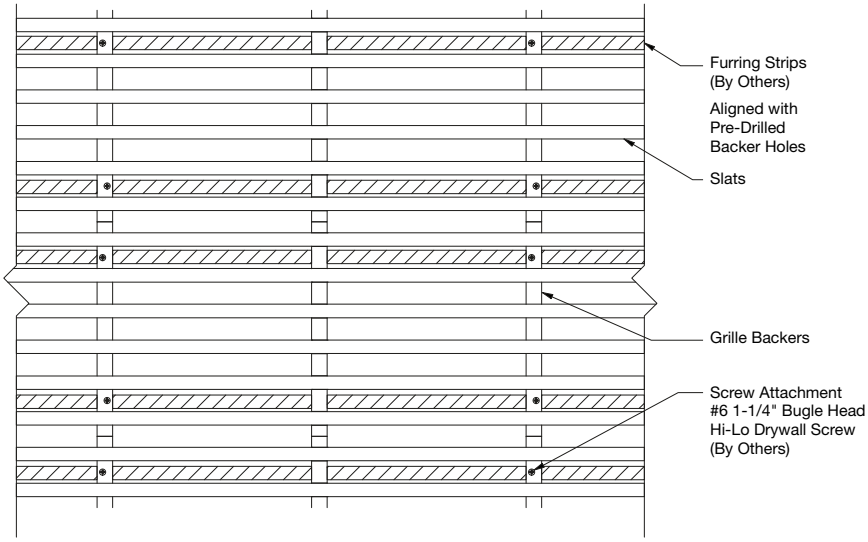


Slat sizes over 2-1/2" are not recommended for wall applications. Contact TechLine for details at 877 276-7876.

1 Wall Mount via Furring Strip

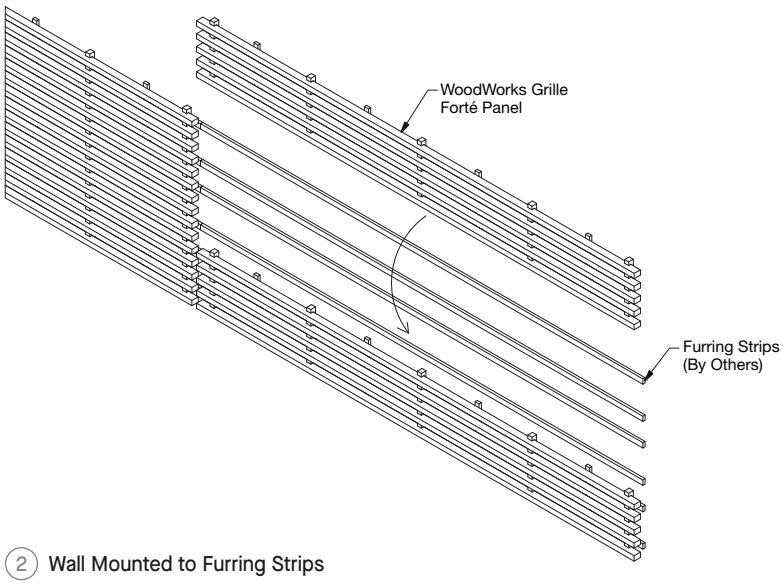

2 Wall Mounted to Furring Strips

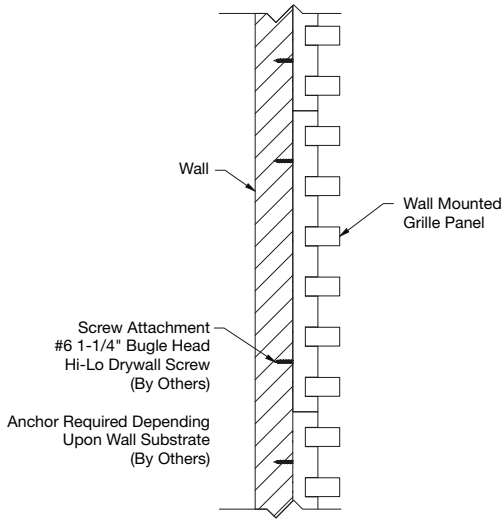

3 Wall Mounted Panel

PHYSICAL DATA

Material
Fire-rated particle board (FRPB) with real wood veneers. Vertical Grain Fir (NVF) is FRPB with a reconstituted veneer.

Surface Finish
Clear or tinted semi-gloss coating.

Fire Performance
Class A: ASTM E84 surface burning characteristics.

Flame Spread Index 25 or less. Smoke Developed Index 50 or less.

CAN/ULC S102 surface burning characteristics.

Flame Spread Rating 25 or less. Smoke Developed Classification 50 or less.

Design Considerations
Variation within panel and from panel to panel may occur due to the natural characteristics of the wood and grain.

When installed, there will be a 1" reveal between panel ends. Consider this when designing and laying out the wall and where this reveal will fall within your wall space.

Panel backers are black; consider installing panels on a dark wall or backdrop. If installation is at eye level or in direct light, a custom felt backer is recommended.

Custom options include different dimensions, species, and finishes.

Design & Pre-Construction Service
For complimentary design and pre-construction assistance, contact ProjectWorks® or visit armstrong.com/projectworks

Site Conditions
It is very important that panels are climatized prior to installation. Relative humidity between 25% and 55%, and temperatures between 50°F and 86°F, must be maintained.

Ordering Considerations
For projects with phased delivery, please coordinate orders. Each separate order is likely to be pulled from different lumber, and therefore will differ in terms of finish range from previous orders.

Be sure to account for extra material that is normally needed for wood installations. When installing WoodWorks® Grille – Forté panels, you should consider ordering at least 5% extra material. Up to 10% more may be needed for odd size or unique installations.

Seismic Restraint
WoodWorks Grille – Forté panels have been engineered, tested, and approved for application in all seismic areas when installed per Armstrong wall installation instructions.

Cleaning and Disinfecting
Cleaning and CDC approved disinfecting options available on armstrongceilings.com/cleaning

Warranty
Details at armstrong.com/warranty

Weight
Refer to Visual Selection chart.

TechLine / 877 276-7876
armstrongceilings.com/woodworksgrille

BPCS-6868-726

LEED® is a registered trademark of the U.S. Green Building Council; Living Building Challenge® (LBC) is a registered trademark of the International Living Future Institute; WELL™ and WELL Building Standard™ are trademarks of the International WELL Building Institute; Revit® is a registered trademark of Autodesk, Inc.; FSC® is a registered trademark of Forest Stewardship Council®, A.C., license code FSC-C007626; all other trademarks used herein are the property of AWI Licensing LLC and/or its affiliates © 2026 AWI Licensing LLC

Armstrong® World Industries