DynaMax® LT

Structural Aluminum
Suspension System



Technical Guide

Armstrong®
World Industries

Hang Tough

Meet DynaMax® LT Structural Grid

DynaMax® LT is a structural aluminum suspension system that serves as both a ceiling system and structural component by providing a suspension or attachment platform for cable trays, equipment, partitions and containment barriers while eliminating penetrations in the ceiling system.

For years, the typical construction method for data centers was to have a structural system, like slotted strut, to suspend heavy loads, then an acoustical ceiling to contain air flow and protect the equipment from debris. We have combined these two needs into one with DynaMax suspension systems. Our design provides strength, flexibility, construction efficiencies, and faster, easier installation.

DynaMax LT with X-Bracket and Hardware Kit





DynaMax® Structural Grid Data Center Installation

Table of Contents


4	Suspension System Components
5	How the System Works
6	Notched vs. Unnotched Cross Tees
7	Ceiling Panels for DynaMax® LT
8	Installation & Layout Overview
9	Seismic Considerations
10-14	Section Properties & Load vs. Deflection Plot
15-17	Loading Condition Examples
18-20	Integrated Lighting & MEP Partners



About the System

Suspension System Components

This structural aluminum suspension system, ideal for Colocation Data Centers, serves as both a ceiling system and a structural component by providing a suspension platform for cable trays, equipment, partitions and containment barriers-eliminating ceiling penetrations.

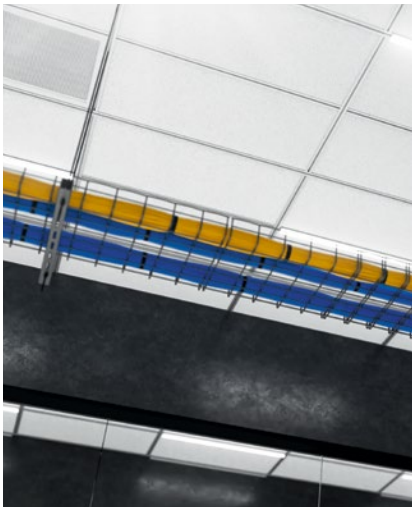

DynaMax LT Structural Aluminum Data Center Suspension System

For custom layout information and technical guidelines, contact TechLine customer support at 877 276-7876

Key Selection Attributes

- Ideal combination of a finished ceiling system with a structural solution
- Provides a suspension platform or attachment for data center cable trays, equipment, partitions and hot and cold aisle containment barriers from building structure to below the ceiling plane
- Finished ceiling system offers a containment barrier to protect servers from debris
- Integrates seamlessly with select Armstrong® ceiling panels for a complete ceiling system solution
- Supports up to a 800 lb. point load rating using 3/8"–16 threaded rod at 48" × 48" connection points
- Suspension system has continuous threaded boss channel, allowing 3/8"–16 threaded rod to be installed to the suspension system at any location
- Controls airflow by eliminating penetrations
- Available in 24" × 24", 24" × 48" and 48" × 48" suspension system layouts
- CNC override feature creates a tight fit minimizing air leakage between plenum and occupied space
- Fully accessible system allows for future expansion and upgrades
- Non-progressive installation gives the ability to remove or replace a section of the system without the need to dismantle those components around it
- Cross tees not bearing any load are removable for plenum access without compromising the structural integrity of the system
- 10-Year Limited Warranty; 30-Year Limited System Warranty
- X-Brackets installed on DynaMax LT grid provide attachment points for 48" × 48" suspension from building structure
- Grid provides increased temperature and pressure management, reduced leakage, and enables the best hot and cold air containment at the ceiling plane when compared to other ceiling types
- Available with Ultima® AirAssure® panels with factory-gasketed edges to provide even greater temperature and pressure management
- Lighting and diffuser options are available from our Data Center lighting and MEP partners
- Available DataZone™ panels are specifically sized for DynaMax suspension system
- new This product can be adjusted to comply with Build America, Buy America (BABA) requirements. Modifications to pricing and lead times may apply. Contact your local sales representative for additional information.


VISUAL SELECTION

PACKAGING


Item No.	Description	Dimensions (in.)	pcs./ctn.	ln. ft./ctn.
DynaMax LT Structural Aluminum Data Center Suspension System				
☐ DM2301	Main Beam	144 × 1-9/16" x 2-1/8"	4	48
☐ DM2320	2' Cross Tee	24 × 1-9/16" x 2-1/8"	12	24
☐ DM2340	4' Cross Tee	48 × 1-9/16" x 2-1/8"	12	48
☐ DM2340NC	4' Cross Tee – No Center Notch	48 × 1-9/16 × 2-1/8"	12	48
☐ DM2800	Perimeter Molding	144 × 1-15/32" x 2-1/8"	4	48

NOTE: Contact local engineer for job specific load and/or seismic requirements See data page for DynaMax LT gasketed item numbers

DETAILS



DynaMax LT Main Beam



DynaMax LT Perimeter Molding

LOAD DATA FOR DYNAMAX LT SUSPENSION SYSTEMS


Member Span and Spacing (inches)	48"
Maximum Allowable Uniform Area Load (lbs./sq. ft.)	50
Maximum Allowable (Yield/1.67) Mid-Span Point Load (lbs.)	345
Maximum Allowable (Ultimate/2.00) Mid-Span Point Load (lbs.)	470
Maximum Allowable Point Load (lbs.)	800
Turnbuckle Maximum Allowable Load (lbs.)	1,200

For additional load-carrying capability, ask your Armstrong® Rep about DynaMax® Plus Structural Grid System.

About the System


How the System Works

For additional information and technical guidelines,
contact TechLine at 877 276-7876 and select prompts 1-2-3.

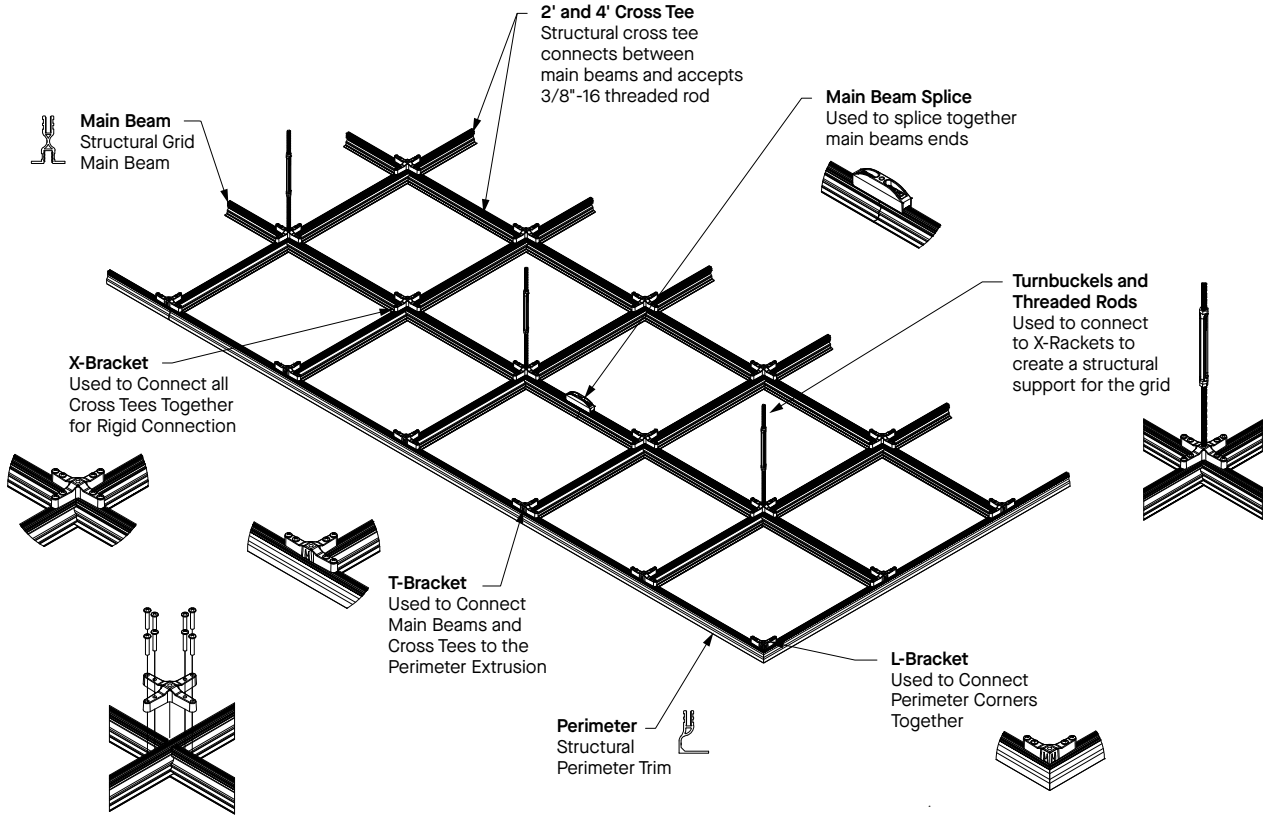


ACCESSORIES

DMXB – X-Bracket – Used to connect all cross tees together for rigid connection




DMXB – 24 pcs.

DMTB – T-Bracket – Used to connect main beams and cross tees to the perimeter extrusion




DMTB – 36 pcs.

DMLB – L-Bracket – Used to connect perimeter extrusion corners together




DMLB – 12 pcs.

DMMBS – Main Beam Splice – Used to splice together main beam ends



DMMBS – 24 pcs.

DMHWK – Hardware Kit – Turnbuckles and threaded rods are used to connect the X-brackets to the threaded rod to create a structural support for the grid.*




DMHWK – 12 pcs.

* 1/2" hardware kit available upon request.


OPTIONAL ACCESSORIES

DMMDHDC – DynaMax MD Hold-Down Clip – Attaches to the suspension system to hold Lay-in panels in place




DMMDHDC – 100 pcs.

DMIB – I-Bracket – Used for supplemental hanging locations




DMIB – 24 pcs.

DMLAK – Load Adaptor Plate – Bottom load plate for additional direct loads



DMLAK – 24 pcs.

DMLAK12 – Load Adaptor Plate 1/2" Rod – Bottom load plate for 1/2" rod for additional direct loads




DMLAK12 – 24 pcs.


Notched vs. Unnotched Cross Tees

On 2' × 2' layouts, use a 4' cross tee that utilizes a center notch.

2' × 2' DynaMax LT Module Layout

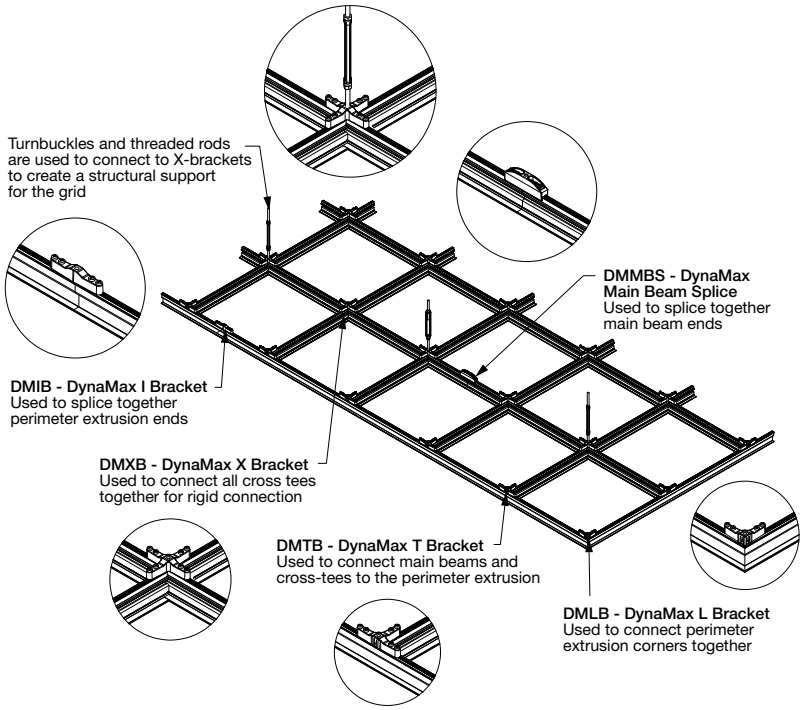


4' DynaMax LT Cross Tee: DM2340

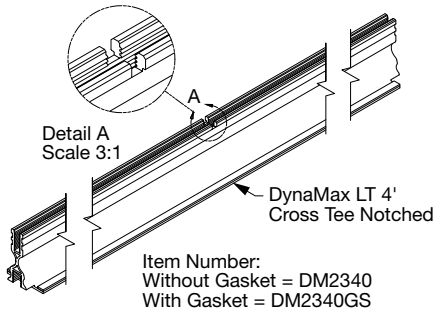


On 2' × 4' layouts, use a 4’ cross tee that **DOES NOT** have a center notch, since it’s not needed.

2' × 4' DynaMax LT Module Layout

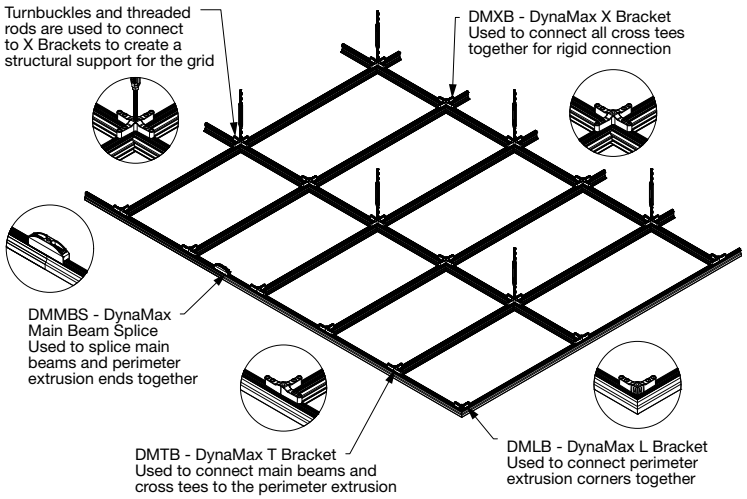

4' DynaMax LT Cross Tee: DM2340NC

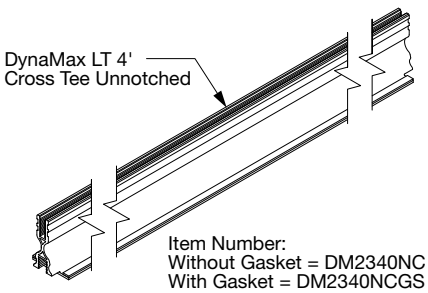

For 2' × 4' and 4' × 4' layouts, do not utilize center notch cross tees. We recommend a 4’ tee with the “NC” suffix.

Ceiling Panels for DynaMax® LT

Square Lay-in

Ceiling panels for DynaMax® LT are specifically designed for performance, reliability, and sustainability in data center and critical application environments.



DataZone™ panels with DynaMax® suspension system

KEY SELECTION ATTRIBUTES

DataZone™, Ultima® Templok®, and Ultima® AirAssure® for DynaMax®

- DataZone panels are part of the Sustain® portfolio, and meet the most stringent industry sustainability compliance standards today
- Get total noise control and floor plan versatility with Total Acoustics® ceiling panels: NRC + CAC = Total Acoustics performance
- Smooth, clean, durable finish – Washable, Impact-resistant, scratch-resistant, and soil-resistant
- Mold- and mildew-resistant surface
- 30-Year Limited System Warranty against visible sag, mold, and mildew
- Made in the U.S.A. of domestic and global content
- Build America, Buy America (BABA) Act compliant

Ultima® AirAssure® for DynaMax®

- Factory gasketed Ultima® AirAssure® panels for DynaMax®, DynaMax® LT, and DynaMax® Plus grid reduces air leakage and contributes to annual energy savings

Ultima® Templok® for DynaMax®

- Saves up to 15% energy*
- Provides 50 BTUs/SF of passive cooling*

Save 40% or 50% in Tax Credits
Templok® ceilings may qualify for Investment Tax Credits (ITC) under Inflation Reduction Act of 2022, Section 48E

Learn more at armstrong.com/saveontemplok

MetalWorks™ for DynaMax®


- CleanAssure™ family of products – includes disinfectable panels, suspension systems, and trim
- Perforated panel option available to enhance acoustical performance and design aesthetics
- Outstanding NRC with acoustical fleece or infill panel (0.70 – 0.85)
- Provides additional options when bidding data centers and structural applications
- Factory-fit ceiling panels eliminate the need to field modify panels in all standard suspension layouts

For more information about recommended ceiling panels, please visit **armstrong.com/structuralgrid**


Ceiling panels are specially sized and engineered for the DynaMax® suspension systems and must be used with these systems. These panels do not fit in other suspension systems.

* Data measured in lab tests, building energy modeling software, and field installations. Results may vary.


Installation

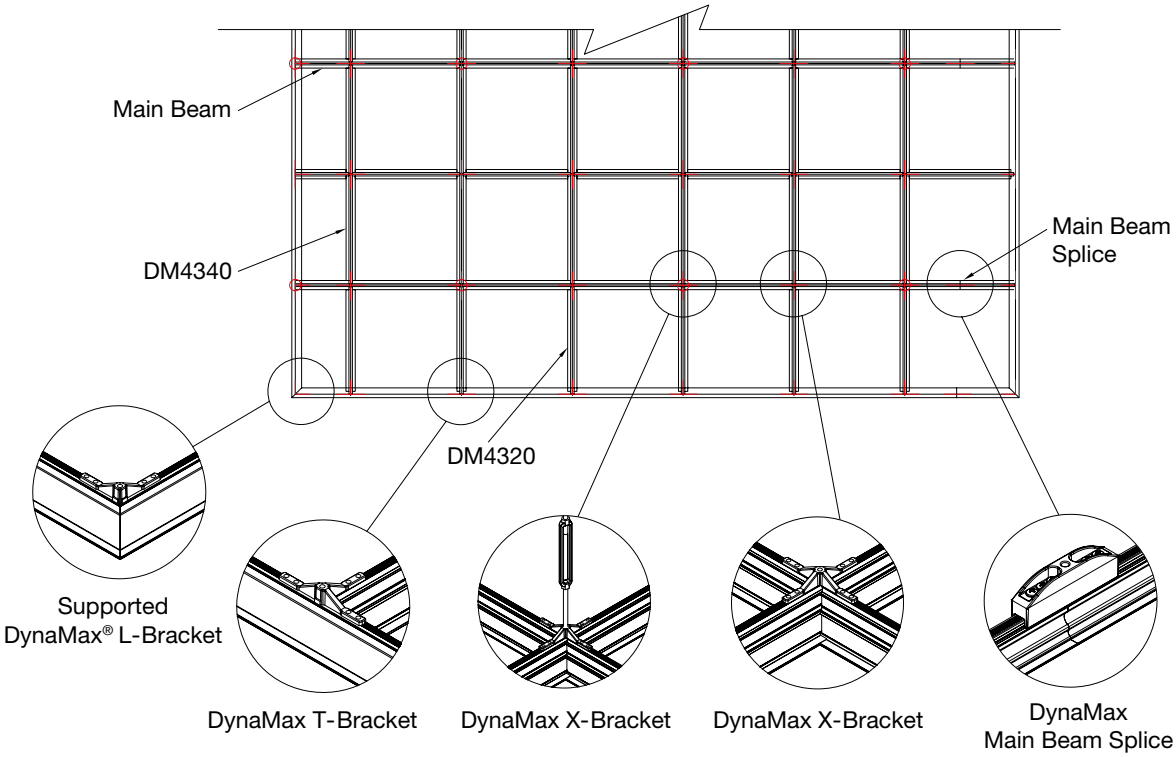


3/8" DynaMax® LT Threaded Channel Connection

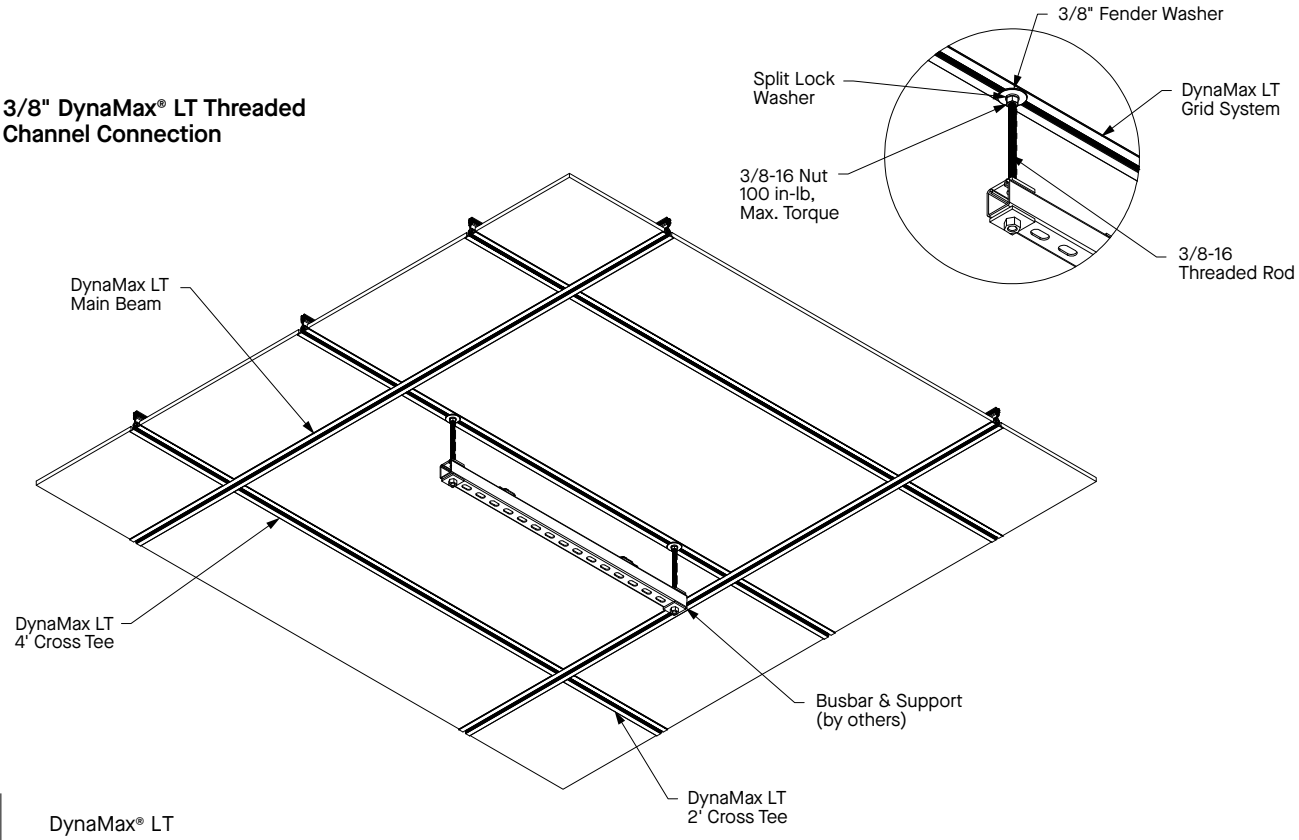

Seismic Considerations

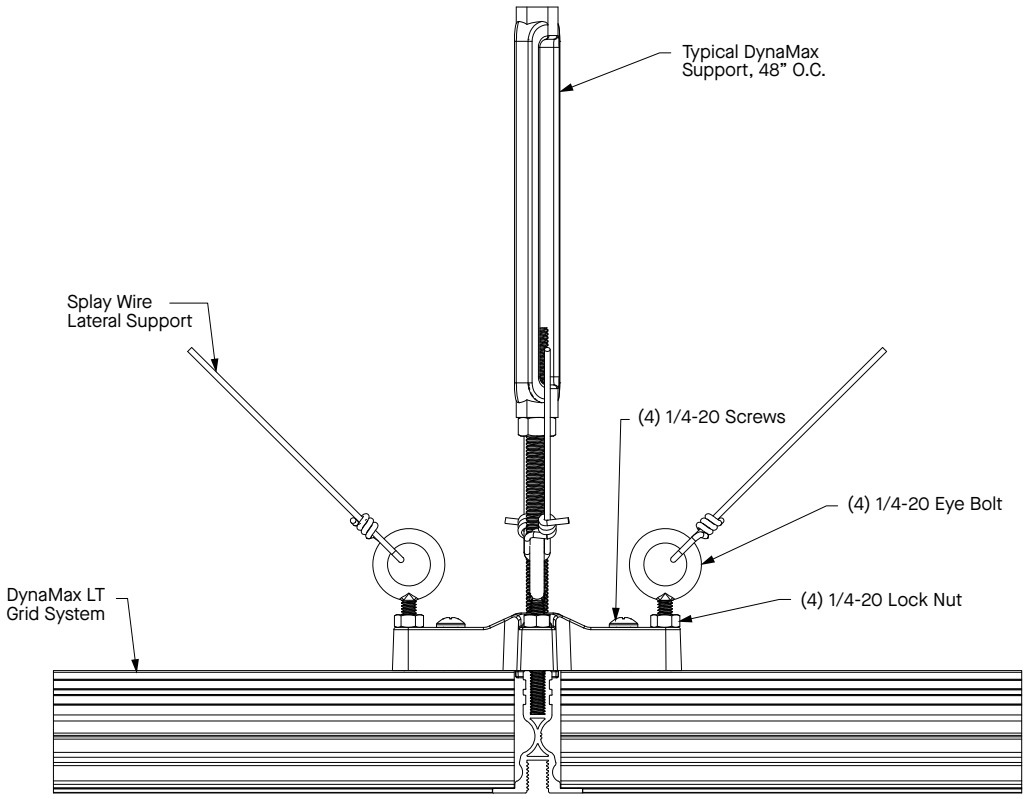

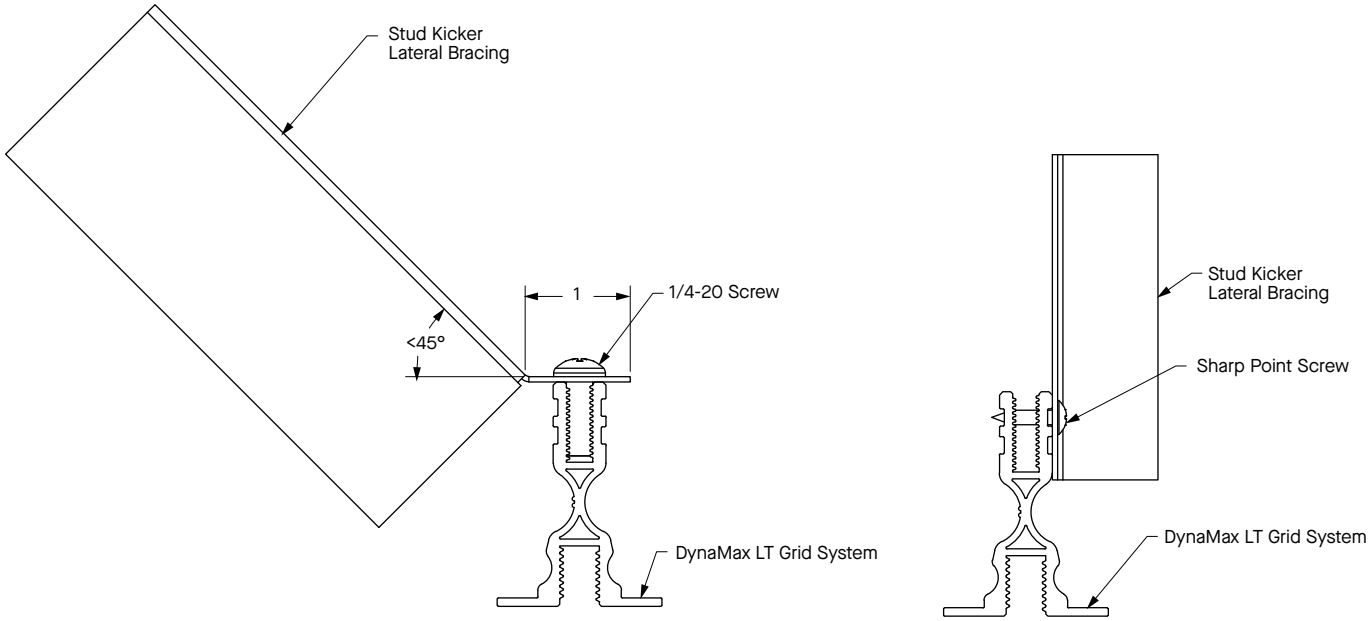

Section Properties

Find the full installation instructions here.

DynaMax® LT Section Properties

Area	Weight	Yield Strength	Modulus of Elasticity	Moment of Inertia	Radius of Gyration	Moment of Inertia	Radius of Gyration	Section Modulus		Maximum Bending Moment
Ab	Wb	Fy	E	Ix	Rx	Iy	Ry	Scx	Stx	[M]
($in.^2$)	(lbs./ft.)	(ksi)	($lbs./in.^2$)	($in.^4$)	(in.)	($in.^4$)	(in.)	($in.^3$)	($in.^3$)	(ft.-lb.)
0.591	0.696	31.0	1.00E+07	0.2766	0.6838	0.0434	0.2708	0.2232	0.3121	576.6

General Notes:

1 The data contained in this technical guide is intended to be used as a general guideline only and does not replace the design of a qualified engineer.

2 The load tables in this technical guide are calculated conservatively as single span (simple) beams supported at the ends.


3 The 'Load at Yield' is calculated as the maximum bending moment for each loading condition. The 'Allowable Load' is calculated by dividing the maximum bending moment by a safety factor of 1.67.

4 It is recommended that the DynaMax LT system is designed to limit the deflection of loaded members to L/360 of the span.

5 Load supported by DynaMax LT 3/8" threaded channel must not exceed the allowable load of 800 lbs.

6 Ultimate load is the maximum load the component can sustain before failure.

Load vs. Deflection Plot

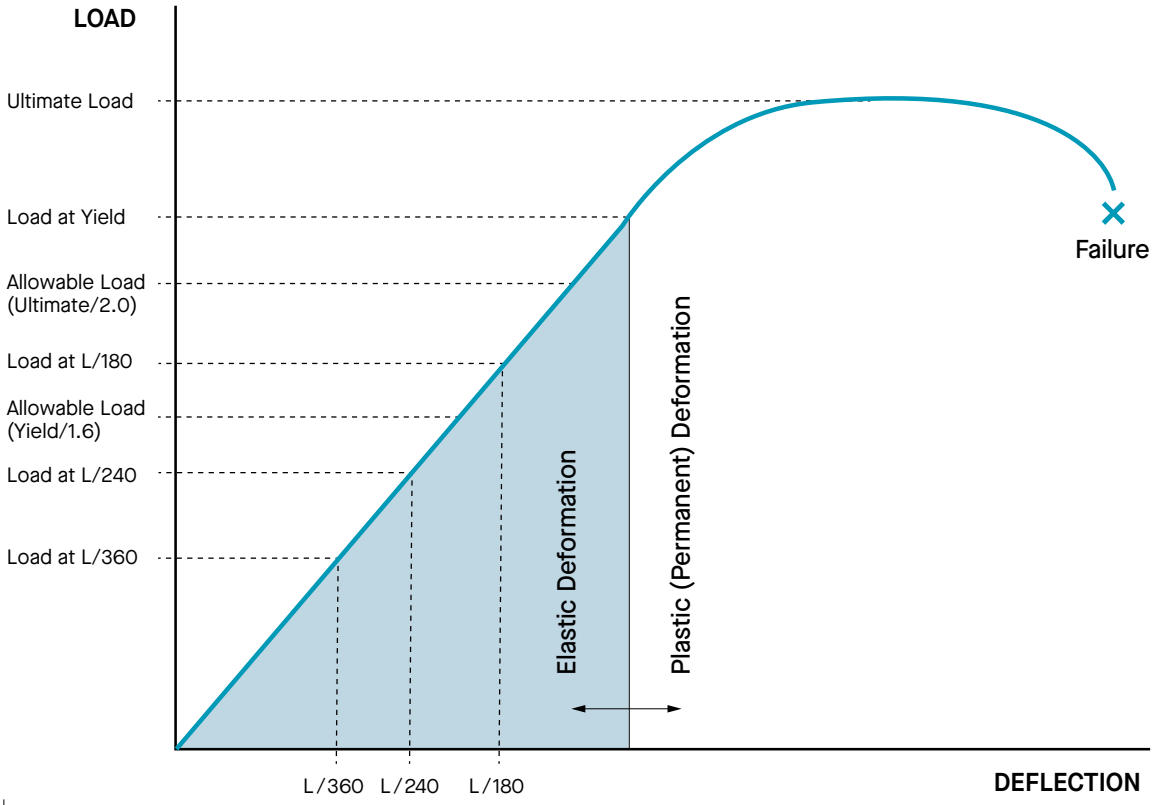

Load Data


DynaMax® LT Structural Aluminum Suspension System supports up to a 800 lbs. single point load rating using 3/8" threaded rod at 4' × 4' connection points assuming loads applied under threaded rod support brackets.



Concentrated Point Load

Span (ft.)	Load at Yield	Point Load, F (lbs.) Max. Allowable Load	Load at Deflection Limit L/90	L/180	L/240	L/360
2	1600	800	800	800	800	800
3	1600	800	800	800	800	800
4	1600	800	800	800	800	800
5	1600	800	800	800	800	800
6	1600	800	800	800	800	800

NOTE: Load aligned directly under bracket support



$\Delta_{max} = F L^3 / (48 E I)$

$M_{max} = F L / 4$

Concentrated Mid-Span Point Load

Span (ft.)	Load at Yield	Mid-Span Point Load, F (lbs.) Max. Allowable Load	Load at Deflection Limit L/90	L/180	L/240	L/360
2	1150	689	689	689	689	640
3	760	455	455	455	420	280
4	570	341	341	341	240	160
5	460	275	275	200	150	100
6	380	228	228	140	100	70


Uniform Area Load
(point loading divided by tributary area)

Main Beam Spacing (ft.)	Span (ft.)	Area (sq. ft.)	Uniform Area Load (lbs./sq. ft.) Load at Yield	Max. Allowable Load	L/180	L/240	L/360
2	4	8	200.0	100.0	100.0	100.0	100.0
	5	10	160.0	80.0	80.0	80.0	80.0
	6	12	133.3	66.6	66.6	66.6	66.6
	7	14	114.2	57.1	57.1	57.1	57.1
	8	16	100.0	50.0	50.0	50.0	50.0
4	4	16	100.0	50.0	50.0	50.0	50.0
	5	20	80.0	40.0	40.0	40.0	40.0
	6	24	66.6	33.3	33.3	33.3	33.3
	7	28	57.1	28.5	28.5	28.5	28.5
	8	32	50.0	25.0	25.0	25.0	25.0

Uniform Area Load
(point loading divided by tributary area)

Main Beam Spacing (ft.)	Span (ft.)	Area (sq. ft.)	Uniform Area Load (lbs./sq. ft.) Load at Yield	Max. Allowable Load	L/180	L/240	L/360
2	4	8	71.2	42.6	42.6	30.0	20.0
	5	10	46.0	27.5	20.0	15.0	10.0
	6	12	31.6	18.9	11.6	8.3	5.8
	7	14	22.8	13.6	7.1	5.0	3.5
	8	16	17.5	10.4	5.0	3.7	2.5
4	4	16	35.6	21.3	21.3	15.0	10.0
	5	20	23.0	13.7	10.0	7.5	5.0
	6	24	15.8	9.4	5.8	4.1	2.9
	7	28	11.4	6.8	3.5	2.5	1.7
	8	32	8.7	5.2	2.5	1.8	1.2

Load Data



$\Delta_{max} = F L^3 / (48 E I)$


$M_{max} = F L / 4$

Dual Point Load
(equidistant from supports at 1/4 points)

			Dual Point Load at 1/4 Points, F (lbs.)				
				Load at Deflection Limit			
Span (ft.)	Point Loading Location, a (in.)	Load at Yield	Max. Allowable Load	L/90	L/180	L/240	L/360
24	6	1150	689	689	689	689	460
36	9	760	455	455	410	310	200
48	12	570	341	341	230	170	110
60	15	460	275	275	140	110	70
72	18	380	228	200	100	70	50

Uniform Area Load
(point loading divided by tributary area)

			Uniform Area Load (lbs./sq. ft.)				
Main Beam Spacing (ft.)	Span (ft.)	Area (sq. ft.)	Load at Yield	Max. Allowable Load	L/180	L/240	L/360
2	4	8	142.4	85.2	85.2	42.4	27.4
	5	10	92.0	55.0	28.0	22.0	14.0
	6	12	63.2	37.8	16.6	11.6	8.2
	7	14	45.6	27.2	10.0	7.0	4.2
	8	16	35.0	20.8	6.2	5.0	2.4
4	4	16	71.2	42.6	42.6	21.2	13.6
	5	20	46.0	27.4	14.0	11.0	7.0
	6	24	31.6	18.8	8.2	5.8	4.0
	7	28	22.8	13.6	5.0	3.4	2.0
	8	32	17.4	10.4	3.0	2.4	1.2

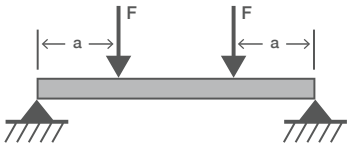

$\Delta_{max} = (F a / (24 E I)) \cdot (3 L^2 - 4 a^2)$

$M_{max} = F a$


Dual Point Load
(equidistant from supports at 1/8 points)

			Dual Point Load at 1/8 Points, F (lbs.)				
				Load at Deflection Limit			
Span (ft.)	Point Loading Location, a (in.)	Load at Yield	Max. Allowable Load	L/90	L/180	L/240	L/360
24	3	1600	800	800	800	800	800
36	4.5	1530	800	800	770	580	380
48	6	1150	689	689	430	320	210
60	7.5	920	551	550	270	200	130
72	9	760	455	380	190	140	90

Uniform Area Load
(point loading divided by tributary area)

			Uniform Area Load (lbs./sq. ft.)				
Main Beam Spacing (ft.)	Span (ft.)	Area (sq. ft.)	Load at Yield	Max. Allowable Load	L/180	L/240	L/360
2	4	8	287.4	172.0	172.0	80.0	52.4
	5	10	184.0	110.0	54.0	40.0	26.0
	6	12	126.6	75.8	31.6	23.2	15.0
	7	14	92.8	55.6	20.0	14.2	10.0
	8	16	71.2	42.6	12.4	10.0	6.2
4	4	16	143.6	86.0	86.0	40.0	26.2
	5	20	92.0	55.0	27.0	20.0	13.0
	6	24	63.2	37.8	15.8	11.6	7.4
	7	28	46.4	27.8	10.0	7.0	5.0
	8	32	35.6	21.2	6.2	5.0	3.0

Load Data



$\Delta_{max} = (F\ b\ (L^2 - b^2)^{(3/2)}) / (9 \cdot 3^{(1/2)}\ L\ E\ I)$


$M_{max} = F\ a\ b / L$

Concentrated Point Load
(point load within 3" of support)

Span (ft.)	Point Loading Location, b (in.)	Load at Yield	Point Load within 3" of Support, F (lbs.) Max. Allowable Load	Load at Deflection Limit L/90	L/180	L/240	L/360
24	3	1600	800	800	800	800	800
36	3	1600	800	800	800	800	800
48	3	1600	800	800	800	800	800
60	3	1600	800	800	800	800	800
72	3	1600	800	800	800	800	800

Uniform Area Load
(point loading divided by tributary area)

Main Beam Spacing (ft.)	Span (ft.)	Area (sq. ft.)	Uniform Area Load (lbs./sq. ft.) Load at Yield	Max. Allowable Load	L/180	L/240	L/360
2	4	8	200.0	100.0	100.0	100.0	100.0
	5	10	160.0	80.0	80.0	80.0	66.0
	6	12	133.3	66.6	66.0	66.0	45.8
	7	14	114.2	57.1	57.1	50.7	33.5
	8	16	100.0	50.0	50.0	38.7	25.6
4	4	16	100.0	50.0	50.0	50.0	50.0
	5	20	80.0	40.0	40.0	40.0	33.0
	6	24	66.6	33.3	33.3	33.3	22.9
	7	28	57.1	28.5	28.5	25.3	16.7
	8	32	50.0	25.0	25.0	19.3	12.8



$\Delta_{max} = (F\ b\ (L^2 - b^2)^{(3/2)}) / (9 \cdot 3^{(1/2)}\ L\ E\ I)$

$M_{max} = F\ a\ b / L$


Concentrated Point Load
(point load within 6" of support)

Span (ft.)	Point Loading Location, b (in.)	Load at Yield	Point Load within 6" of Support, F (lbs.) Max. Allowable Load	Load at Deflection Limit L/90	L/180	L/240	L/360
24	6	1530	800	800	800	800	800
36	6	1380	800	800	800	800	570
48	6	1310	784	784	784	630	420
60	6	1280	766	766	670	500	330
72	6	1250	749	749	560	420	280

Uniform Area Load
(point loading divided by tributary area)

Main Beam Spacing (ft.)	Span (ft.)	Area (sq. ft.)	Uniform Area Load (lbs./sq. ft.) Load at Yield	Max. Allowable Load	L/180	L/240	L/360
2	4	8	163.7	98.0	98.0	78.7	52.5
	5	10	128.0	76.6	67.0	50.0	33.0
	6	12	104.1	62.3	46.6	35.0	23.3
	7	14	88.5	53.0	33.5	25.0	16.4
	8	16	76.8	46.0	25.6	19.3	12.5
4	4	16	81.8	49.0	49.0	39.3	26.2
	5	20	64.0	38.3	33.5	25.0	16.5
	6	24	52.0	31.1	23.3	17.5	11.6
	7	28	44.2	26.5	16.7	12.5	8.2
	8	32	38.4	23.0	12.8	9.6	6.2

Load Data



$\Delta_{max} = (F\ b\ (L^2 - b^2)^{(3/2)}) \ / \ (9 \cdot 3^{(1/2)}\ L\ E\ I)$


$M_{max} = F\ a\ b \ / \ L$

Concentrated Point Load
(point load within 12" of support)

			Point Load within 12" of Support, F (lbs.)				
Span (ft.)	Point Loading Location, b (in.)	Load at Yield	Max. Allowable Load	Load at Deflection Limit			
				L/90	L/180	L/240	L/360
24	12	1150	689	689	689	689	640
36	12	860	515	515	515	490	330
48	12	760	455	455	455	340	220
60	12	720	431	431	350	260	170
72	12	690	413	413	280	210	140

Uniform Area Load
(point loading divided by tributary area)

			Uniform Area Load (lbs./sq. ft.)				
Main Beam Spacing (ft.)	Span (ft.)	Area (sq. ft.)	Load at Yield	Max. Allowable Load	L/180	L/240	L/360
2	4	8	95.0	56.8	56.8	42.5	27.5
	5	10	72.0	43.1	35.0	26.0	17.0
	6	12	57.5	34.4	23.3	17.5	11.6
	7	14	47.8	28.6	17.1	12.8	8.5
	8	16	40.6	24.3	13.1	9.3	6.2
4	4	16	47.5	28.4	28.4	21.2	13.7
	5	20	36.0	21.5	17.5	13.0	8.5
	6	24	28.7	17.2	11.6	8.7	5.8
	7	28	23.9	14.3	8.5	6.4	4.2
	8	32	20.3	12.1	6.5	4.6	3.1



$\Delta_{max} = (F\ b\ (L^2 - b^2)^{(3/2)}) \ / \ (9 \cdot 3^{(1/2)}\ L\ E\ I)$

$M_{max} = F\ a\ b \ / \ L$

Concentrated Point Load
(point load within 18" of support)


			Point Load within 18" of Support, F (lbs.)				
Span (ft.)	Point Loading Location, b (in.)	Load at Yield	Max. Allowable Load	Load at Deflection Limit			
				L/90	L/180	L/240	L/360
24	18	1530	800	800	800	800	800
36	18	760	455	455	455	420	280
48	18	610	365	365	365	260	170
60	18	540	323	323	250	190	120
72	18	510	305	305	200	150	100

Uniform Area Load
(point loading divided by tributary area)


			Uniform Area Load (lbs./sq. ft.)				
Main Beam Spacing (ft.)	Span (ft.)	Area (sq. ft.)	Load at Yield	Max. Allowable Load	L/180	L/240	L/360
2	4	8	76.2	45.6	45.6	33	21.2
	5	10	54.0	32.3	25	19	12.0
	6	12	42.5	25.4	17	12.5	8.3
	7	14	34.2	20.5	11	8.5	5.7
	8	16	29.3	17.5	8.7	6.2	4.3
4	4	16	38.1	22.8	22.8	16	10.6
	5	20	27.0	16.1	13	10	6.0
	6	24	21.2	12.7	8	6.2	4.1
	7	28	17.1	10.2	6	4.2	2.8
	8	32	14.6	8.7	4.3	3.1	2.1

Loading Condition Examples


NOTE: Loading condition examples are shown with maximum allowable loads.

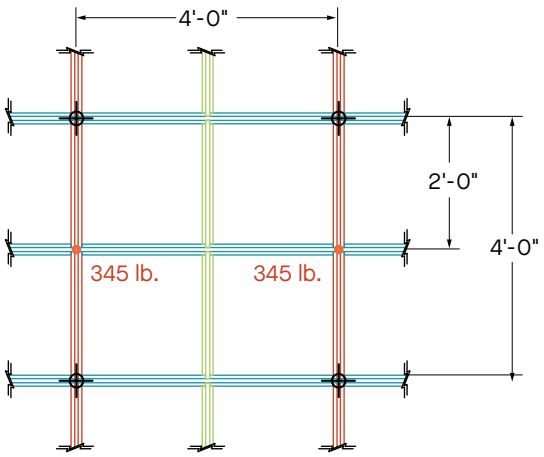


4' × 4' Support Spacing
Main Beam
Mid-Span Loading

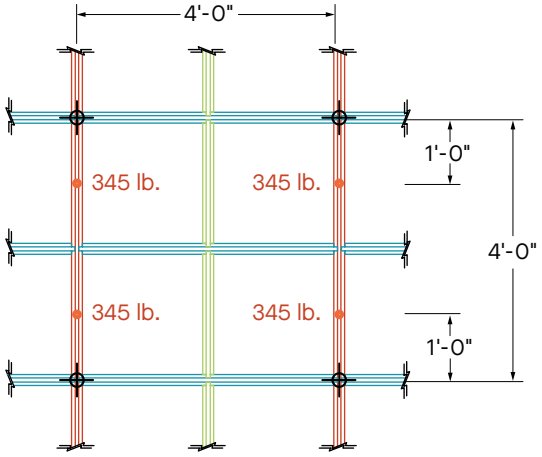


4' × 4' Support Spacing
Main Beam Dual Point Loads
at 1/4 Points

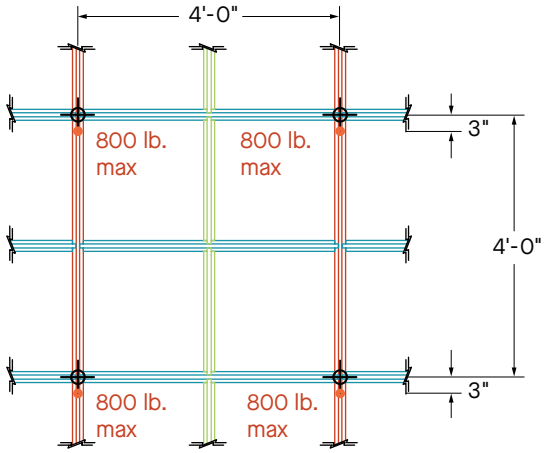

4' × 4' Support Spacing
Main Beam Point Load
within 3" of Support

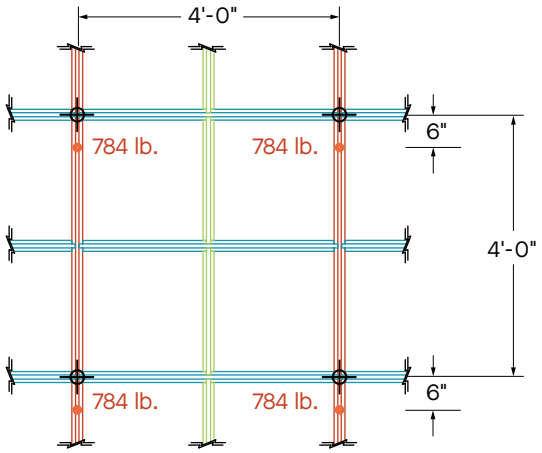


4' × 4' Support Spacing
Main Beam Point Load
within 6" of Support




Loading Condition Examples


NOTE: Loading condition examples are shown with maximum allowable loads.

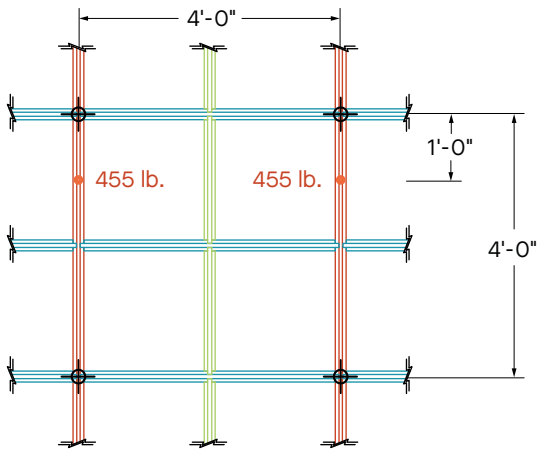


4' × 4' Support Spacing
Main Beam Point Load
within 12" of Support

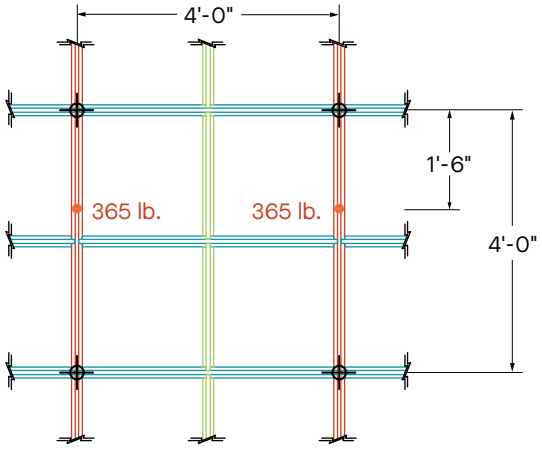


4' × 4' Support Spacing
Main Beam Point Load
within 18" of Support

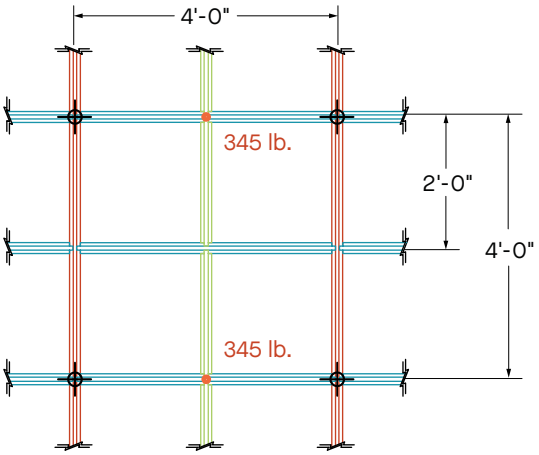

4' × 4' Support Spacing
4' Cross Tee
Mid-Span Loading

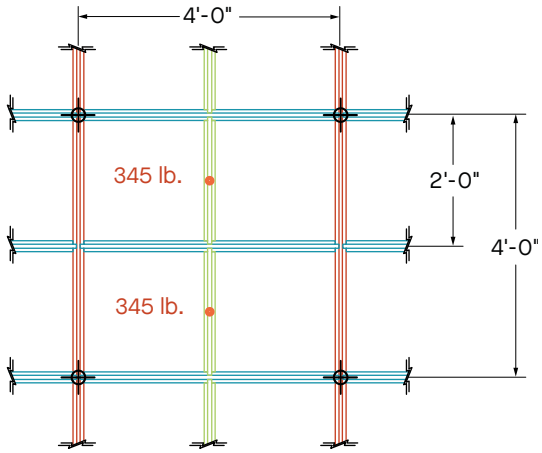


4' × 4' Support Spacing
2' Cross Tee
Mid-Span Loading




Loading Condition Examples


NOTE: Loading condition examples are shown with maximum allowable loads.

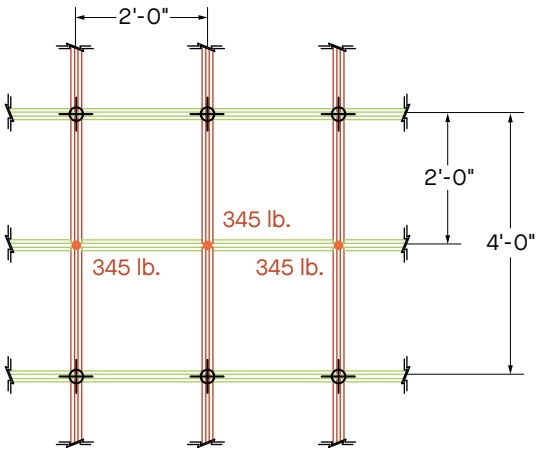


4' × 2' Support Spacing
Main Beam
Mid-Span Loading

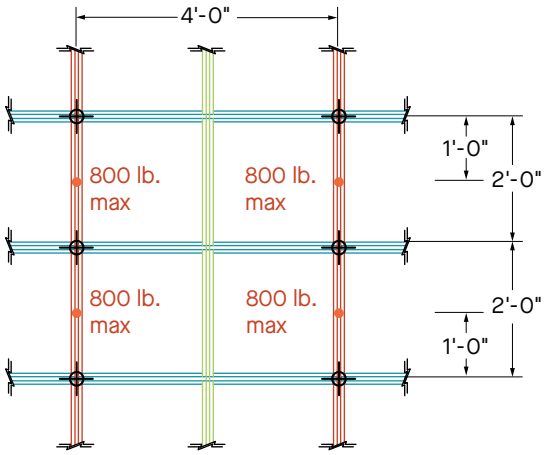

2' × 4' Support Spacing
Main Beam
Mid-Span Loading

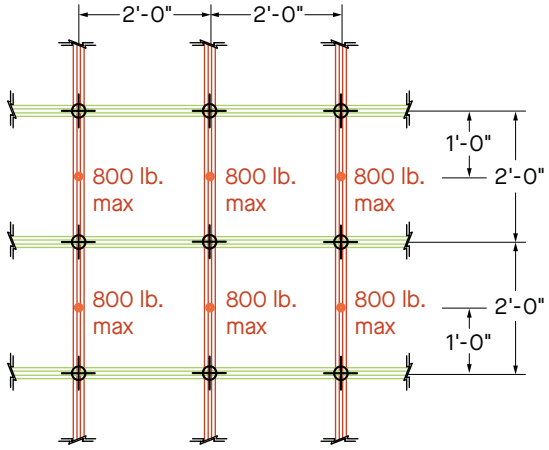

2' × 2' Support Spacing
Main Beam
Mid-Span Loading




Partner Solutions for DynaMax® LT


Integrated Lighting Partners

Lighting and diffuser solutions are available through partner companies.


NOTE: In the section that follows, standard DynaMax MD grid is featured in the partner drawings; however, these partner solutions are all compatible with DynaMax LT.

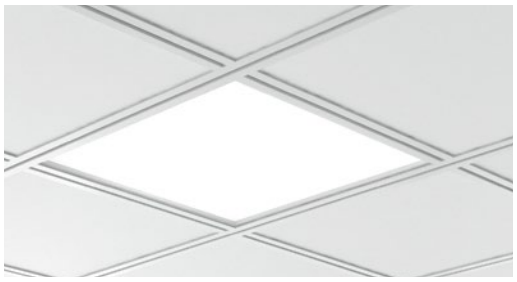


TRAYFIT™ 2 × 2

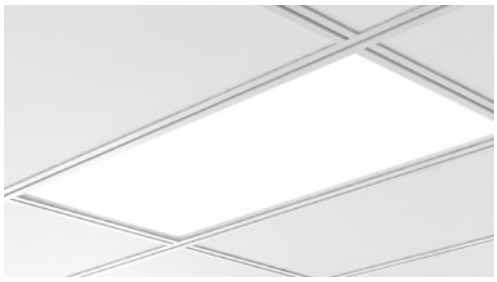


TRAYFIT™ 2 × 4

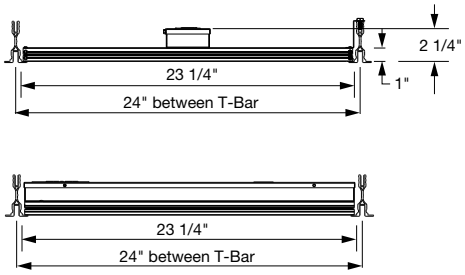




Detail View

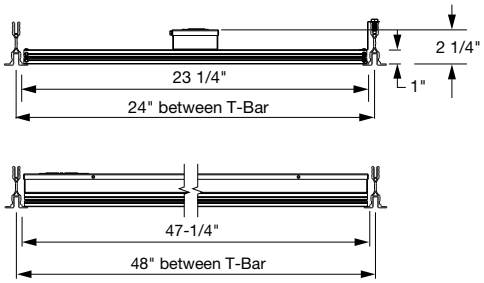


For compatible lighting details, visit **axislighting.com**

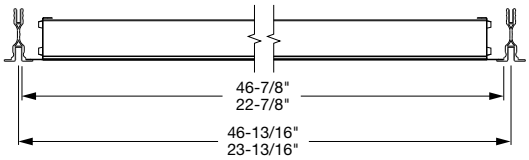



PTDC – Shallow Plenum LED Troffer for DynaMax System

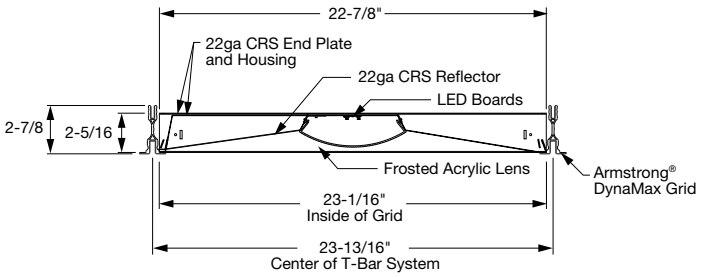


For compatible lighting details, visit **hew.com/products/PTDC**

Partner Solutions for DynaMax® LT

Integrated Lighting Partners

Lighting and diffuser solutions are available through partner companies.

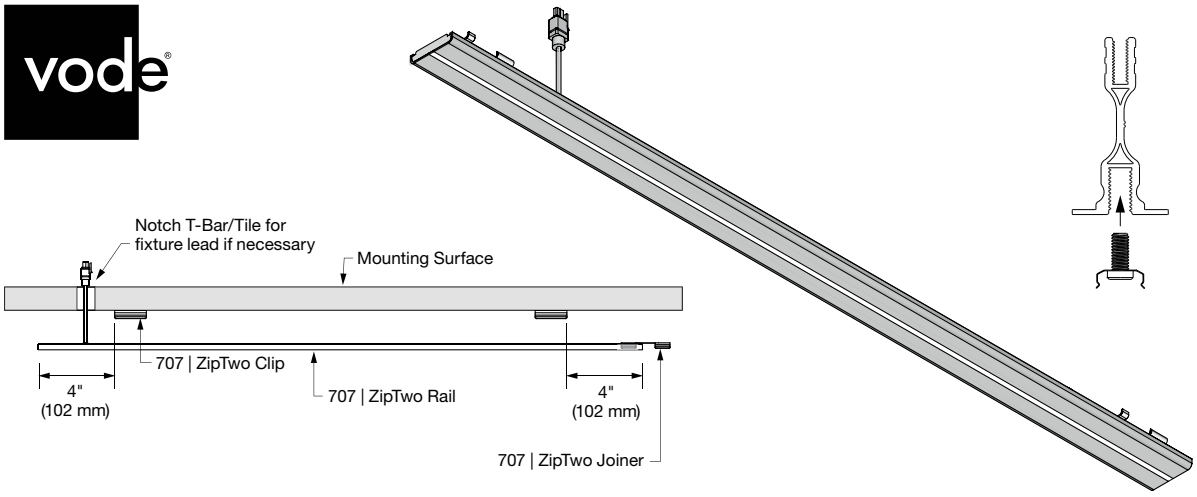



ZipTwo™ Data Center Solutions


For compatible lighting details, visit **vode.com/dynamax**



TERALyte™ 2" for the DynaMax® grid system

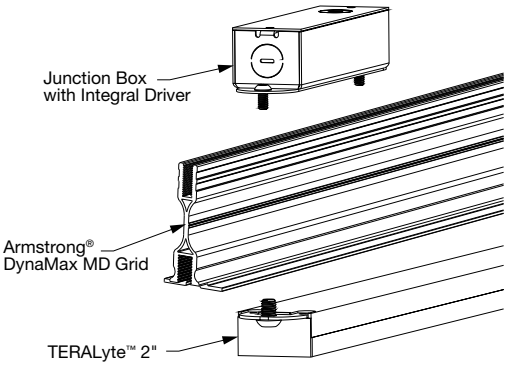

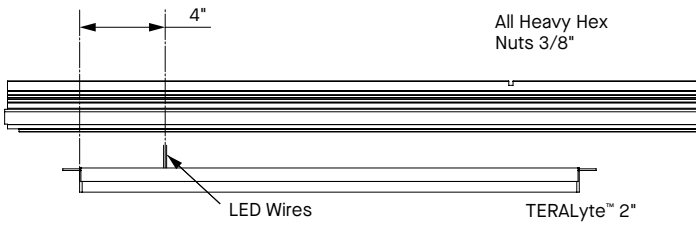





For compatible lighting details, visit **jlc-tech.com**

Partner Solutions for DynaMax® LT

Integrated MEP Partners

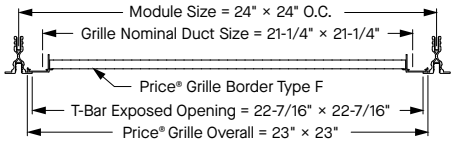

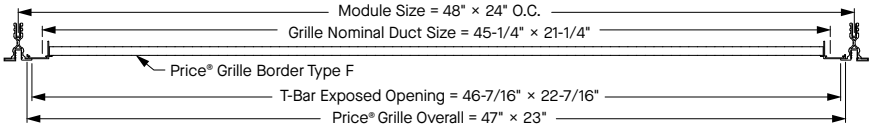




Eggcrate Air Device –
Price Model 80 Border F



Perforated Air Device –
Price Model 10 Border F

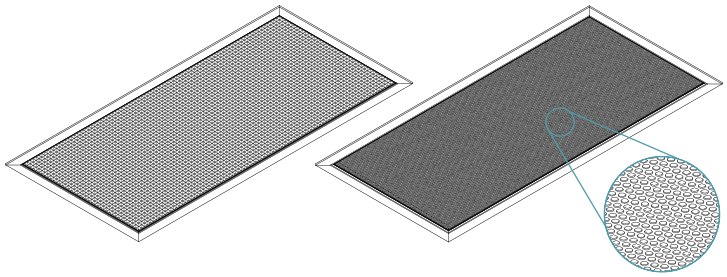

Eggcrate Air Device –
Price Model 80 Border F

Perforated Air Device –
Price Model 10 Border F

For compatible diffuser details, visit **priceindustries.com/diffusers**

The Next Step

877 276-7876

Customer Service Representatives
7:45 a.m. to 5:00 p.m. ET, Monday through Friday

TechLine – Technical information, detail drawings, CAD design assistance, installation information, other technical services – 8:00 a.m. to 5:30 p.m. ET, Monday through Friday.

Email: techline@armstrong.com

armstrong.com/commercial

Latest product news

Standard and custom product information

CAD, Revit®, SketchUp® files

A Ceiling for Every Space® Visual Selection Tool

Product literature and samples – express service or regular delivery

Contacts – reps, where to buy, who will install

ProjectWorks®

armstrong.com/projectworks

The power of ProjectWorks® Design and Pre-construction Service

ProjectWorks offers cutting-edge collaborative design services to ensure your projects are completed with unmatched precision and efficiency.

Receive 2D layouts, material budgets, and detailed 3D Revit® models to speed up project timelines and improve coordination.

Design with confidence. Partner with ProjectWorks today! Get started at armstrong.com/projectworks

armstrong.com/datacenters

SketchUp® is a registered trademark of Trimble Navigation Limited; Revit® is a registered trademark of Autodesk, Inc; RAL is a registered trademark of RAL gGmbH; Axis logo and TRAYFIT™ are trademarks of Axis Lighting Inc; JLC-Tech logo and TERALyte™ are trademarks of JLC-Tech, LLC; Price® is a trademark of Price Industries; Vode® and ZipTwo® are trademarks of Vode Lighting LLC; H.E. Williams® logo is a registered trademark of H.E. Williams, Inc.
All other trademarks used herein are the property of AWI Licensing LLC and/or its affiliates.
© 2026 AWI Licensing LLC Printed in the United States of America

Armstrong®
World Industries

BPCS-7405-1026