METALWORKS™ Linear – Classics

Interior & Exterior
smooth texture

SUSTAIN™
High Performance
Sustainable
Ceiling Systems


FAST 4 WEEKS or Less

FAST134
Select Items Ship Fast
armstrongceilings.com/fast134



MetalWorks™ Linear – Classics ceiling system in Effects™ Walnut Espresso with custom color filler strips

CAD/Revit® drawings at:
armstrongceilings.com/cadrevit

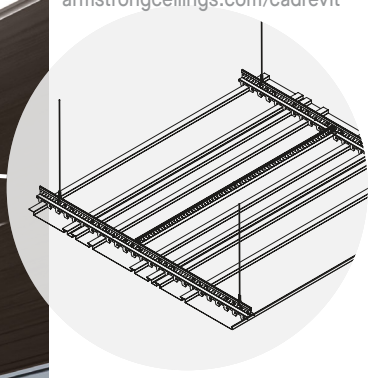

plus capabilities to do more



armstrongceilings.com/capabilities
See more photos at:
armstrongceilings.com/photogallery

Durable, metal panels in more widths for a variety of flexible and unique acoustical interior/exterior solutions.

KEY SELECTION ATTRIBUTES

- Four Sequels™ pre-coat, wood-look finishes are part of the Sustain™ portfolio and FAST134 program
- MetalWorks™ FASTPeel™ panels feature an easier-to-remove protective film
- Universal suspension system enables easy installation and a clean finished visual
- Nominal 2", 4", 6", 8", 10", and 12" wide panels, including nominal 1" reveal (contact ASQuote for custom capabilities at asquote@armstrongceilings.com)
- Available in 17 Effects™ Wood look finishes that are part of the Sustain portfolio
- MetalWorks™ Linear – Classics panels are part of the Sustain™ portfolio, and meet the most stringent industry sustainability compliance standards today
- Discontinuous ceilings possible with Effects™ trim or Axiom® trim, using the Adjustable Trim Clip
- Mix and match widths for a striated visual
- CleanAssure™ family of products – includes disinfectable panels, suspension systems, and trim
- Select products included in the FAST134 program – ready to ship in 4 weeks or less
- Install in the ceiling, on the wall
- Create 90° angled or curved ceiling-to-wall transitions
- Available for exterior applications when using M1 planks. Tested to meet wind uplift Classes 30, 60, 90

new

- Acoustical options with microperforated panels
- Fast and easy installation
- This product can be adjusted to comply with Build America, Buy America (BABA) requirements. Modifications to pricing and lead times may apply. Contact your local sales representative for additional information.

METALWORKS™ Linear – Classics

Interior & Exterior
smooth texture

SUSTAIN™
High Performance
Sustainable Ceiling Systems

Declare.

RECYCLED CONTENT
UP TO 35%

LEED V5

COMMON MATERIALS FRAMEWORK		Climate Health	EPD
Human Health	Declare Label	Ecosystem Health	EPD
	HPD		
	3rd Party CDPH	Circular Economy	✓
OCCUPANT EXPERIENCE		Acoustics	✓



MetalWorks™ Linear – Classics Ceiling System with 4" Perforated and Unperforated panels in White

STANDARD COLORS & FINISHES

Painted

White
Interior & Exterior: (WH2)


Silver Grey
Interior & Exterior: (SG2)


Gun Metal Grey
Interior & Exterior: (MY2)

Sequels™ (Interior only)
Pre-coated Coil, Fast Lead Time


La Jolla Oak (SQOK)


New Haven Walnut (SQWN)


Cape May Cherry (SQCH)


Montauk Driftwood (SQGY)

Effects™ Classic
Dye-Sublimation


Effects Cherry
Interior: (FXCH)
Exterior: (FXCH2)


Effects Dark Cherry
Interior: (FXDC)
Exterior: (FXDC2)


Effects Oak
Interior: (FXOK)
Exterior: (FXOK2)


Effects Walnut
Interior: (FXWN)
Exterior: (FXWN2)


Effects Walnut Espresso
Interior: (FXWE)
Exterior: (FXWE2)

Effects™ Bold
Dye-Sublimation


Effects Sea Salt
Interior: (FXSS)
Exterior: (FXSS2)


Effects Ginger
Interior: (FXGR)
Exterior: (FXGR2)


Effects Nutmeg
Interior: (FXNM)
Exterior: (FXNM2)


Effects Poppy Seed
Interior: (FXPS)
Exterior: (FXPS2)


Effects Peppercorn
Interior: (FXPC)
Exterior: (FXPC2)


Effects Almond
Interior: (FXAL)
Exterior: (FXAL2)

Effects™ Subtle
Dye-Sublimation


Effects Sesame
Interior: (FXSE)
Exterior: (FXSE2)


Effects Macadamia
Interior: (FXMA)
Exterior: (FXMA2)


Effects Cinnamon
Interior: (FXCM)
Exterior: (FXCM2)


Effects Flax
Interior: (FXFL)
Exterior: (FXFL2)


Effects Cocoa Bean
Interior: (FXCB)
Exterior: (FXCB2)


Effects Coriander
Interior: (FXCO)
Exterior: (FXCO2)

Due to printing limitations, shade may vary from actual product.

CUSTOM COLORS & FINISHES


Custom Colors Available



Custom Wood-look Finishes Available

Standard colors are pre-qualified for Sustain portfolio requirements. Custom or made-to-order colors must be evaluated separately when Sustain compliance is required.

For custom options contact ASQuote, ASQuote@armstrongceilings.com

PERFORATION OPTIONS (1:2 scale shown)

M1
(Unperforated)


M2
(Microperforated)

NOTE: Exterior planks available in M1 perforation only

TechLine 877 276-7876
armstrongceilings.com/metalworkslinear

Armstrong® World Industries

METALWORKS™ – Standard

METALWORKS™ Linear – Classics

Interior & Exterior
smooth texture

SUSTAIN™
High Performance
Sustainable Ceiling Systems

Declare.

RECYCLED CONTENT
UP TO **35%**

LEED V5

COMMON MATERIALS FRAMEWORK			
Human Health	Declare Label	Climate Health	EPD
	HPD	Ecosystem Health	EPD
	3rd Party CDPH	Circular Economy	✓
OCCUPANT EXPERIENCE		Acoustics	✓

VISUAL SELECTION

PERFORMANCE
Dots represent high level of performance.

	Item No. ◆	Description	Dimensions Nominal W × L × H (Inches) Custom Lengths Available	Fire Performance	Light Reflect (White only)	CleanAssure™ Disinfectable Panels: Fog	Spray	Wipe	DURABILITY: Wash	Scrub	Impact	Scratch	Acoustics
METALWORKS™ Linear – Classics Planks Interior & Exterior**	**8120**_ _ _ _ _	2" Unperforated	96 × 2 × 5/8"	Class A	0.73	•	•	•	•	•	•	•	N/A
	5490_ _ _ _ _	4" Unperforated	96 × 4 × 5/8"	Class A	0.73	•	•	•	•	•	•	•	N/A
	7160_ _ _ _ _	6" Unperforated	96 × 6 × 5/8"	Class A	0.73	•	•	•	•	•	•	•	N/A
	5491_ _ _ _ _	8" Unperforated	96 × 8 × 5/8"	Class A	0.73	•	•	•	•	•	•	•	N/A
	8122_ _ _ _ _	10" Unperforated	96 × 10 × 5/8"	Class A	0.73	•	•	•	•	•	•	•	N/A
	5570_ _ _ _ _	12" Unperforated	96 × 12 × 5/8"	Class A	0.73	•	•	•	•	•	•	•	N/A
METALWORKS Linear - Classics Planks Interior Only	**8121**_ _ _ _	2" Microperforated (with plain border and acoustical fleece)	96 × 2 × 5/8"	Class A	N/A	•	•	•	•	•	•	•	N/A
	5492_ _ _ _	4" Microperforated (with plain border and acoustical fleece)	96 × 4 × 5/8"	Class A	N/A	•	•	•	•	•	•	•	0.70 0.85* •
	7161_ _ _ _	6" Microperforated (with plain border and acoustical fleece)	96 × 6 × 5/8"	Class A	N/A	•	•	•	•	•	•	•	0.70 0.85* •
	5493_ _ _ _	8" Microperforated (with plain border and acoustical fleece)	96 × 8 × 5/8"	Class A	N/A	•	•	•	•	•	•	•	0.70 0.85* •
	8123_ _ _ _	10" Microperforated (with plain border and acoustical fleece)	96 × 10 × 5/8"	Class A	N/A	•	•	•	•	•	•	•	0.70 0.85* •
	5571_ _ _ _	12" Microperforated (with plain border and acoustical fleece)	96 × 12 × 5/8"	Class A	N/A	•	•	•	•	•	•	•	0.70 0.85* •

FAST 4 WEEKS or Less

FAST134 program items ready to ship from manufacturer in 4 weeks or less.
Up-to-date lead times and product options (sizes and colors) at armstrongceilings.com/fast134

◆ When specifying or ordering, include the appropriate 3- or 4-letter color suffix (e.g., 5492 W H 2, 5570 F X C H).
When specifying or ordering exterior finishes, place a "2" after the item color suffix (e.g., 5491 F X C H 2).
NOTE: Exterior finishes are only available on M1 planks.
* NRC 0.85 with optional item 8200T10 fiberglass infill panel
** Sequels™ Finishes are for interior use only

METALWORKS™ Linear – Classics

Interior & Exterior
smooth texture

SUSTAIN™
High Performance
Sustainable Ceiling Systems


Declare.

RECYCLED CONTENT
UP TO 35%


LEED V5


COMMON MATERIALS FRAMEWORK		Climate Health	EPD
Human Health	Declare Label	Ecosystem Health	EPD
	HPD		
	3rd Party CDPH	Circular Economy	✓
OCCUPANT EXPERIENCE		Acoustics	✓


INSTALLATION DETAILS

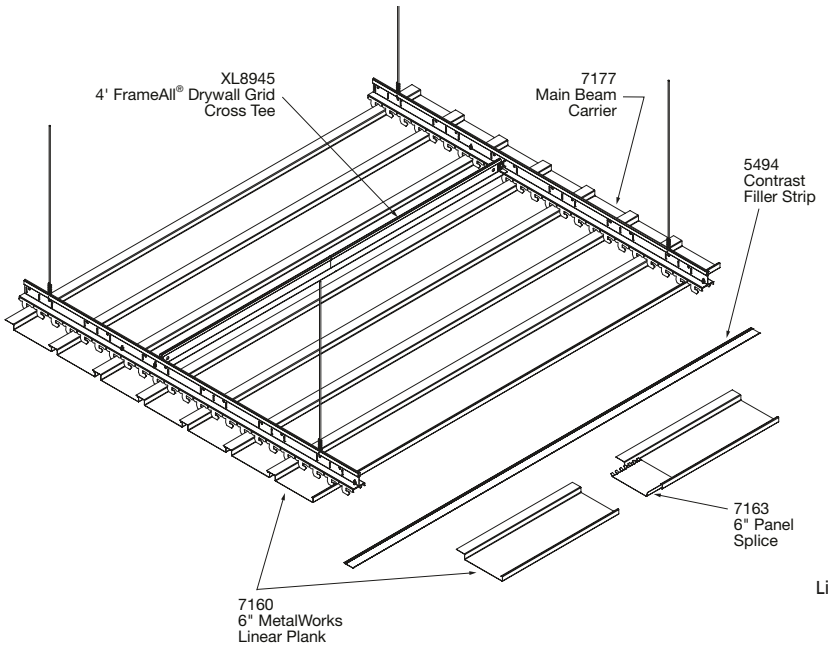


Linear Light Integration

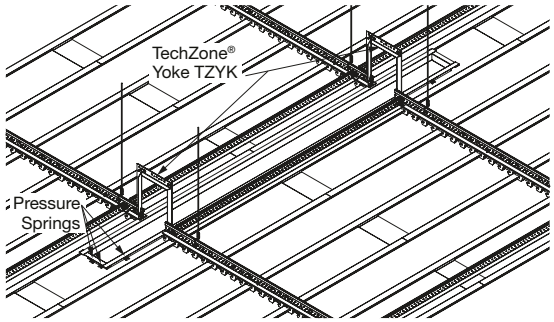

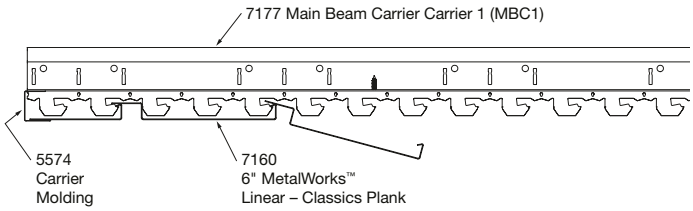

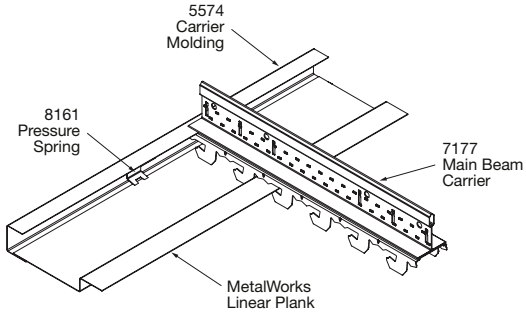

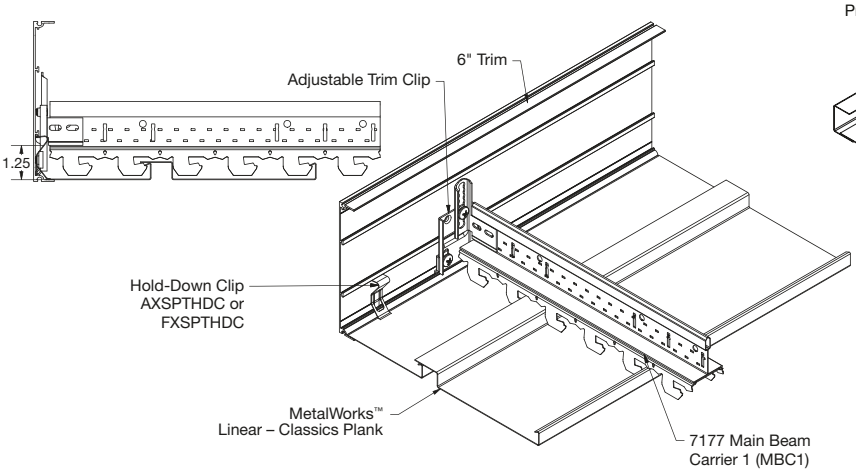

METALWORKS™ – Standard

TechLine 877 276-7876
armstrongceilings.com/metalworkslinear

Armstrong®
World Industries

METALWORKS™ Linear – Classics

Interior & Exterior
smooth texture

SUSTAIN™
High Performance
Sustainable Ceiling Systems
Declare.

RECYCLED CONTENT
UP TO 35%

LEED V5

COMMON MATERIALS FRAMEWORK			
Human Health	Declare Label	Climate Health	EPD
	HPD	Ecosystem Health	EPD
	3rd Party CDPH	Circular Economy	✓
OCCUPANT EXPERIENCE		Acoustics	✓

SUSPENSION SYSTEM & ACCESSORIES

	Item No.◆	Description	Dimensions (Inches) Nominal W x L x H	Color	Pieces/Carton
Suspension Systems Interior & Exterior	**7177**	FrameAll® Main Beam Carrier Assembly – G90 Mill Finish	144 × 1-3/4 × 2-3/4"	N/A	10
	XL8945P	4' FrameAll Drywall Cross Tee – Interior Only	48 × 1-1/2 × 1-1/2"	N/A	36
	XL8945G90	4' FrameAll Drywall Cross Tee	48 × 1-1/2 × 1-1/2"	N/A	36
	XL7936G90	3' FrameAll Drywall Cross Tee – Exterior	36 × 1-1/2 × 1-1/2"	N/A	36
	XL8926G90	2' FrameAll Drywall Cross Tee – Exterior	24 × 1-1/2 × 1-1/2"	N/A	36
Wall-to-Wall Installations	**8161**	Pressure Spring	3/4 × 3/4 × 1-1/8"	N/A	50
	BERC2	Beam End Retaining Clip	N/A	N/A	200
	5574_ _ _ _ _	Carrier Molding Molding – Exterior Available	120 × 1 × 1"	WH, SG, MY, BL and all Effects Wood Looks	10
	7800_ _ _ _ _	Hemmed Angle Molding	144 × 7/8 × 7/8"	WH, BL	30
	HD7801G90 _ _	10' Hemmed Angle Molding – Exterior	120 × 7/8 × 7/8"	N/A	30
Floating Cloud Installations	**AX6VESTR_ _**	Axiom® Vector® Trim – 6" Straight	3/4 × 120 × 6"	WH, SG, MY, BL*	N/A
	AX6VECUR	Axiom Vector® Trim – 6" Curved	3/4 × 120 × 6"	WH, SG, MY, BL*	N/A
	AX6STR _ _ _	Axiom Classic Trim – 6" Straight	3/4 × 120 × 6"	WH, SG, MY, BL*	N/A
	AX6CUR _ _ _	Axiom Classic Trim – 6" Curved	3/4 × 120 × 6"	WH, SG, MY, BL*	N/A
	7239	Adjustable Trim Clip	N/A	N/A	60
	5344_ _ _ _	4" Effects™ Wood Looks Trim	Nominal 120" length	All Effects Wood Looks	6
	5346_ _ _ _	6" Effects Wood Looks Trim	Nominal 120" length	All Effects Wood Looks	6
	FXSPTHDC	Hold-Down Clip for Cut Panel Installations	N/A	N/A	10
Other Accessories	**7237**	Cut Plank Support Bracket	2-1/2 × 2-1/2 × 1-1/4"	N/A	50
	5494	Contrast Filler Strip	96 × 1-1/4 × 1/16"	Black	50

* Items with the same finish name will coordinate but may not be an exact color match.
◆ When specifying or ordering, include the appropriate 4- or 5-letter color suffix (e.g., 5583 F X C H, 5583 F X C H 2).
NOTE: Due to the non-standard suspension system of this product, call TechLine at 1 877 276 7876 to place an order.

METALWORKS™ Linear – Classics

Interior & Exterior
smooth texture

SUSTAIN™
High Performance
Sustainable Ceiling Systems

Declare.

RECYCLED CONTENT
UP TO 35%

LEED V5

COMMON MATERIALS FRAMEWORK		Climate Health	EPD
Human Health	Declare Label	Ecosystem Health	EPD
	HPD		
	3rd Party CDPH	Circular Economy	✓
OCCUPANT EXPERIENCE		Acoustics	✓

ACCESSORIES

	Item No.◆	Description	Pieces/ Carton	Finish Selection
Splice Plates	**8159**	2" Panel Splice	50	N/A
	5495	4" Panel Splice	50	N/A
	7163	6" Panel Splice	50	N/A
	5496	8" Panel Splice	50	N/A
End Caps	**8138_ _ _ _ _**	2" End Cap	50	WH2, SG2, MY2, BL2 and all Effects Wood Looks
	5581_ _ _ _ _	4" End Cap	50	WH2, SG2, MY2, BL2 and all Effects Wood Looks
	7162_ _ _ _ _	6" End Cap	50	WH2, SG2, MY2, BL2 and all Effects Wood Looks
	5582_ _ _ _ _	8" End Cap	50	WH2, SG2, MY2, BL2 and all Effects Wood Looks
	8139_ _ _ _ _	10" End Cap	50	WH2, SG2, MY2, BL2 and all Effects Wood Looks
	5583_ _ _ _ _	12" End Cap	50	WH2, SG2, MY2, BL2 and all Effects Wood Looks

◆ When specifying or ordering, include the appropriate 4- or 5-letter color suffix (e.g., 5583 F X C H, 5583 F X C H 2).

PHYSICAL DATA

Material
Electrogalvanized Steel – thickness 0.028"

Surface Finish
White, Silver Grey, Gun Metal Grey: Powder Coated Effects™: Powder Coated, dye sublimation post-production Sequels™: Pre-coated coil.
Natural Reflections finishes and other colors are available as custom. Contact ASQuote@armstrongceilings.

Edge Detail
Square with extended flange. To create contrast visual, flange is covered with 1-1/4" Black Contrast Filler Strip Item 5494.

Fire Performance
Class A: ASTM E84 and CAN/ULC S102.
Flame Spread Index 25 or less. Smoke Developed Index 50 or less.

ASTM E1264 Classification
Fire Class – Class A
Unperforated – Type XX, Pattern G
Perforated – Type XX, Pattern C

Design Considerations
While we strive to ensure exact color matches, various factors such as differences in materials and painting processes can affect how colors appear on ceiling and wall panels, suspension systems, and trim products. Due to these and other differences, items with the same finish name will coordinate but may not be an exact color match.

VOC Emissions
Third-party certified compliant with California Department of Public Health CDPH/EHLB/Standard Method Version 1.2, 2017. This standard is the guideline for low emissions in LEED®, WELL Building Standard™, Living Building Challenge® (LBC), CalGreen Title 24, ANSI/ASHRAE/USGBC/IES Standard 189; ANSI/GBI Green Building Assessment Protocol.

Installation Consideration
Panels with certain product finishes, e.g., Effects™ and Natural Reflections, are not MetalWorks™ FASTPeel™ panels and will be protected by other means for packaging and handling purposes.

Seismic Restraint
MetalWorks Linear panels have been engineered, tested, and approved for application in all seismic areas when installed per Armstrong Ceilings installation instructions.

Wind Uplift Performance
All panels tested for wind uplift Classes 30, 60, and 90. Specific installation recommendations to meet these wind classes are available. There is no acoustical fleece on exterior panels. For more information, contact TechLine at 877 276 7876.

FAST134 Program Considerations
Size of Job Matters: Big jobs, over 2500 SF or 50 pieces for shapes/vertical elements will have longer lead times.

Location Matters: Transit time not included. We are ready to ship in 1 week on FAST1 items. However, transit to the states west of Wyoming may add time.

Distributor Truck Schedule Matters: We rely on distribution to help move products around the country. When speed matters, work with your local distributor to ensure FAST134 service.

Stock vs Made-to-Order Matters: FAST3 & FAST4 items are made-to-order and will ship direct to distributor. FAST1 (stocked items) will go through distribution and depend on distributor truck schedules.

Cleaning and Disinfecting
Cleaning and CDC approved disinfecting options available on armstrongceilings.com/cleaning

Warranty
Details at armstrongceilings.com/warranty

Weight; Square Feet/Carton
8120 – 1.61 LBS/SF; 24 PCS/CTN or 192 LF/CTN; 32.00 SF/CTN
5490 – 1.61 LBS/SF; 16 PCS/CTN or 128 LF/CTN; 42.66 SF/CTN
7160 – 1.61 LBS/SF; 12 PCS/CTN or 96 LF/CTN; 48.00 SF/CTN
5491 – 1.61 LBS/SF; 10 PCS/CTN or 80 LF/CTN; 53.33 SF/CTN
8122 – 1.61 LBS/SF; 8 PCS/CTN or 64 LF/CTN; 53.33 SF/CTN
5570 – 1.61 LBS/SF; 6 PCS/CTN or 48 LF/CTN; 48.00 SF/CTN
8121 – 1.61 LBS/SF; 24 PCS/CTN or 192 LF/CTN; 32 SF/CTN
5492 – 1.61 LBS/SF; 16 PCS/CTN or 128 LF/CTN; 42.66 SF/CTN
7161 – 1.61 LBS/SF; 12 PCS/CTN or 96 LF/CTN; 48.00 SF/CTN
5493 – 1.61 LBS/SF; 10 PCS/CTN or 80 LF/CTN; 53.33 SF/CTN
8123 – 1.61 LBS/SF; 8 PCS/CTN or 64 LF/CTN; 53.33 SF/CTN
5571 – 1.61 LBS/SF; 6 PCS/CTN or 48 LF/CTN; 48.00 SF/CTN

TechLine / 877 276-7876
armstrongceilings.com/metalworkslinear

BPCS-5113-726

LEED® is a registered trademark of the U.S. Green Building Council; Declare® and Living Building Challenge® (LBC) are registered trademarks of the International Living Future Institute®; WELL™ and WELL Building Standard™ are trademarks of the International WELL Building Institute; Revit® is a registered trademark of Autodesk, Inc.; all other trademarks used herein are the property of AWI Licensing LLC and/or its affiliates © 2026 AWI Licensing LLC

Armstrong® World Industries