# METALWORKS™ Linear – Diverge®


smooth texture

SUSTAIN™
High Performance
Sustainable
Ceiling Systems




MetalWorks Linear – Diverge planks pattern MWLD 08 in Effects Poppy Seed and Gun Metal Grey

CAD/Revit® drawings at:
armstrongceilings.com/cadrevit

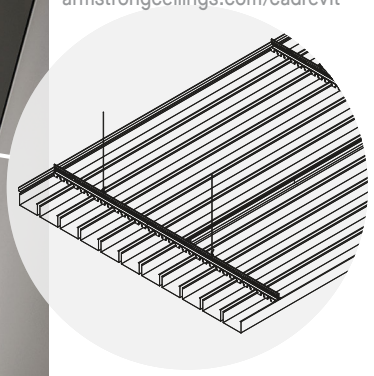

plus capabilities to do more



armstrongceilings.com/capabilities
See more photos at:
armstrongceilings.com/photogallery

**Dimensional metal planks deliver an upscale, open reveal visual with countless configuration possibilities.**

## KEY SELECTION ATTRIBUTES

- New Main Beam Carrier 2 (item 7277BL) for use with two unique systems: Linear – Synchro™ and Linear – Diverge®
- Nominal 2", 4", 6", 9", 11", and 13" wide planks with 1", 2", 3", or 4" depths, available in four standard metal finishes and 17 Effects™ finishes
- new MetalWorks™ Linear – Diverge® panels are part of the Sustain™ portfolio, and meet the most stringent industry sustainability compliance standards today
- Discontinuous ceilings possible with Axiom® trim or coordinating Effects trim using the Adjustable Trim Clip
- Mix and match various plank widths and depths in the same installation to add drama with dimension to interiors
- CleanAssure™ family of products – includes disinfectable planks, suspension systems, and trim
- Planks and suspension system tested and approved for seismic areas per ASTM E580, AC 156 Acceptance Criteria for Seismic Qualification Testing of Non-structural Components, and ASTM 3118
- Integrated downlighting solutions from USAI® sit perfectly flush with the plank face for a sleek visual and can be supported by linear suspension system
- new Field-cut linear lighting options from Axis and BASO tested for fit and finish provide a flush, sleek visual
- Achieve high sound absorption for increased acoustical performance with microperforated planks – 0.70 NRC
- Integrate with pre-engineered Axiom Indirect Field Light Coves for Specialty Ceilings to achieve predictable lighting performance



*Seamlessly integrate linear light fixtures!*

TechLine 877 276-7876
armstrongceilings.com/metalworkslinear

Armstrong®
World Industries

# METALWORKS™ Linear – Diverge®

smooth texture

SUSTAIN™
High Performance
Sustainable Ceiling Systems

Declare.

RECYCLED CONTENT
UP TO 35%

LEED V5

| COMMON MATERIALS FRAMEWORK | | Climate Health | EPD |
|---|---|---|---|
| Human Health | Declare Label | Ecosystem Health | EPD |
| | HPD | | |
| | 3rd Party CDPH | Circular Economy | ✓ |
| OCCUPANT EXPERIENCE | | Acoustics | ✓ |



MetalWorks™ Linear – Diverge® 4" × 1" and 6" × 1" planks in White

## STANDARD COLORS & FINISHES

Due to printing limitations, shade may vary from actual product.

### MetalWorks™ (Interior only)




White (WH) | Silver Grey (SG) | Gun Metal Grey (MY) | Black (BL)

### Effects™ Classic Dye-Sublimation



Effects Cherry (FXCH) | Effects Dark Cherry (FXDC) | Effects Oak (FXOK)

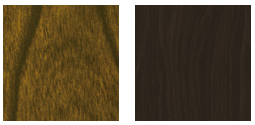

Effects Walnut (FXWN) | Effects Walnut Espresso (FXWE)

### new Effects™ Bold Dye-Sublimation



Effects Sea Salt (FXSS) | Effects Ginger (FXGR) | Effects Nutmeg (FXNM)



Effects Poppy Seed (FXPS) | Effects Peppercorn (FXPC) | Effects Almond (FXAL)

### new Effects™ Subtle Dye-Sublimation



Effects Sesame (FXSE) | Effects Macadamia (FXMA) | Effects Cinnamon (FXCM)



Effects Flax (FXFL) | Effects Cocoa Bean (FXCB) | Effects Coriander (FXCO)

## CUSTOM COLORS & FINISHES

Due to printing limitations, shade may vary from actual product.



Custom Colors Available




Custom Wood-look Finishes Available

Standard colors are pre-qualified for Sustain portfolio requirements. Custom or made-to-order colors must be evaluated separately when Sustain compliance is required.

For custom options contact ASQuote, ASQuote@armstrongceilings.com

## PERFORMANCE OPTIONS

(1:2 scale shown)

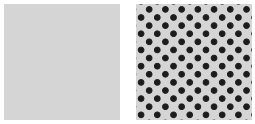

M1 (Unperforated) | M2 (Microperforated)

METALWORKS™ – Standard

TechLine 877 276-7876
armstrongceilings.com/metalworkslinear

Armstrong® World Industries

# METALWORKS™ Linear – Diverge®
smooth texture

SUSTAIN™ High Performance Sustainable Ceiling Systems

Declare.

RECYCLED CONTENT
UP TO 35%

LEED V5

| COMMON MATERIALS FRAMEWORK | | | |
|---|---|---|---|
| Human Health | Declare Label | Climate Health | EPD |
| | HPD | Ecosystem Health | EPD |
| | 3rd Party CDPH | Circular Economy | ✓ |
| OCCUPANT EXPERIENCE | | Acoustics | ✓ |

## VISUAL SELECTION

## PERFORMANCE
Dots represent high level of performance.

| | Item No.◆ | Description | Dimensions Nominal W × L × D (Inches) Custom Sizes Available | Module Width* (Inches) | Fire Performance | (M1 White only) Light Reflect | CleanAssure™ Disinfectable Planks: Fog | Spray | Wipe | DURABILITY: Wash | Scrub | Impact | Scratch | (M2 Perf only) Acoustics |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| METALWORKS™ Linear – Diverge® Planks | 8222A21 _ _ _ _ _ _ | 2" wide, 1" depth plank | 2 × 96 × 1" | 2.25" | Class A | 0.83 | • | • | • | • | • | • | • | 0.70 |
| | 8222A22 _ _ _ _ _ _ | 2" wide, 2" depth plank | 2 × 96 × 2" | 2.25" | Class A | 0.83 | • | • | • | • | • | • | • | 0.70 |
| | 8222A23 _ _ _ _ _ _ | 2" wide, 3" depth plank | 2 × 96 × 3" | 2.25" | Class A | 0.83 | • | • | • | • | • | • | • | 0.70 |
| | 8222A24 _ _ _ _ _ _ | 2" wide, 4" depth plank | 2 × 96 × 4" | 2.25" | Class A | 0.83 | • | • | • | • | • | • | • | 0.70 |
| | 8222A41 _ _ _ _ _ _ | 4" wide, 1" depth plank | 4 × 96 × 1" | 4.50" | Class A | 0.83 | • | • | • | • | • | • | • | 0.70 |
| | 8222A42 _ _ _ _ _ _ | 4" wide, 2" depth plank | 4 × 96 × 2" | 4.50" | Class A | 0.83 | • | • | • | • | • | • | • | 0.70 |
| | 8222A43 _ _ _ _ _ _ | 4" wide, 3" depth plank | 4 × 96 × 3" | 4.50" | Class A | 0.83 | • | • | • | • | • | • | • | 0.70 |
| | 8222A44 _ _ _ _ _ _ | 4" wide, 4" depth plank | 4 × 96 × 4" | 4.50" | Class A | 0.83 | • | • | • | • | • | • | • | 0.70 |
| | 8222A61 _ _ _ _ _ _ | 6" wide, 1" depth plank | 6 × 96 × 1" | 6.75" | Class A | 0.83 | • | • | • | • | • | • | • | 0.70 |
| | 8222A62 _ _ _ _ _ _ | 6" wide, 2" depth plank | 6 × 96 × 2" | 6.75" | Class A | 0.83 | • | • | • | • | • | • | • | 0.70 |
| | 8222A63 _ _ _ _ _ _ | 6" wide, 3" depth plank | 6 × 96 × 3" | 6.75" | Class A | 0.83 | • | • | • | • | • | • | • | 0.70 |
| | 8222A64 _ _ _ _ _ _ | 6" wide, 4" depth plank | 6 × 96 × 4" | 6.75" | Class A | 0.83 | • | • | • | • | • | • | • | 0.70 |
| | 8222A91 _ _ _ _ _ _ | 9" wide, 1" depth plank | 9 × 96 × 1" | 9.00" | Class A | 0.83 | • | • | • | • | • | • | • | 0.70 |
| | 8222A92 _ _ _ _ _ _ | 9" wide, 2" depth plank | 9 × 96 × 2" | 9.00" | Class A | 0.83 | • | • | • | • | • | • | • | 0.70 |
| | 8222A93 _ _ _ _ _ _ | 9" wide, 3" depth plank | 9 × 96 × 3" | 9.00" | Class A | 0.83 | • | • | • | • | • | • | • | 0.70 |
| | 8222AB1 _ _ _ _ _ _ | 11" wide, 1" depth plank | 11 × 96 × 1" | 11.25" | Class A | 0.83 | • | • | • | • | • | • | • | 0.70 |
| | 8222AB2 _ _ _ _ _ _ | 11" wide, 2" depth plank | 11 × 96 × 2" | 11.25" | Class A | 0.83 | • | • | • | • | • | • | • | 0.70 |
| | 8222AD1 _ _ _ _ _ _ | 13" wide, 1" depth plank | 13 × 96 × 1" | 13.50" | Class A | 0.83 | • | • | • | • | • | • | • | 0.70 |
| | 8222AD2 _ _ _ _ _ _ | 13" wide, 2" depth plank | 13 × 96 × 2" | 13.50" | Class A | 0.83 | • | • | • | • | • | • | • | 0.70 |

◆ When specifying or ordering, include the appropriate 2-letter perforation suffix and 2- or 4-letter color suffix (e.g. 8222A21M2 S G, 8222A21M1 F X C H).
* Module width for each plank size will remain the same, regardless of plank depth or perforation.

# METALWORKS™ Linear – Diverge®
smooth texture

SUSTAIN™ High Performance Sustainable Ceiling Systems

Declare.

RECYCLED CONTENT
UP TO 35%

LEED V5

| | | | |
|---|---|---|---|
| COMMON MATERIALS FRAMEWORK | | Climate Health | EPD |
| Human Health | Declare Label | Ecosystem Health | EPD |
| | HPD | | |
| | 3rd Party CDPH | Circular Economy | ✓ |
| OCCUPANT EXPERIENCE | | Acoustics | ✓ |

## SUSPENSION SYSTEM & ACCESSORIES

| | Item No.◆ | Description | Dimensions (Inches) Nominal W × L × D | Color | Pieces/Carton |
|---|---|---|---|---|---|
| Suspension Systems | **7277BL** | Main Beam Carrier 2 (MBC2) – Black | 144 × 1-3/4 × 2-3/4" | BL | 10 |
| | **XL8945PG90BL** | FrameAll® 4' G90 Cross Tee | 48 × 1-1/2 × 1-1/2" | BL | 36 |
| | **XL8926G90BL** | FrameAll 2' G90 Cross Tee | 24 × 1-1/2 × 1-1/2" | BL | 36 |
| Wall-to-Wall Installations | **BERC2BL** | Beam End Retaining Clip | N/A | BL | 50 |
| | **7800 _ _ _ _** | Hemmed Angle Molding | 144 × 7/8 × 7/8" | WH, BL | 30 |
| | **GCWABL** | GCWA Clip | N/A | BL | 200 |
| Floating Cloud Installations | **AX6VESTR_ _** | Axiom® Vector Trim – 6" Straight | 3/4 × 120 × 6" | WH, SG, MY, BL* | N/A |
| | **AX6VECUR_ _** | Axiom® Vector Trim – 6" Curved | 3/4 × 120 × 6" | WH, SG, MY, BL* | N/A |
| | **AX6STR _ _ _** | Axiom Classic Trim – 6" Straight | 3/4 × 120 × 6" | WH, SG, MY, BL* | N/A |
| | **AX6CUR _ _ _** | Axiom Classic Trim – 6" Curved | 3/4 × 120 × 6" | WH, SG, MY, BL* | N/A |
| | **7239** | Adjustable Trim Clip | N/A | N/A | 60 |
| | **5344 _ _ _ _** | 4" Effects™ Wood Looks Trim | Nominal 120" length | All Effects Wood Looks | 6 |
| | **5346_ _ _ _** | 6" Effects Wood Looks Trim | Nominal 120" length | All Effects Wood Looks | 6 |
| Other Accessories | **5494S2BL** | Contrast Filler Strip – Black | 96 × 1/4 × 1/16" | N/A | 200 |
| | **XTACAGBL** | Cross Tee Adapter Clip | N/A | BL | 50 |

◆ Add the 2-digit color suffix to the item number when specifying or ordering (e.g. AX6STR S G), add an extra digit "3" before the color suffix if paint is required inside and outside of trim (e.g. AX6STR 3 S G).
* Items with the same finish name will coordinate but may not be an exact color match.
NOTE: Please contact ASQuote or ASOrder@armstrongceilings.com for this system.





USAI® is a registered trademark of USAI, LLC; LEED® is a registered trademark of the U.S. Green Building Council; Revit® is a registered trademark of Autodesk, Inc.; all other trademarks used herein are the property of AWI Licensing LLC and/or its affiliates © 2026 AWI Licensing LLC

Armstrong® World Industries

# METALWORKS™ Linear – Diverge®
smooth texture

SUSTAIN™ High Performance Sustainable Ceiling Systems

Declare.

RECYCLED CONTENT
UP TO 35%

LEED V5

| | | | |
|---|---|---|---|
| COMMON MATERIALS FRAMEWORK | | Climate Health | EPD |
| Human Health | Declare Label | Ecosystem Health | EPD |
| | HPD | | |
| | 3rd Party CDPH | Circular Economy | ✓ |
| OCCUPANT EXPERIENCE | | Acoustics | ✓ |

## ACCESSORIES

| | Item No.◆ | Description | Finish Selection | Pieces/ Carton |
|---|---|---|---|---|
| Splice Plates | **8242A21** | 2" × 1" Splice Plate | N/A | 10 |
| | **8242A22** | 2" × 2" Splice Plate | N/A | 10 |
| | **8242A23** | 2" × 3" Splice Plate | N/A | 10 |
| | **8242A24** | 2" × 4" Splice Plate | N/A | 10 |
| | **8242A41** | 4" × 1" Splice Plate | N/A | 10 |
| | **8242A42** | 4" × 2" Splice Plate | N/A | 10 |
| | **8242A43** | 4" × 3" Splice Plate | N/A | 10 |
| | **8242A44** | 4" × 4" Splice Plate | N/A | 10 |
| | **8242A61** | 6" × 1" Splice Plate | N/A | 10 |
| | **8242A62** | 6" × 2" Splice Plate | N/A | 10 |
| | **8242A63** | 6" × 3" Splice Plate | N/A | 10 |
| | **8242A64** | 6" × 4" Splice Plate | N/A | 10 |
| | **8242A91** | 9" × 1" Splice Plate | N/A | 10 |
| | **8242A92** | 9" × 2" Splice Plate | N/A | 10 |
| | **8242A93** | 9" × 3" Splice Plate | N/A | 10 |
| End Caps | **8232A21M1_ _ _ _** | 2" × 1" End Cap | WH, SG, MY, BL, and all Effects™ Wood Looks | 10 |
| | **8232A22M1_ _ _ _** | 2" × 2" End Cap | WH, SG, MY, BL, and all Effects Wood Looks | 10 |
| | **8232A23M1_ _ _ _** | 2" × 3" End Cap | WH, SG, MY, BL, and all Effects Wood Looks | 10 |
| | **8232A24M1_ _ _ _** | 2" × 4" End Cap | WH, SG, MY, BL, and all Effects Wood Looks | 10 |
| | **8232A41M1_ _ _ _** | 4" × 1" End Cap | WH, SG, MY, BL, and all Effects Wood Looks | 10 |
| | **8232A42M1_ _ _ _** | 4" × 2" End Cap | WH, SG, MY, BL, and all Effects Wood Looks | 10 |
| | **8232A43M1_ _ _ _** | 4" × 3" End Cap | WH, SG, MY, BL, and all Effects Wood Looks | 10 |
| | **8232A44M1_ _ _ _** | 4" × 4" End Cap | WH, SG, MY, BL, and all Effects Wood Looks | 10 |
| | **8232A61M1_ _ _ _** | 6" × 1" End Cap | WH, SG, MY, BL, and all Effects Wood Looks | 10 |
| | **8232A62M1_ _ _ _** | 6" × 2" End Cap | WH, SG, MY, BL, and all Effects Wood Looks | 10 |
| | **8232A63M1_ _ _ _** | 6" × 3" End Cap | WH, SG, MY, BL, and all Effects Wood Looks | 10 |
| | **8232A64M1_ _ _ _** | 6" × 4" End Cap | WH, SG, MY, BL, and all Effects Wood Looks | 10 |
| | **8232A91M1_ _ _ _** | 9" × 1" End Cap | WH, SG, MY, BL, and all Effects Wood Looks | 10 |
| | **8232A92M1_ _ _ _** | 9" × 2" End Cap | WH, SG, MY, BL, and all Effects Wood Looks | 10 |
| | **8232A93M1_ _ _ _** | 9" × 3" End Cap | WH, SG, MY, BL, and all Effects Wood Looks | 10 |
| | **8232AB1M1_ _ _ _** | 11" × 1" End Cap | WH, SG, MY, BL, and all Effects Wood Looks | 10 |
| | **8232AB2M1_ _ _ _** | 11" × 2" End Cap | WH, SG, MY, BL, and all Effects Wood Looks | 10 |
| | **8232AD1M1_ _ _ _** | 13" × 1" End Cap | WH, SG, MY, BL, and all Effects Wood Looks | 10 |
| | **8232AD2M1_ _ _ _** | 13" × 2" End Cap | WH, SG, MY, BL, and all Effects Wood Looks | 10 |

◆ When specifying or ordering, include the appropriate 2- or 4-letter color suffix (e.g., 8232AD1M1 S G, 8232AD1M2 F X C H).

# METALWORKS™ Linear – Diverge®
smooth texture

SUSTAIN™
High Performance
Sustainable Ceiling Systems


Declare.

RECYCLED CONTENT
UP TO 35%


LEED V5

| | | | |
|---|---|---|---|
| COMMON MATERIALS FRAMEWORK | | Climate Health | EPD |
| Human Health | Declare Label | Ecosystem Health | EPD |
| | HPD | | |
| | 3rd Party CDPH | Circular Economy | ✓ |
| OCCUPANT EXPERIENCE | | Acoustics | ✓ |


## INSTALLATION DETAILS – CEILINGS

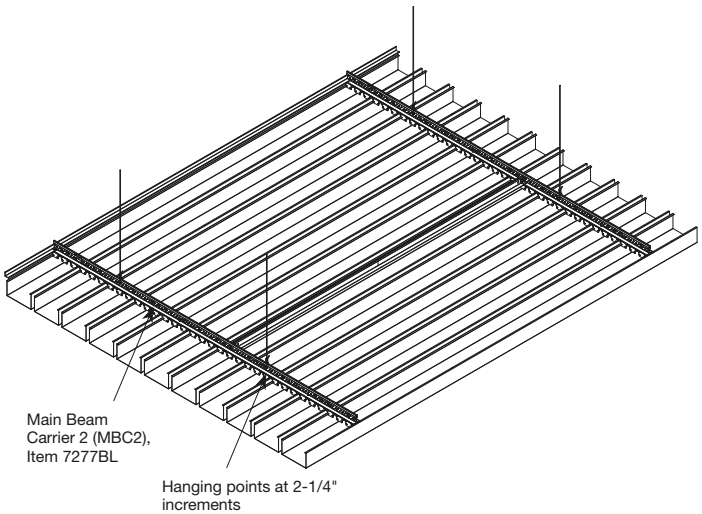



MBC2 Carrier for Diverge®
installed 48" O.C.



Varying Diverge plank widths on MBC2 in a pattern
of 2", 6", and 11"

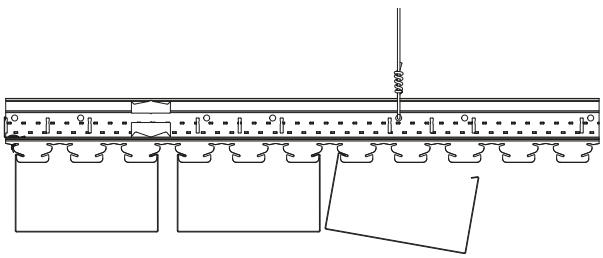

Diverge Planks snap into
lower hooks of MBC2 carrier

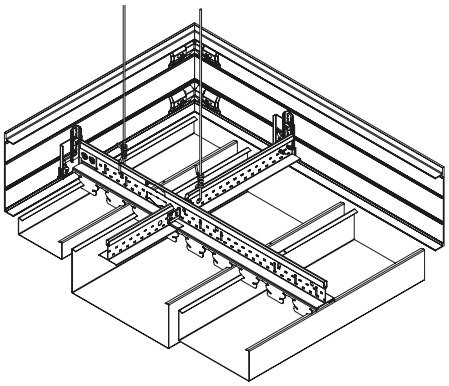

MetalWorks Linear - Diverge
Discontinuous Ceiling with Axiom® Vector (Inverted) – 6"

## PHYSICAL DATA

**Material**
Electrogalvanized Steel – thickness 0.028"

**Surface Finish**
Available in White, Silver Grey, Gun Metal Grey, Tech Black, and Effects™ Wood Looks powder-coated, post-production finishes. Natural Reflections finishes and other colors are available as custom. Contact ASQuote@armstrongceilings.com for custom requests.

**Plank Reveal**
There is a 3/4" reveal between MetalWorks Linear – Diverge planks providing an open reveal dynamic visual.

**Fire Performance**
Class A: ASTM E84 and CAN/ULC S102.
Flame Spread Index 25 or less. Smoke Developed Index 50 or less.

**Design Considerations**
While we strive to ensure exact color matches, various factors such as differences in materials and painting processes can affect how colors appear on ceiling and wall panels, suspension systems, and trim products. Due to these and other differences, items with the same finish name will coordinate but may not be an exact color match.

**VOC Emissions**
Third-party certified compliant with California Department of Public Health CDPH/EHLB/Standard Method Version 1.2, 2017. This standard is the guideline for low emissions in LEED®, WELL Building Standard™, Living Building Challenge® (LBC), CalGreen Title 24, ANSI/ASHRAE/USGBC/IES Standard 189; ANSI/GBI Green Building Assessment Protocol.

**ASTM E1264 Classification**
Fire Class – Class A
Unperforated – Type XX, Form 2, Pattern G
Perforated – Type XX, Form 2, Pattern C

**Seismic Restraint**
MetalWorks Linear – Diverge planks have been engineered, tested, and approved for application in all seismic areas when installed per Armstrong Ceilings installation instructions. When installed properly, both panels and suspension have been tested to stay in place through vibrations and other seismic events.

**Cleaning and Disinfecting**
Cleaning and CDC approved disinfecting options available on armstrongceilings.com/cleaning

**Warranty**
Details at armstrongceilings.com/warranty

**Weight; Plank Width SF/Ctn; Module Width SF/Ctn**
8222A21 – 3.3 lbs/Pc; 16 pcs/ctn; 16 SF/ctn; 24 SF/ctn
8222A22 – 4.7 lbs/Pc; 8 pcs/ctn; 8 SF/ctn; 12 SF/ctn
8222A23 – 6.1 lbs/Pc; 8 pcs/ctn; 8 SF/ctn; 12 SF/ctn
8222A41 – 4.8 lbs/Pc; 8 pcs/ctn; 20 SF/ctn; 24 SF/ctn
8222A42 – 6.3 lbs/Pc; 8 pcs/ctn; 20 SF/ctn; 24 SF/ctn
8222A43 – 7.8 lbs/Pc; 6 pcs/ctn; 15 SF/ctn; 18 SF/ctn
8222A44 – 9.3 lbs/Pc; 6 pcs/ctn; 15 SF/ctn; 18 SF/ctn
8222A61 – 6.5 lbs/Pc; 8 pcs/ctn; 32 SF/ctn; 36 SF/ctn
8222A62 – 8.1 lbs/Pc; 6 pcs/ctn; 24 SF/ctn; 27 SF/ctn
8222A63 – 9.4 lbs/Pc; 4 pcs/ctn; 16 SF/ctn; 18 SF/ctn
8222A64 – 10.4 lbs/Pc; 4 pcs/ctn; 16 SF/ctn; 18 SF/ctn
8222A91 – 8 lbs/Pc; 6 pcs/ctn; 33 SF/ctn; 36 SF/ctn
8222A92 – 9.2 lbs/Pc; 6 pcs/ctn; 33 SF/ctn; 36 SF/ctn
8222A93 – 10.3 lbs/Pc; 4 pcs/ctn; 22 SF/ctn; 24 SF/ctn
8222AB1 – 9.3 lbs/Pc; 4 pcs/ctn; 28 SF/ctn; 30 SF/ctn
8222AB2 – 11.1 lbs/Pc; 4 pcs/ctn; 28 SF/ctn; 30 SF/ctn
8222AD1 – 10.8 lbs/Pc; 4 pcs/ctn; 34 SF/ctn; 36 SF/ctn
8222AD2 – 12.6 lbs/Pc; 4 pcs/ctn; 34 SF/ctn; 36 SF/ctn
8222A24 – 7.72 lbs./Pc; 6 pcs./ctn; 6 SF/ctn; 9 SF/ctn

TechLine 877 276-7876
armstrongceilings.com/metalworkslinear

USAI® is a registered trademark of USAI, LLC; LEED® is a registered trademark of the U.S. Green Building Council; Revit® is a registered trademark of Autodesk, Inc.; all other trademarks used herein are the property of AWI Licensing LLC and/or its affiliates
© 2026 AWI Licensing LLC

Armstrong® World Industries

# METALWORKS™ Linear – Diverge®

Linear Lighting






MetalWorks Linear – Diverge with linear light fixture

**Seamlessly integrate linear light fixtures from Axis and BASO™ with MetalWorks™ Linear – Diverge® planks. Two light fixture installation methods to support project needs - either remove a plank and replace with light fixture or field cut planks to fit fixture housing within.**

## KEY SELECTION ATTRIBUTES

- Install lights seamlessly for MetalWorks Linear – Diverge ceiling planks
- Low-profile, pre-engineered light fixtures from Axis and BASO coordinate with Diverge plank widths and depths
- Approved for use in all seismic categories

## DESIGN CONSIDERATIONS

- Two light fixture installation methods:
  - Light completely replaces Diverge plank
  - Cut Diverge plank face and house linear light fixture within
- Lights must be independently supported
- When replacing Diverge plank with light fixture, there will be a slight reveal on both sides of the light (see charts below)
- If using cut plank installation method for light fixture, it is recommended to center the light within the face of the panel, regardless of the panel size
- Coordination between ceiling contractor and electrician is required for installation

## METALWORKS LINEAR – DIVERGE LIGHTING INSTALLATION METHODS

Two different installation methods to integrate linear lighting into MetalWorks Linear – Diverge ceiling systems to tailor to project and design needs:

Option 1: Replacing a Linear – Diverge plank with a linear light
Option 2: Cutting Linear – Diverge plank face and housing light fixture within plank

For both options, consult the Installation Details charts to identify the number of hooks to cut based on the coordinating light fixtures.

**COMPATIBLE LIGHTS** The following charts represent the compatible lights with the two installation methods

| | Plank Width | Plank Depth | BEAM-2 | BEAM-2 Square | BEAM-4 | Stencil® | Sculpt™ | ZEN Square |
|---|---|---|---|---|---|---|---|---|
| Axis Option #1 | 2" | 1" | N/A | N/A | N/A | · | N/A | N/A |
| | | 2" | N/A | · | N/A | · | · | N/A |
| | | 3" | · | · | N/A | · | · | N/A |
| | | 4" | · | · | N/A | · | · | N/A |
| | 4" | 1" | N/A | N/A | N/A | · | N/A | N/A |
| | | 2" | N/A | · | N/A | · | · | N/A |
| | | 3" | · | · | · | · | · | · |
| | | 4" | · | · | · | · | · | · |
| | 6" | 1" | N/A | N/A | N/A | · | N/A | N/A |
| | | 2" | N/A | · | N/A | · | · | N/A |
| | | 3" | · | · | · | · | · | · |
| | | 4" | · | · | · | · | · | · |
| | 9" | 1" | N/A | N/A | N/A | · | N/A | N/A |
| | | 2" | N/A | · | N/A | · | · | N/A |
| | | 3" | · | · | · | · | · | · |
| | 11" | 1" | N/A | N/A | N/A | · | N/A | N/A |
| | | 2" | N/A | · | N/A | · | · | N/A |
| | 13" | 1" | N/A | N/A | N/A | · | N/A | N/A |
| | | 2" | N/A | · | N/A | · | · | N/A |
| Axis Option #2 | 2" | 1" | N/A | N/A | N/A | N/A | N/A | N/A |
| | | 2" | N/A | N/A | N/A | N/A | N/A | N/A |
| | | 3" | N/A | N/A | N/A | N/A | N/A | N/A |
| | | 4" | N/A | N/A | N/A | N/A | N/A | N/A |
| | 4" | 1" | N/A | N/A | N/A | N/A | N/A | N/A |
| | | 2" | N/A | N/A | N/A | N/A | N/A | N/A |
| | | 3" | N/A | N/A | N/A | N/A | N/A | N/A |
| | | 4" | N/A | N/A | N/A | N/A | N/A | N/A |
| | 6" | 1" | N/A | N/A | N/A | · | N/A | N/A |
| | | 2" | N/A | · | N/A | · | · | N/A |
| | | 3" | · | · | N/A | · | · | N/A |
| | | 4" | · | · | N/A | · | · | N/A |
| | 9" | 1" | N/A | N/A | N/A | · | N/A | N/A |
| | | 2" | N/A | · | N/A | · | · | N/A |
| | | 3" | · | · | · | · | · | · |
| | 11" | 1" | N/A | N/A | N/A | · | N/A | N/A |
| | | 2" | N/A | · | N/A | · | · | N/A |
| | 13" | 1" | N/A | N/A | N/A | · | N/A | N/A |
| | | 2" | N/A | · | N/A | · | · | N/A |

**COMPATIBLE LIGHTS (continued)** The following charts represent the compatible lights with the two installation methods

| | Plank Width | Plank Depth | BASO 1.5 | BASO 2.5 | BASO 4.0 | PANO™-2 | PANO-3.25 | PANO-5.25 |
|---|---|---|---|---|---|---|---|---|
| BASO™ Option #1 | 2" | 1" | N/A | N/A | N/A | · | N/A | N/A |
| | | 2" | N/A | N/A | N/A | · | N/A | N/A |
| | | 3" | · | · | N/A | · | N/A | N/A |
| | | 4" | · | · | N/A | · | N/A | N/A |
| | 4" | 1" | N/A | N/A | N/A | · | · | · |
| | | 2" | N/A | N/A | N/A | · | · | · |
| | | 3" | · | · | · | · | · | · |
| | | 4" | · | · | · | · | · | · |
| | 6" | 1" | N/A | N/A | N/A | · | · | · |
| | | 2" | N/A | N/A | N/A | · | · | · |
| | | 3" | · | · | · | · | · | · |
| | | 4" | · | · | · | · | · | · |
| | 9" | 1" | N/A | N/A | N/A | · | · | · |
| | | 2" | N/A | N/A | N/A | · | · | · |
| | | 3" | · | · | · | · | · | · |
| | 11" | 1" | N/A | N/A | N/A | · | · | · |
| | | 2" | · | · | · | · | · | · |
| | 13" | 1" | N/A | N/A | N/A | · | · | · |
| | | 2" | · | · | · | · | · | · |
| BASO Option #2 | 2" | All | N/A | N/A | N/A | N/A | N/A | N/A |
| | 4" | All | N/A | N/A | N/A | N/A | N/A | N/A |
| | 6" | 1" | N/A | N/A | N/A | · | N/A | N/A |
| | | 2" | N/A | N/A | N/A | · | N/A | N/A |
| | | 3" | · | · | N/A | · | N/A | N/A |
| | | 4" | · | · | N/A | · | N/A | N/A |
| | 9" | 1" | N/A | N/A | N/A | · | N/A | N/A |
| | | 2" | N/A | · | N/A | · | · | N/A |
| | | 3" | · | · | · | · | · | · |
| | 11" | 1" | N/A | N/A | N/A | · | · | · |
| | | 2" | · | · | · | · | · | · |
| | 13" | 1" | N/A | N/A | N/A | · | · | · |
| | | 2" | · | · | · | · | · | · |

# METALWORKS™ Linear – Diverge®

Linear Lighting


## INSTALLATION DETAILS – OPTION 1

| Axis | BEAM-2 | BEAM-2 Square | BEAM-4 |
|---|---|---|---|
| Hooks Removed | 1 | 1 | 2 |
| Equal Reveal on either side of light | 0.276" | 0.276" | 0.535" |

| | Stencil® | Sculpt™ | ZEN Square |
|---|---|---|---|
| Hooks Removed | 1 | 1 | 2 |
| Equal Reveal on either side of light | 0.432" | 0.776" | 0.691" |

| BASO™ | BASO 1.5 | BASO 2.5 | BASO 4.0 |
|---|---|---|---|
| Hooks Removed | 1 | 1 | 2 |
| Equal Reveal on either side of light | 0.682" | 0.339" | 0.973" |

| | PANO™-2 | PANO-3.25 | PANO-5.25 |
|---|---|---|---|
| Hooks Removed | 1 | 2 | 2 |
| Equal Reveal on either side of light | 0.526" | 1.035" | 0.035" |

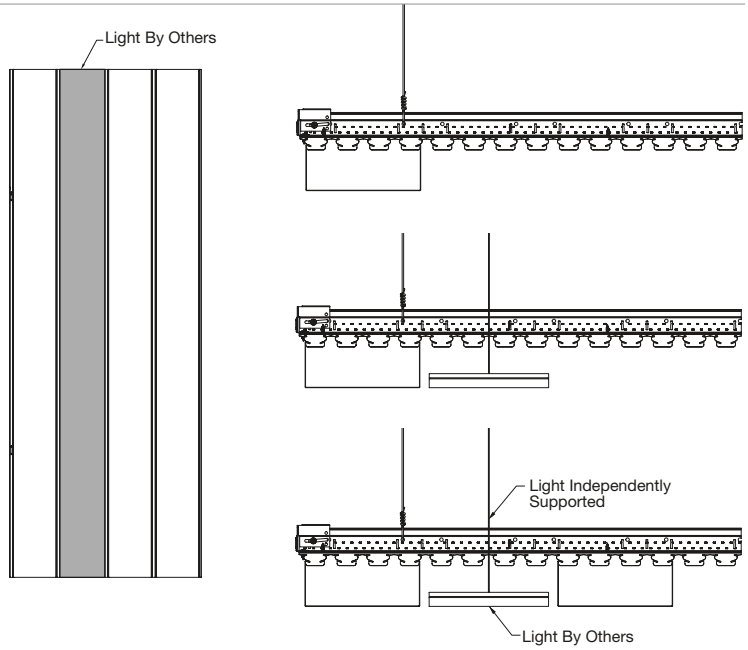



## INSTALLATION DETAILS – OPTION 2

| Axis | BEAM-2 | BEAM-2 Square | BEAM-4 |
|---|---|---|---|
| Hooks Removed | 1 | 1 | 2 |

| | Stencil | Sculpt | ZEN Square |
|---|---|---|---|
| | 1 | 1 | 2 |

| BASO | BASO 1.5 | BASO 2.5 | BASO 4.0 |
|---|---|---|---|
| Hooks Removed | 1 | 1 | 2 |

| | PANO-2 | PANO-3.25 | PANO-5.25 |
|---|---|---|---|
| | 1 | 2 | 2 |

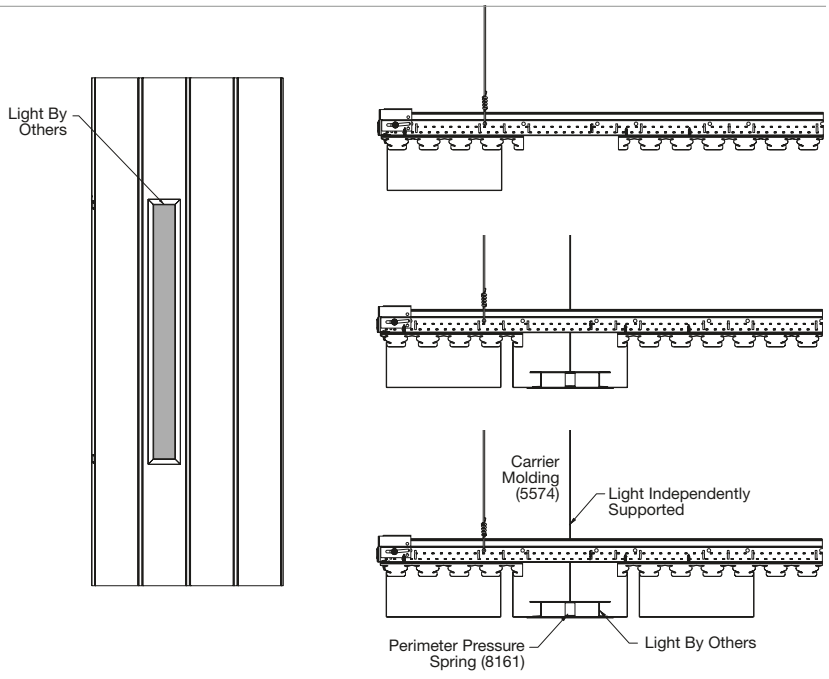


## LIGHTING FIXTURES

Compatible with Axis Beam, Stencil, Sculpt, & ZEN Square fixtures, and BASO light fixtures.

BASO axis

For detailed lighting information, contact your local BASO or Axis representative.



TechLine / 877 276-7876
armstrongceilings.com/metalworkslinear

BPCS-6389-726

LEED® is a registered trademark of the U.S. Green Building Council; Declare® and Living Building Challenge® (LBC) are registered trademark of the International Living Future Institute®; WELL™ and WELL Building Standard™ are trademarks of the International WELL Building Institute; Stencil® and Sculpt™ are trademarks of Axis Lighting, Inc.; all other trademarks used herein are the property of AWI Licensing LLC and/or its affiliates © 2026 AWI Licensing LLC

Armstrong® World Industries