METALWORKS™

Tegular
smooth texture


TOTAL ACOUSTICS™
Sound Absorption (NRC)
+ Sound Blocking (CAC)

FAST 4 WEEKS or Less
FAST134
Select Items Ship Fast
armstrongceilings.com/fast134



CAD/Revit® drawings at:
armstrongceilings.com/cadrevit

plus capabilities to do more




armstrongceilings.com/capabilities
See more photos at:
armstrongceilings.com/photogallery

MetalWorks™ Tegular microperforated panels in Silver Grey with Prelude® XL® 15/16" suspension system

Washable, scrubbable, impact- and soil- resistant on the practical side... smooth and sleek design on the other.

KEY SELECTION ATTRIBUTES

- Now available in 17 Effects™ wood-look finishes
- Get total noise control and design flexibility with Total Acoustics™ ceiling panels: NRC + CAC = Total Acoustics
- Panels can be used to create continuous looks or clouds using Axiom® or Effects™ Wood Looks trim
- Select products included in the FAST134 program – ready to ship in 4 weeks or less
- CleanAssure™ family of products – includes disinfectable panels, suspension systems, and trim
- Standard perforations available to enhance acoustical performance and design aesthetics
- Outstanding NRC with acoustical fleece or infill panel (0.65 – 0.90)
- BioAcoustic™ infill panels can enhance acoustics and contribute to LEED® credits
- new This product can be adjusted to comply with Build America, Buy America (BABA) requirements. Modifications to pricing and lead times may apply. Contact your local sales representative for additional information.

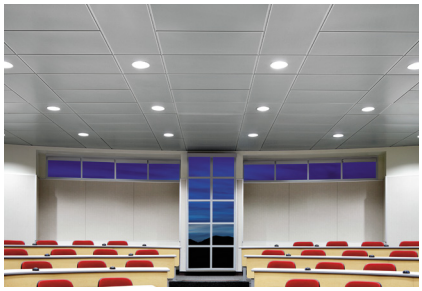

Available in 4 weeks or less order-to-ship!

TechLine 877 276-7876
armstrongceilings.com/metalworks

Armstrong® World Industries

METALWORKS™

Tegular
smooth texture

RECYCLED CONTENT
UP TO **35%**

LEED V5

COMMON MATERIALS FRAMEWORK		Climate Health	EPD
Human Health	Declare Label	Ecosystem Health	EPD
	HPD		
	3rd Party CDPH	Circular Economy	✓
OCCUPANT EXPERIENCE		Acoustics	✓



MetalWorks Tegular Microperforated panels in Silver Grey

STANDARD COLORS & FINISHES

Due to printing limitations, shade may vary from actual product.

MetalWorks™

White (WH)



Silver Grey (SG)



Gun Metal Grey (MY)

Effects™ Classic
Dye-sublimation



Effects Cherry (FXCH)



Effects Dark Cherry (FXDC)



Effects Oak (FXOK)



Effects Walnut (FXWN)



Effects Walnut Espresso (FXWE)

Effects™ Bold
Dye-sublimation



Effects Sea Salt (FXSS)



Effects Ginger (FXGR)



Effects Nutmeg (FXNM)



Effects Poppy Seed (FXPS)



Effects Peppercorn (FXPC)



Effects Almond (FXAL)

Effects™ Subtle
Dye-sublimation



Effects Sesame (FXSE)



Effects Macadamia (FXMA)



Effects Cinnamon (FXCM)



Effects Flax (FXFL)



Effects Cocoa Bean (FXCB)



Effects Coriander (FXCO)

CUSTOM COLORS & FINISHES

Due to printing limitations, shade may vary from actual product.



Custom Colors Available




Custom Wood-look Finishes Available

For custom options and premium requests contact ASQuote, ASQuote@armstrongceilings.com


STANDARD PERFORATION OPTIONS

(1:2 scale shown)


M1 (Unperforated)



M2 (Microperforated)




M3 (Extra Microperforated)




Custom Perforations Available

DETAILS







1. MetalWorks™ Tegular Microperforated
2. MetalWorks Tegular Extra Microperforated
3. Effects Wood Looks Tegular Extra Microperforated

TechLine 877 276-7876
armstrongceilings.com/metalworks

Armstrong® World Industries

METALWORKS™

Tegular
smooth texture

RECYCLED CONTENT
UP TO 35%

LEED V5

COMMON MATERIALS FRAMEWORK			
Human Health	Declare Label	Climate Health	EPD
	HPD	Ecosystem Health	EPD
	3rd Party CDPH	Circular Economy	✓
OCCUPANT EXPERIENCE		Acoustics	✓

VISUAL SELECTION

	Item No.◆	Dimensions Nominal W × L (Inches) Custom Sizes Available	Perforations
METALWORKS™ Flush Tegular (with acoustical fleece) 15/16" Grid	6461_ _ _ _	24" × 24" ☐	M1, M2
METALWORKS 5/16" Square Tegular (with acoustical fleece) 15/16" Grid	6462_ _ _ _	24" × 24" ☐	M1, M2
9/16" Grid	6464_ _ _ _ _ _◆◆	24" × 24" ☐	M1, M2, M3

PERFORMANCE

Dots represent high level of performance.

	Fire Performance	Light Reflect (M1 White only)	CleanAssure™ Disinfectable Panels: Fog	Spray	Wipe	DURABILITY: Wash	Scrub	Impact
6461_ _ _ _	Class A	0.77	•	•	•	•	•	•
6462_ _ _ _	Class A	0.77	•	•	•	•	•	•
6464_ _ _ _ _ _◆◆	Class A	0.77	•	•	•	•	•	•

FAST 4 WEEKS or Less

FAST134 program items ready to ship from manufacturer in 4 weeks or less.
Up-to-date lead times and product options (sizes and colors) at armstrongceilings.com/fast134

◆ When specifying or ordering, include the appropriate perforation, letter color, and, if needed, coating suffix with the item number (e.g., 6464 M 1 F X M P).
◆◆ Available in Effects™ Wood Looks Finishes.
NOTE: Perforation M2 not available in Effects finishes as a standard option.

ACOUSTICAL INFORMATION

Performance determined by perforation size.


Perforation	Infill Panel Item No.	NRC	+ CAC	= Total Acoustics[1] NRC + CAC
M1 Unperforated		N/A	36 •	–
M2 Microperforated	No infill	0.70 •	N/A	–
	8200T10	0.90 •	N/A	–
	5479	0.85 •	N/A	–
	5823	0.85 •	N/A	–
	1713	0.75	39 •	GOOD
	2820	0.80 •	35 •	BEST
M3 Extra Microperforated	No infill	0.65	N/A	–
	8200T10	0.70 •	N/A	–
	5479	0.70 •	N/A	–
	5823	0.70 •	N/A	–
	2820	0.60	35 •	–

[1] Total Acoustics™ ceiling panels have an ideal combination of sound absorption and sound blocking in one product.
GOOD (NRC 0.60-0.65; CAC 35+)
BETTER (NRC 0.70-0.75; CAC 35+)
BEST (NRC 0.80+; CAC 35+)

EXAMPLE: **6464 M1 WH**
- 6464: Panel Dimension/Type: 15/16" Square Tegular
- M1: Perforation: M1 Unperforated
- WH: Finish: White

TOTAL ACOUSTICS™ PANEL INSTALLATION



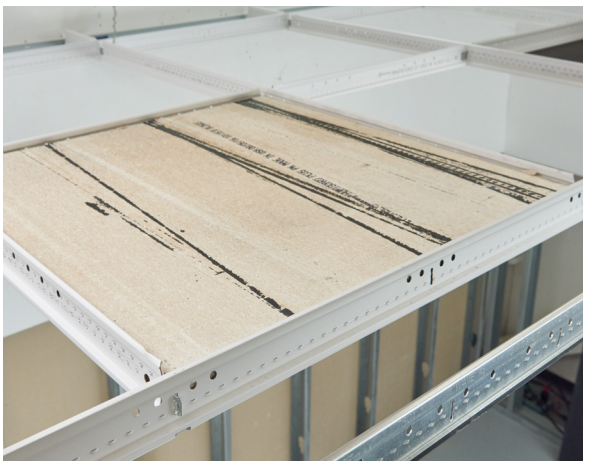

MetalWorks Tegular ceiling panel with Calla® 2820 acoustic infill panel – Total Acoustics™ ceiling system

TechLine 877 276-7876
armstrongceilings.com/metalworks

Armstrong® World Industries

METALWORKS™


Tegular
smooth texture

RECYCLED CONTENT
UP TO 35%

LEED V5

COMMON MATERIALS FRAMEWORK		Climate Health	EPD
Human Health	Declare Label	Ecosystem Health	EPD
	HPD		
	3rd Party CDPH	Circular Economy	✓
OCCUPANT EXPERIENCE		Acoustics	✓

FACETED INSTALLATION

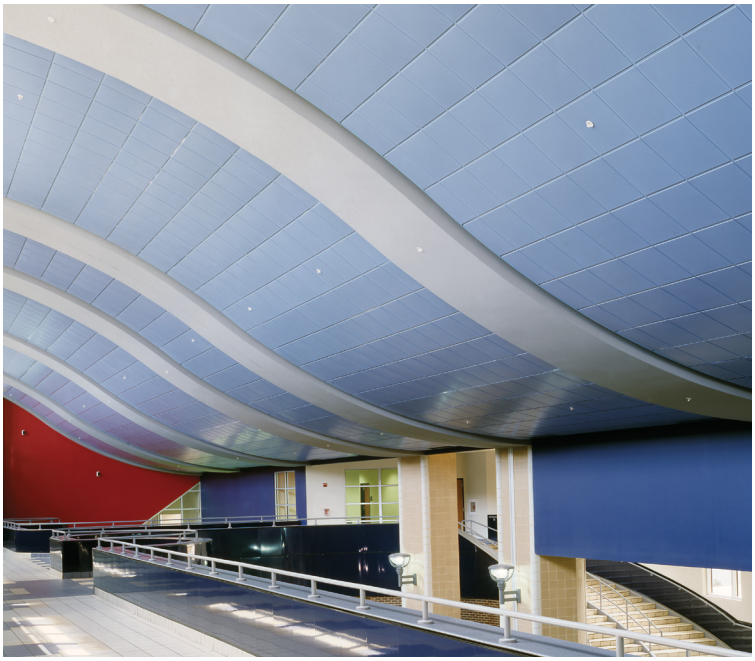


MetalWorks™ Tegular faceted panels




MetalWorks™ Tegular faceted panels

FACETED PERIMETER DETAILS

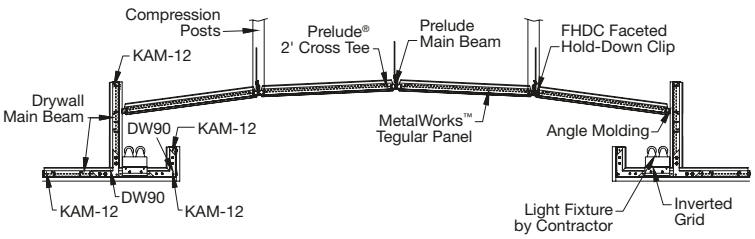

Perimeter conditions require custom treatments. Moldings must be bent to match the ceiling angle where it meets the walls along the straight sides and cut to align with the panel segments on the faceted sides. It is recommended that these installations tie into a wall or drywall bullhead rather than attempt to create a floating ceiling condition.

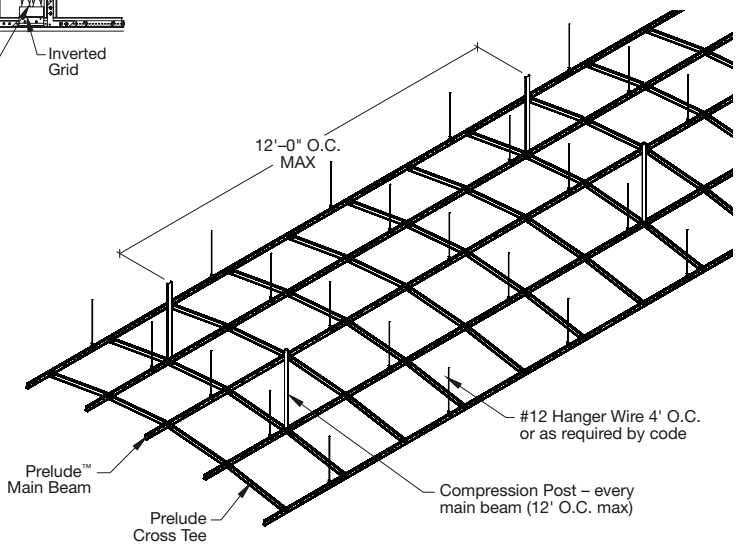

METALWORKS™ – Standard

METALWORKS™

Tegular
smooth texture


RECYCLED CONTENT
UP TO 35%


LEED V5


COMMON MATERIALS FRAMEWORK			
Human Health	Declare Label	Climate Health	EPD
	HPD	Ecosystem Health	EPD
	3rd Party CDPH	Circular Economy	✓
OCCUPANT EXPERIENCE		Acoustics	✓

PERIMETER INSTALLATION DETAILS (Spreader channel inserts into "C" channel.)


5/16" Square Tegular

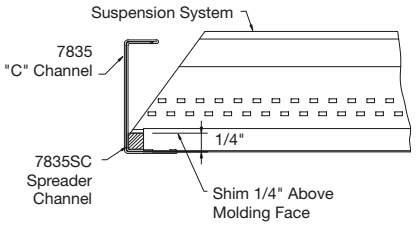


Prelude® XL®




Suprafine® XL®




Silhouette® XL®



Interlude® XL®


5/8" Square Tegular

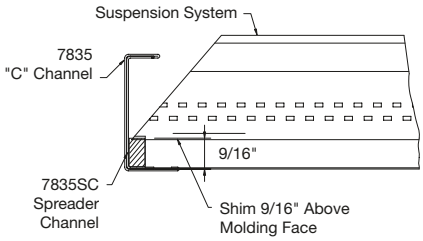


Suprafine

Flush Tegular

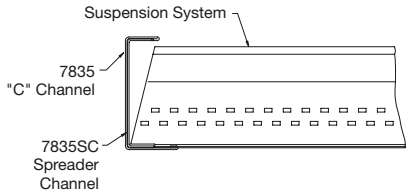


Prelude XL
15/16" Exposed Tee

METALWORKS™ – Standard

METALWORKS™

Tegular
smooth texture

RECYCLED CONTENT
UP TO 35%

LEED V5

COMMON MATERIALS FRAMEWORK			
Human Health	Declare Label HPD 3rd Party CDPH	Climate Health Ecosystem Health	EPD EPD
		Circular Economy	✓
OCCUPANT EXPERIENCE		Acoustics	✓


ACCESSORIES

Item No.◆	Description	Dimensions (Inches)	Pieces/Carton
5342 _ _ _ _	2" Effects™ Wood Looks Trim	120 × 3/4 × 2"	6
5344 _ _ _ _	4" Effects Wood Looks Trim	120 × 4 × 4"	6
5346 _ _ _ _	6" Effects Wood Looks Trim	120 × 6 × 6"	6
6096_ _	Edge Cap for Cut Tegular Panels for 15/16" suspension systems (not available in Effects™ finishes, order in Black (BL))	Nominal 24" length	50
6099_ _	Edge Cap for Cut Tegular Panels for 9/16" suspension systems (not available in Effects finishes, order in Black (BL))	Nominal 24" length	50
FXSPTHDC	Effects™ Hold-Down Clip for Cut Panel Installations	N/A	10
FHDC	Faceted Hold-Down Clip	N/A	10
1713	School Zone® Fine Fissured™ Square Lay-in Acoustic Panel	24 × 24 × 3/4"	14
2820	Calla® Square Lay-in Acoustic Panel	24 × 24 × 1"	10
5479	BioAcoustic™ Infill Panel (Beige – Matte)	24 × 24 × 5/8"	12
5823	BioAcoustic™ Infill Panel (Black – Matte)	24 × 24 × 5/8"	12
8200T10	1" Fiberglass Infill Bag (Black – Gloss)	24 × 24"	12

◆ When specifying or ordering, include the appropriate 2- or 4-letter color suffix (e.g., 6099 B L, 5346 F X C H).

SUSPENSION SYSTEMS

15/16" 9/16"



Prelude® XL® Suprafine® XL® Silhouette® Interlude® XL® HRC

Prelude® and Suprafine® suspension systems are available in coordinating colors. All other suspension systems are available in standard White only. Other colors available as special order.

PHYSICAL DATA

Material
Electrogalvanized Steel – 0.021" thickness

Surface Finish
Factory-applied powder-coated finish (post-coated for color). Factory-applied powder-coated finish (post-coated).

Custom colors also available. Contact TechLine for custom color matching requests at 877 276-7876.

Fire Performance
Class A: ASTM E84 and CAN/ULC S102. Flame Spread Index 25 or less. Smoke Developed Index 50 or less.

Acoustical Performance
CAC testing conducted using Prelude® XL® for 15/16" edge detail and Silhouette® for 9/16" edge detail.

ASTM E1264 Classification
Fire Class – Class A
Unperforated – Type XX, Pattern G
Perforated – Type XX, Pattern C

VOC Emissions
Third-party certified compliant with California Department of Public Health CDPH/EHLB/Standard Method Version 1.2, 2017. This standard is the guideline for low emissions in LEED®, WELL Building Standard™, Living Building Challenge® (LBC), CalGreen Title 24, ANSI/ASHRAE/USGBC/IES Standard 189; ANSI/GBI Green Building Assessment Protocol.

Installation Consideration
For Tegular faceted installations, a Faceted Hold-Down Clip must be used, which will limit accessibility. If accessibility is required in a faceted application, use Vector® panels.

For information about faceted applications with square Tegular panels in 15/16" suspension system, refer to installation instructions on our website at armstrongceilings.com/installation.

Seismic Restraint
MetalWorks Tegular panels have been engineered, tested, and approved for application in all seismic areas when installed per Armstrong Ceilings installation instructions.

Cleaning and Disinfecting
Cleaning and CDC recommended disinfecting options available on armstrongceilings.com/cleaning

FAST134 Program Considerations
Size of Job Matters: Big jobs, over 2500 SF or 50 pieces for shapes/vertical elements will have longer lead times.

Location Matters: Transit time not included. We are ready to ship in 1 week on FAST1 items. However, transit to the states west of Wyoming may add time.

Distributor Truck Schedule Matters: We rely on distribution to help move products around the country. When speed matters, work with your local distributor to ensure FAST134 service.

Stock vs Made-to-Order Matters: FAST3 & FAST4 items are made-to-order and will ship direct to distributor. FAST1 (stocked items) will go through distribution and depend on distributor truck schedules.

Warranty
Details at armstrongceilings.com/warranty

Weight; Square Feet/Carton
6461M2 – 0.75 lbs/SF; 64 SF/Ctn
6461M1 – 0.80 lbs/SF; 64 SF/Ctn
6462M2 – 0.86 lbs/SF; 64 SF/Ctn
6462M1, 6463M2, 6465M2, 6462M3 – 0.89 lbs/SF; 64 SF/Ctn
6464M2, 6463M1, 6465M1, 6464M3 – 0.92 lbs/SF; 64 SF/Ctn
6464M1 – 0.97 lbs/SF; 64 SF/Ctn

TechLine / 877 276-7876
armstrongceilings.com/metalworks

BPCS-5109-726

LEED® is a registered trademark of the U.S. Green Building Council; Living Building Challenge® (LBC) is a registered trademark of the International Living Future Institute®; WELL™ and WELL Building Standard are trademarks of the International WELL Building Institute; all other trademarks used herein are the property of AWI Licensing LLC and/or its affiliates © 2026 AWI Licensing LLC

Armstrong® World Industries