SOUNDSCAPES® Blades

Linear Acoustical Panels – Wood Looks
smooth texture

FAST 4 WEEKS or Less

FAST134
Select Items Ship Fast
armstrongceilings.com/fast134




SoundScapes Blades and SoundScapes® Shapes in Bourbon Cherry (WBC) wood looks with LightArt® LA2 Essentials fixtures

CAD/Revit® drawings at:
armstrongceilings.com/cadrevit



Wall application

ProjectWorks®
Complimentary Design &
Pre-Construction Service



armstrongceilings.com/projectworks

SoundScapes® Blades vertical panels achieve acoustical excellence in your space – with versatile ways to install on ceilings and walls.

KEY SELECTION ATTRIBUTES

- Now available in 7 standard wood-look visuals
- Mix standard designs, lengths, and depths for dynamic visuals
- Sound absorption up to 2.05 NRC dependent on blade depth and spacing
- Select products included in the FAST134 program – ready to ship in 4 weeks or less

- Coordinated Prelude® suspension systems and Lyra® PB wood-look visuals available
- CleanAssure™ family of products – includes disinfectable panels, suspension systems, and trim
- 20 vertical panel sizes and shapes
- Black embedded hanging clips

- Three installation options for maximum ceiling and wall design flexibility
  - From standard suspension system
  - From individual cable suspension
  - Direct-attach method using Axiom® wall molding
- Mold and mildew-resistant surface
- Linear, upscale visual
- Seismic-tested

- Custom panel options available
- Add scrim to top edge as a premium option
- ASTM E84 Class A Fire Performance
- Made in the U.S.A. of domestic and global content
- Build America, Buy America (BABA) Act compliant

FINISHES

Wood-look Visuals



Brown Sugar Walnut (WBS) | Toffee Chestnut (WTC) | Vanilla Ash (WVA) | Honey Oak (WHO)

Bourbon Cherry (WBC) | Earl Grey Teak (WGT) | Dark Mocha Walnut (WMW)

For premium and custom capabilities,
contact ASQuote@armstrongceilings.com



Nature-Inspired Colors Available!

TechLine 877 276-7876
armstrongceilings.com/soundscapesblades

Armstrong® World Industries


SOUNDSCAPES® Blades

Linear Acoustical Panels – Wood Looks
smooth texture


RECYCLED CONTENT
53%

LEED V5


COMMON MATERIALS FRAMEWORK	Climate Health
Human Health	Ecosystem Health
	Circular Economy ✓
OCCUPANT EXPERIENCE	Acoustics ✓

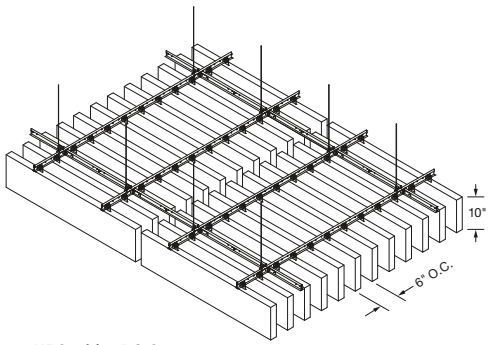

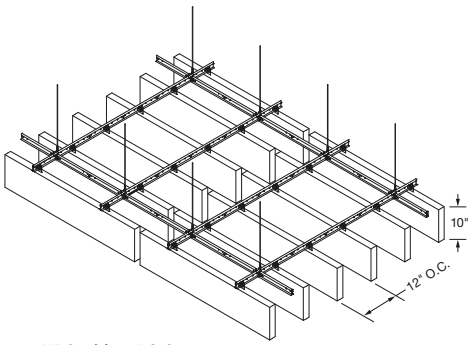
1.15 NRC with 6" O.C.
Blade Spacing



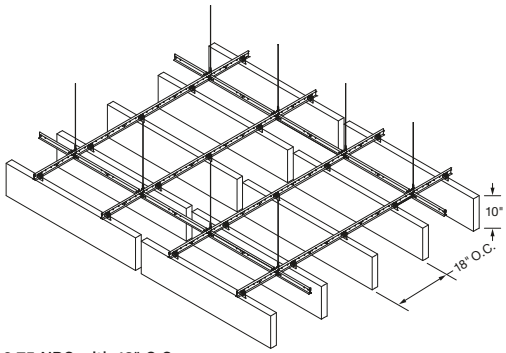0.95 NRC with 12" O.C.
Blade Spacing



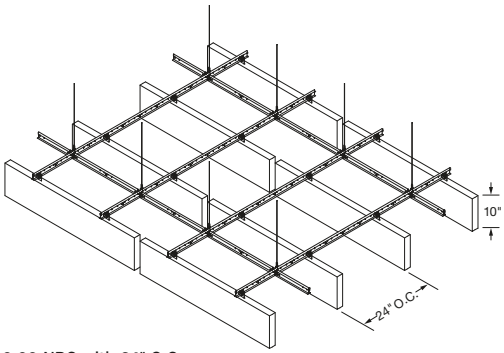0.75 NRC with 18" O.C.
Blade Spacing




0.60 NRC with 24" O.C.
Blade Spacing

ACOUSTIC INFORMATION


Panel Depth	NRC 6" O.C.	NRC 12" O.C.	NRC 18" O.C.	NRC 24" O.C.
5"	0.85	0.60	0.45	0.35
7-1/2"	1.00	0.75	0.60	0.50
10"	1.15	0.95	0.75	0.60
10-1/2"	1.20	1.00	0.80	0.65
16"	1.50	1.25	1.00	0.85
19-1/2"	1.65	1.35	1.15	1.00
22"	1.80	1.45	1.25	1.10
22-1/2"	1.85	1.50	1.30	1.15
28"	2.05	1.70	1.45	1.30


NOTE: Tested per ASTM C423 without infill panels. Spacing of blades, blade depth, and acoustical infill panels will impact acoustical performance. Contact TechLine for a custom reverberation time report at techline@armstrongceilings.com

THREE WAYS TO INSTALL





Direct to Grid Suspension System






Individual Suspension using Hanging Kit







Direct-attach Method using Axiom® Wall Molding



CUSTOM PANEL DESIGN EXAMPLES

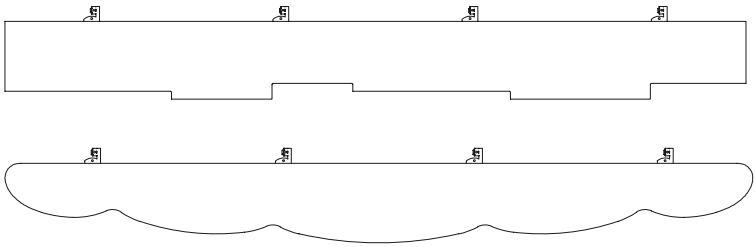

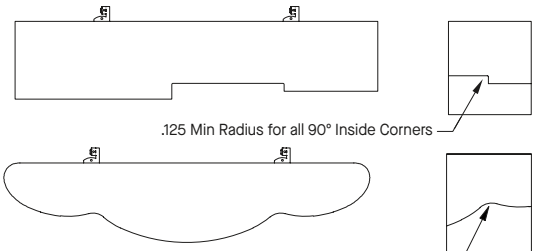

SOUNDSCAPES® Blades

Linear Acoustical Panels – Wood Looks

smooth texture








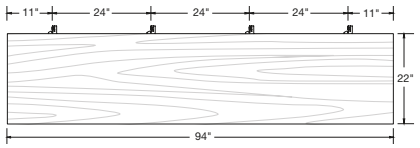
RECYCLED CONTENT 53%

LEED V5

COMMON MATERIALS FRAMEWORK
Climate Health
Human Health
Ecosystem Health
Circular Economy ✓
OCCUPANT EXPERIENCE
Acoustics ✓

VISUAL SELECTION Shown in elevation view

PERFORMANCE Dots represent high level of performance.

Item No.◆	Description	Dimensions (D × L × Thickness)		Fire Rating	Bio-Block® Anti-Mold/ Milderw	Humi-Guard+ Sag Resist	CleanAssure™ Disinfectable Panels Fog	CleanAssure™ Disinfectable Panels Spray
8250F04RH05 _ _ _	Rectangular Vertical Panel	5 × 46 × 1-3/4"		Class A	•	•	•	•
8250F04RH06 _ _ _	Rectangular Vertical Panel	5 × 94 × 1-3/4"		Class A	•	•	•	•
8250F04RH01 _ _ _	Rectangular Vertical Panel	10 × 46 × 1-3/4"		Class A	•	•	•	•
8250F04RH02 _ _ _	Rectangular Vertical Panel	10 × 94 × 1-3/4"		Class A	•	•	•	•
8250F04RH07 _ _ _	Rectangular Vertical Panel	16 × 46 × 1-3/4"		Class A	•	•	•	•
8250F04RH08 _ _ _	Rectangular Vertical Panel	16 × 94 × 1-3/4"		Class A	•	•	•	•
8250F04RH03 _ _ _	Rectangular Vertical Panel	22 × 46 × 1-3/4"		Class A	•	•	•	•
8250F04RH04 _ _ _	Rectangular Vertical Panel	22 × 94 × 1-3/4"		Class A	•	•	•	•

FAST 4 WEEKS or Less

FAST134 program items ready to ship from manufacturer in 4 weeks or less.
Up-to-date lead times and product options (sizes and colors) at armstrongceilings.com/fast134

NOTE: Scrimmed top edges offered as "Premium," contact ASQuote@armstrongceilings.com
◆ Add 3-letter color suffix to end of item number (e.g., 8250F04RH02 W H O = Honey Oak)

SOUNDSCAPES® Blades

Linear Acoustical Panels – Wood Looks

smooth texture










RECYCLED CONTENT 53%

LEED V5

COMMON MATERIALS FRAMEWORK	Climate Health
Human Health	Ecosystem Health
	Circular Economy ✓
OCCUPANT EXPERIENCE	Acoustics ✓

VISUAL SELECTION Shown in elevation view

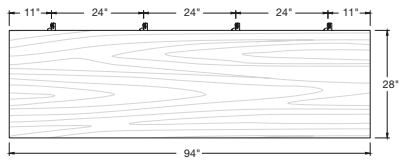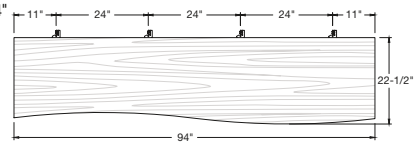PERFORMANCE Dots represent high level of performance.

Item No.◆	Description	Dimensions (D × L × Thickness)		Fire Rating	Bio-Block® Anti-Mold/ Milderw	Humi-Guard+ Sag Resist	CleanAssure™ Disinfectable Panels Fog	CleanAssure™ Disinfectable Panels Spray
8250F04RH09 _ _ _	Rectangular Vertical Panel	28 × 46 × 1-3/4"		Class A	•	•	•	•
8250F04RH10_ _ _	Rectangular Vertical Panel	28 × 94 × 1-3/4"		Class A	•	•	•	•
8250F04CH01_ _ _	Hill Vertical Panel	7-1/2 × 46 × 1-3/4"		Class A	•	•	•	•
8250F04CH02_ _ _	Valley Vertical Panel	10-1/2 × 46 × 1-3/4"		Class A	•	•	•	•
8250F04CH03_ _ _	Hill Vertical Panel	19-1/2 × 46 × 1-3/4"		Class A	•	•	•	•
8250F04CH04_ _ _	Valley Vertical Panel	22-1/2 × 46 × 1-3/4"		Class A	•	•	•	•
8250F04WH01 _ _ _	Wave Vertical Panel	10-1/2 × 94 × 1-3/4"		Class A	•	•	•	•
8250F04WH02 _ _ _	Wave Vertical Panel	22-1/2 × 94 × 1-3/4"		Class A	•	•	•	•
8250F04WH03 _ _ _	Wave Vertical Panel	10 × 46 × 1-3/4"		Class A	•	•	•	•

FAST 4 WEEKS or Less

FAST134 program items ready to ship from manufacturer in 4 weeks or less.
Up-to-date lead times and product options (sizes and colors) at armstrongceilings.com/fast134

NOTE: Scrimmed top edges offered as "Premium," contact ASQuote@armstrongceilings.com
◆ Add 3-letter color suffix to end of item number (e.g., 8250F04RH02 W H O = Honey Oak)

TechLine 877 276-7876
armstrongceilings.com/soundscapesblades

Armstrong® World Industries

SOUNDSCAPES® Blades

Linear Acoustical Panels – Wood Looks

smooth texture

RECYCLED CONTENT 53%



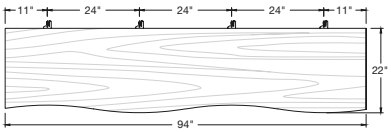
LEED V5

COMMON MATERIALS FRAMEWORK
- Climate Health
- Human Health
- Ecosystem Health
- Circular Economy ✓

OCCUPANT EXPERIENCE
- Acoustics ✓

VISUAL SELECTION Shown in elevation view

PERFORMANCE Dots represent high level of performance.

Item No.◆	Description	Dimensions (D × L × Thickness)		Fire Rating	Bio-Block® Anti-Mold/ Milderw	Humi-Guard+ Sag Resist	CleanAssure™ Disinfectable Panels Fog	CleanAssure™ Disinfectable Panels Spray
8250F04WH04 _ _ _	Wave Vertical Panel	22 × 46 × 1-3/4"		Class A	•	•	•	•
8250F04WH05 _ _ _	Double Wave Vertical Panel	10 × 94 × 1-3/4"		Class A	•	•	•	•
8250F04WH06 _ _ _	Double Wave Vertical Panel	22 × 94 × 1-3/4"		Class A	•	•	•	•

FAST 4 WEEKS or Less

FAST134 program items ready to ship from manufacturer in 4 weeks or less.
Up-to-date lead times and product options (sizes and colors) at armstrongceilings.com/fast134

NOTE: Scrimmed top edges offered as "Premium," contact ASQuote@armstrongceilings.com
◆ Add 3-letter color suffix to end of item number (e.g., 8250F04RH02 W H O = Honey Oak)

STANDARD WOOD-LOOK VISUALS Color-coordinated standard Prelude® Suspension System colors shown below.


Brown Sugar Walnut (WBS)


Prelude Suspension System in Black (BL)


Toffee Chestnut (WTC)


Prelude Suspension System in Oat (SOT)


Vanilla Ash (WVA)


Prelude Suspension System in Hay (SHY)


Honey Oak (WHO)



Prelude Suspension System in Hay (SHY)


Bourbon Cherry (WBC)


Prelude Suspension System in Black (BL)


Earl Grey Teak (WGT)


Prelude Suspension System in Grey Stone (GS)


Dark Mocha Walnut (WMW)


Prelude Suspension System in Black (BL)

BLADES – Standard

SOUNDSCAPES® Blades

Linear Acoustical Panels – Wood Looks

smooth texture

RECYCLED CONTENT
53%

LEED V5

COMMON MATERIALS FRAMEWORK	Climate Health
Human Health	Ecosystem Health
	Circular Economy ✓
OCCUPANT EXPERIENCE	Acoustics ✓

INSTALLATION OPTIONS


	Item No.◆	Description	LF/CTN
Direct to Grid Suspension System	**7301 _ _ _**	12' HD Main Beam	240
	XL7342 _ _ _	4' Cross Tee	240
	XL7328 _ _ _	2' Cross Tee	120
	7800 _ _ _	12' Angle Molding	360
360° Painted Direct to Grid Suspension System	**730136 _ _**	12' HD Main Beam (BL & WH)	240
	XL734036 _ _	4' Cross Tee (BL & WH)	240
	XL732036 _ _	2' Cross Tee (BL & WH)	120
	780036 _ _	12' Angle Molding (BL & WH)	360
Floating Cloud Installations	**AX4STR3 _ _**	10' Axiom® Classic 4" Straight Trim	See note*

360° finish colors are available (in heavy duty variations) for applications to match Axiom or when custom colors are needed. Please refer to the Prelude XL 360° Painted data sheet.

◆ When specifying or ordering items with a color, add the 2- or 3-digit suffix to the end of the item number (e.g. 7301 B L)

* 360° Paint Recommended; order by the piece

Prelude® XL®



	Item No.◆	Description	PCS/CTN	
Direct-Attach with Axiom® Wall Molding	**AXM34STR3 _ _**	10' Straight Wall Molding	See note*	
Individual Suspension Using Hanging Kit	**6655L8CR**	4-Point Hanging Kit	4 per bag	
Accessories	**ARBRKT**	Adjustable Hanger Bracket	80	
	6459BL	Black Rigid Attachment Clip	25	
	STAC	Single Tee Adapter Clip	120	
	625530	Extended Hanging Aircraft Cables (30') For use with Item 6655L8CR when longer cables are needed.	4	

◆ When specifying or ordering items with a color, add the 2- or 3-digit suffix to the end of the item number (e.g. 7301 S H Y). 15/16" Prelude® XL® Suspension System available in coordinating colors. For the appropriate 3-digit color suffix, please visit armstrongceilings.com/suspensionsystems

PHYSICAL DATA

Material
1-3/4" thick fiberglass with acoustically transparent membrane on face and sides.

Surface Finish
Acoustically transparent membrane. Top of panel is unfinished with black embedded hanging clips.

Fire Performance
SoundScapes® Blades panel material is ASTM E84 Class A: Flame Spread 25 or under and Smoke Developed 50 or less.

CAN/ULC S102 surface burning characteristics. Flame Spread Rating 25 or less. Smoke Developed Classification 50 or less.

SoundScapes Blades panels, as with other architectural features located in the ceiling plane, may obstruct or skew the existing or planned fire sprinkler water distribution pattern, or possibly delay the activation of the fire sprinkler or fire detection system. Consult a fire protection engineer, NFPA 13, and local codes for guidance on the proper installation techniques where fire detection or suppression systems are present.

FAST134 Program Considerations
Size of Job Matters: Big jobs, over 2500 SF or 50 pieces for shapes/vertical elements will have longer lead times.

Location Matters: Transit time not included. We are ready to ship in 1 week on FAST1 items. However, transit to the states west of Wyoming may add time.

Distributor Truck Schedule Matters: We rely on distribution to help move products around the country. When speed matters, work with your local distributor to ensure FAST134 service.

Stock vs Made-to-Order Matters: FAST3 & FAST4 items are made-to-order and will ship direct to distributor. FAST1 (stocked items) will go through distribution and depend on distributor truck schedules.

ProjectWorks® Collaborative Design Service
Complimentary design assistance that streamlines projects with detailed layouts, 3D Revit Models, finish schedules, and more.

ProjectWorks Pre-Construction Service
Comprehensive drawing packages and a fully priced bill of materials to support bidding, ordering, and installation.

Visit armstrongceilings.com/projectworks

Anti-Mold/Mildew
Ceiling tiles with BioBlock® performance resist the growth of mold and mildew on the tile surface.

Design Considerations
SoundScapes Blades panels maintain a natural bow that may be noticeable when installed 2" or less apart.

Special care in installation and handling must be taken with wood-look blades to avoid surface damage. Be advised thickness on wood-look blades is 1/4" less than painted blades.

5" SoundScapes Blades can now be used on walls, but are not recommended for use in high-traffic or high-impact areas. For best results, install above 7' from floor level.

SoundScapes Blades panels can be ordered with scrim on top edge as a premium.

All wood-look blades are produced with wood grain parallel to the panel length. Wood-look visuals are designed to mimic slight color variations as seen in real wood.

Seismic Restraint
SoundScapes Blades are approved for all seismic areas when installed per the seismic guidelines in the Armstrong Ceilings installation instructions.

Recommended Suspension Systems
SoundScapes Blades panels are pre-assembled with metal hanging clips in the top of the panels. See Installation Instructions BPLA-297844 for installation details.

Warranty
Details at armstrongceilings.com/warranty

Panel Weight

8250F04RH01 – 5.1 LBS/PC	8250F04CH01 – 4.0 LBS/PC
8250F04RH02 – 10.3 LBS/PC	8250F04CH02 – 5.4 LBS/PC
8250F04RH03 – 10.5 LBS/PC	8250F04CH03 – 9.4 LBS/PC
8250F04RH04 – 20.9 LBS/PC	8250F04CH04 – 10.7 LBS/PC
8250F04RH05 – 2.9 LBS/PC	8250F04WH01 – 10.7 LBS/PC
8250F04RH06 – 5.8 LBS/PC	8250F04WH02 – 21.3 LBS/PC
8250F04RH07 – 7.8 LBS/PC	8250F04WH03 – 5.1 LBS/PC
8250F04RH08 – 15.6 LBS/PC	8250F04WH04 – 10.5 LBS/PC
8250F04RH09 – 13.1 LBS/PC	8250F04WH05 – 10.3 LBS/PC
8250F04RH10 – 26.2 LBS/PC	8250F04WH06 – 20.9 LBS/PC

Panels/Carton
4 panels/carton; 2 panels/carton for items 8250F04RH04, 8250F04RH10, 8250F04WH02, and 8250F04WH06 only

Minimum Order Quantity
1 carton

TechLine / 877 276-7876
armstrongceilings.com/soundscapesblades

BPCS-5094-526

LEED® is a registered trademark of the U.S. Green Building Council; Living Building Challenge® (LBC) is a registered trademark of the International Living Future Institute®; WELL™ and WELL Building Standard™ are trademarks of the International WELL Building Institute; LightArt® is a registered trademark of 3Form, Inc.; Revit® is a registered trademark of Autodesk, Inc. all other trademarks used herein are the property of AWI Licensing LLC and/or its affiliates © 2026 AWI Licensing LLC

Armstrong® World Industries