
# EXPOSED TEE SUSPENSION SYSTEMS
## Accessories




**2" Beam End Retaining Clip** – Joins main beam or cross tee to wall molding and web of suspension system with no visible pop rivets.

**ALBERC2** (aluminum) – 200 pcs
**FZALBERC2** (aluminum) – 50 pcs
**BERC2** (steel) – 200 pcs
**FZBERC2** (steel) – 50 pcs




**BERC – Beam End Retaining Clip** – Joins web of main beam or cross tee to wall molding with no visible pop rivets.

**BERC** – 200 pcs
**FZBERC** – 50 pcs




**Seismic Joint Clip – Main Beam** – Allows the ceiling to be divided at a splice on the main beam to ccommodate the IBC mandate for ceiling areas greater than 2500 SF to have seismic separation joints. ES4 expansion sleeve is used to cover 3/4" gap.

**SJMR15** for 15/16" – 100 pcs
**FZSJMR15** for 15/16" – 50 pcs
**SJMR9** for 9/16" – 100 pcs
**FZSJMR9** for 9/16" – 50 pcs




**Seismic Joint Clip Cross Tee** – Offers a tested seismic solution for separation joints in Seismic Category D, E, and F installations.

**SJCG** (PeakForm®) – 200 pcs
**FZSJCG** (PeakForm) – 50 pcs
**SJCSI** (square bulbs) – 200 pcs
**FZSJCSI** (square bulbs) – 50 pcs




**Expansion Sleeves**

**ES4** – for 15/16" Prelude® – 100 pcs
**FZES4** – 50 pcs
**ES49** – for 9/16" Suprafine® – 100 pcs
**FZES49** – 50 pcs
**ES76004** – for 1/4" Silhouette® – 200 pcs
**FZES76004** – 50 pcs
**ES76008** – for 1/8" Silhouette – 200 pcs
**FZES76008** – 50 pcs



**AXSJ-Axiom® Slip Joint** – Used to join two acoustical ceiling systems on seismic D, E, F installations. Can also be used to join two different ceiling systems. Hanger wire holes every 6", beginning 3" from each end.

**AXSJ** – 120" LFT




**STAC – Single Tee Adapter Clip** – Used to create code compliant non-seismic and seismic C and D, E, F off-module main beam to cross tee connections.

**STAC** – 120 pcs
**FZSTAC** – 50 pcs




**GC3WG90 – Grip Clip 3-Way** – Joins main beams to cross tee via locking barbs without pop rivetsor screws.

**GC3WG90** – 250 pcs
**FZGC3WG90** – 50 pcs




**XTACAG – Cross Tee Adapter Clip** – Used to attach field-cut cross tees to main beams

**XTACAG** – 100 pcs
**FZXTACAG** – 50 pcs



**GCWA – Grip Clip Wall Attachment** – Joins main beam or cross tee to wall molding via locking barbs without pop rivets or screws.

**GCWA** – 250 pcs
**FZGCWA** – 50 pcs




**Closure Clips**

**MCC4G** for Silhouette® 1/4" reveal – 200 pcs
**FZMCC4G** – 50 pcs
**MCC8** for Silhouette 1/8" reveal – 200 pcs
**FZMCC8** – 50 pcs
**IES3** for Interlude® – 200 pcs
**FZIES3** – 50 pcs


**C1430 – Variable Placement Hook Clip** – Attach to T-Bar to create special length tees and position anywhere along the main beams.

**C1430** – 200 pcs
**FZC1430** – 50 pcs




**DLCC – Direct Load Ceiling Clip** – To hang suspension system below existing 15/16" grid face, transferring weight directly to hanger wire; may be used to preserve the fire rating of an existing ceiling and to support heavy accessories.

**DLCC** – 250 pcs
**FZDLCC** – 50 pcs




**UPCAG – Partition Clip** – Fastens partition track section to suspension system for secure attachment; flip for 9/16" or 15/16" suspension system.

**UPCAG** – 200 pcs
**FZUPCAG** – 50 pcs



**UTC – Uptight Clip** – For tight suspension system attachment to 1-1/2" channel; bridging under HVAC ducts; can be used to install the suspension system tight to wood joists.


**UTC** – 250 pcs
**FZUTC** – 50 pcs



**Channel Beam Splice** – Used to suspend main beams to 1-1/2" black iron carrying channels.


**CBS4A** (4") – 200 pcs; **FZCBS4** – 50 pcs
**CBS6A** (6") – 200 pcs; **FZCBS6** – 50 pcs
**CBS8A** (8") – 200 pcs; **FZCBS8** – 50 pcs
**CBS10A** (10") – 150 pcs; **FZCBS10** – 50 pcs
**CBS12A** (12") – 150 pcs; **FZCBS12** – 50 pcs

For 2" Black Iron
**CBS2004A** (4") – 75 pcs; **FZCBS2004A** – 50 pcs
**CBS2006A** (6") – 75 pcs; **FZCBS2006A** – 50 pcs
**CBS2008A** (8") – 75 pcs; **FZCBS2008A** – 50 pcs




**SH12 – PeakForm® Support Hanger** – For suspension systems 12" knock-out at 12" O.C.

**SB12** Square Bulb Support Hanger – 12 pcs/bundle
**SB12G90** Square Bulb Support – 12 pcs/bundle
**SH12** Hanger – 12 pcs/bundle




**Adjustable Grid Spacer Clip** – Used to space two parallel main beams for light fixtures, air diffusers, etc.; allows for 1/4" adjustments with three different clips.



**GSC9** Main Beam Center Line Spacing **FZGSC9** – 50 pcs
2'1/2" - 8'1/2" – 100 pcs


**GSC12** Main Beam Center Line Spacing **FZGSC12** – 50 pcs
5'1/2" - 11'1/2" – 100 pcs

**GSC16** Main Beam Center Line Spacing **FZGSC16** – 50 pcs
9'1/2" - 15'1/2" – 100 pcs




**DWC – Drywall Clip** – Allows for a "second" ceiling to be installed below a drywall ceiling; attach through installed drywall to supporting structure; DWC-approved for use in UL® Designs P237, P239, P240, and P241.

**DWC** – 250 pcs
**FZDWC** – 50 pcs

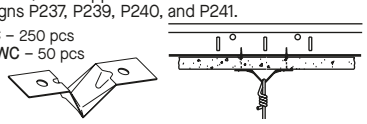


**7876 – Field Rout Tool** – 1 pc
**7876RK – Field Rout Tool Repair Kit** – 1 pin and 1 punch
**ARPLUG – Cross Tee Plug Clip** – 80 pcs




**TZYK/TZBC – TechZone® Yoke & Brace**

**TZYK** TechZone Yoke – 100 pcs
**FZTZYK** TechZone Yoke – 50 pcs
**TZBC** TechZone Brace - 100 pcs




**435A/436A – Optima® Panel Stabilizer Clips**

**435A** Stabilizer Clips for 3/4" - 1" panels – 50 pcs
**436A** Stabilizer Clips for 1-1/2" panels – 50 pcs



**440A/441A/442A/443/522A – Vector® Clips**

**440A** Ultima® Panel Border Clip – 50 pcs
**441A** Optima® Panel Border Clip – 50 pcs
**442A** Hold-Down Clip – 50 pcs
**443** Border Clips for Calla® Vector® – 50 pcs
**522A** Mid-point Clip – 50 pcs



**12 lb. Aircraft Cable and Connectors**

**AC1210** – 10' length
**AC1215** – 15' length
**AC1220** – 20' length
**ACHC** – Cable Quick Loop Connector
1 pc

# EXPOSED TEE SUSPENSION SYSTEMS
## Accessories

LEED® WELL™ LBC

UP TO 30% RECYCLED CONTENT

Calculate sustainability with Ecomedes
armstrongceilings.com/ecomedes


energy management; construction waste mgmt; regional materials; design for flexibility; EPD; recyclable/ extended producer resp.; biobased materials; recycled content; sourcing of raw materials; material ingredient reporting; low emitting/ materials; lighting quality; acoustics

LOCATION DEPENDENT

**7866 – Bullnose Corner Cover** – For nominal 7/8" molding; snap over molding to trim outside corners; fits 1" radius block; 2" legs.


**7864 – Bullnose Corner Cover** – For nominal 7/8" molding; fits 3/4" radius block; 2" legs.

**7866** – 100 pcs
**FZ7866** – 50 pcs
**7864** – 100 pcs
**FZ7864** – 50 pcs




**7867 – Field-Cut Corner Cover** – For nominal 15/16" molding; cut to fit irregular corner conditions; 2" legs.

**7867** – 100 pcs
**FZ7867** – 50 pcs




**7869 – Inside/Outside Corner Cover** – For nominal 7/8" angle molding; 1-3/4" legs.

**7869** – 50 pcs




**7863 – Outside Corner Cover** – For nominal 7/8" angle molding; snap over molding to trim outside corners; 2" legs.

**7863** – 100 pcs
**FZ7863** – 50 pcs




**7865 – Outside Corner Cover** – For nominal 9/16" angle molding; snap over molding to trim outside corners; 2" legs.

**7865** – 100 pcs
**FZ7865** – 50 pcs




**Shadow Molding – Inside Corner** – Snaps over molding to easily trim inside corner:

**7874IC** use with 7874 – 100 pcs; **FZ7874IC** – 50 pcs
**7861** use with 7873 – 100 pcs; **FZ7861** – 50 pcs
**877IC** use with 7877 – 100 pcs; **FZ877IC** – 50 pcs
**7878IC** use with 7878 – 100 pcs; **FZ7878IC** – 50 pcs




**Shadow Molding – Outside Corner** – snaps over molding to easily trim outside corner:

**7874OC** use with 7874 – 100 pcs; **FZ7874OC** – 50 pcs
**7862** use with 7873 – 100 pcs; **FZ7862** – 50 pcs
**7877OC** use with 7877 – 100 pcs; **FZ7877OC** – 50 pcs
**7878OC** use with 7878 – 100 pcs; **FZ7878OC** – 50 pcs




**LFC – Fixture Clip** – Prefinished White for use at corners of light fixture modules on 9/16" exposed tee suspension systems (Suprafine®, Interlude®, Silhouette®); increases corner size to 15/16" which adapts light fixtures designed for the 15/15" suspension system; used when fixtures are not positively attached to the suspension system.

**LFC** – 50 pcs;
**FZLFC** – 50 pcs



**414AG – Retention Clip** – Attaches to main beams and cross tees behind lay-in ceiling; helps prevent accidental panel displacement by basketballs and other forces from below the ceiling.

**414AG** – 100 pcs
**FZ414AG** – 50 pcs





**UHDCA – Universal Hold-Down Clip** – Attaches to top bulb of the suspension system to hold 1/16" to 5/8" lay-in panel in place; helps to prevent ceiling panel fluttering at entryways.

**UHDCA** – 1,000 pcs
**FZUHDCA** – 50 pcs

**CHDC – Clear Hold-Down Clip** – 50 pcs


**BHDC – Border Hold-Down Clip** – Attaches to Angle Molding to hold down perimeter panels
Made of Stainless Steel
**BHDC** – 100 pcs






**PMHDC** – Maximum Hold-Down Clip –

Attaches to the top bulb of the suspension system to hold 5/8" to 1" ceiling panels in place; or in sloped ceiling applications helps to prevent ceiling panel movement.
**PMHDC** - 100 pcs
**FZPMHDC** – 50 pcs




**7425** – 24" Stabilizer Bar – 100 pcs
**7431** – 30" Stabilizer Bar – 100 pcs
**7445** – 48" Stabilizer Bar – 100 pcs

Used to maintain uniform spacing of suspension system components (main beams and cross tees).





**7891 – 12 Gauge Soft Hanger Wire** (12' length) – Used to hang suspended ceilings from structural deck.

**7891** – 140 pcs




**EHDC50A** – Exterior Hold-Down Clip for 1/2" lay-in ceiling panels and drywall;
**EHDC58AG** – Exterior Hold-Down Clip for 5/8" lay-in ceiling panels and drywall;
**EHDC75A** – Exterior Hold-Down Clip for 3/4" lay-in ceiling panels and drywall; locks under bulb of suspension system member to prevent upward movement.

**EHDC50A** – 125 pcs; **FZEHDC50A** – 50 pcs
**EHDC58AG** – 125 pcs; **FZEHDC58AG** – 50 pcs
**EHDC75A** – 125 pcs; **FZEHDC75A** – 50 pcs




**GA7327 – Grid Adapter** – Allows for easy directional changes of Prelude® Main beams; 27" long component has two different end details. One end has a SuperLock™ clip with a rout 3" from the end, opposite end has an XL® clip with override end detail. This enables the adapter to be connected to either end of a Prelude main beam or plugged into a rout location on a main beam or cross tee.

**GA7327** – 60 pcs




**WS12 – Hanger Wire Splice** – Splices 12-gauge hanger wire; recommended for renovation applications; provides easy adjustment of ceiling height.

**WS12** – 1,000 pcs
**FZWS12** – 50 pcs




**BACG90A – Wind Uplift Clip** – 250 pcs
**FZBAGG90A** – 50 pcs



**DW58LT – Transition Clip for 5/8" Drywall** – Facilitates transition from drywall to acoustical ceiling; one-sided hold-down clip; eliminates need for drywall bead. Locking tabs provide secure location for DGS tees.

**DW50LT – Transition Clip for 1/2" Drywall** – 125 pcs
**FZDW50LT** – 50 pcs



SUSPENSION SYSTEMS – Standard Accessories




LEED® is a registered trademark of the U.S. Green Building Council; Living Building Challenge® (LBC) is a registered trademark of the International Living Future Institute®; WELL™ and WELL Building Standard are trademarks of the International WELL Building Institute © 2026 AWI Licensing LLC


Armstrong® World Industries